



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL380a Gen11


(2.10 GHz, Intel Xeon Platinum 8570)

SPECspeed®2017\_fp\_base = 400

SPECspeed®2017\_fp\_peak = 400

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Jan-2024  
Hardware Availability: Feb-2024  
Software Availability: Dec-2023

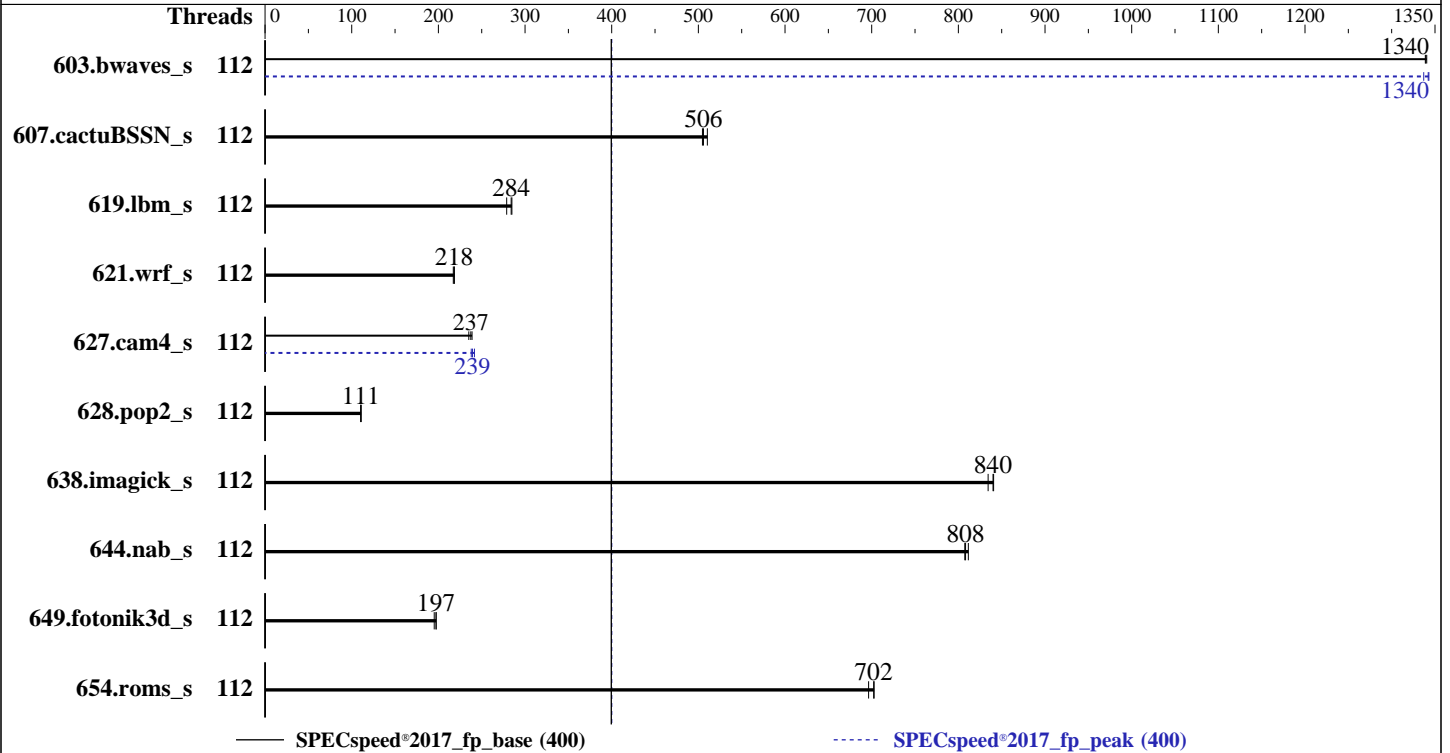

### Hardware

CPU Name: Intel Xeon Platinum 8570  
Max MHz: 4000  
Nominal: 2100  
Enabled: 112 cores, 2 chips  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 300 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R)  
Storage: 1 x 1.6 TB NVMe SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
Kernel 5.14.21-150500.53-default  
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
Parallel: Yes  
Firmware: HPE BIOS Version v2.12 12/19/2023 released Dec-2023  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

SPECspeed®2017\_fp\_base = 400

SPECspeed®2017\_fp\_peak = 400

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	112	44.1	1340	44.0	1340	<b>44.0</b>	<b>1340</b>	112	43.9	1340	44.1	1340	<b>44.0</b>	<b>1340</b>
607.cactuBSSN_s	112	<b>33.0</b>	<b>506</b>	32.7	510	33.0	505	112	<b>33.0</b>	<b>506</b>	32.7	510	33.0	505
619.lbm_s	112	18.4	285	18.8	279	<b>18.4</b>	<b>284</b>	112	18.4	285	18.8	279	<b>18.4</b>	<b>284</b>
621.wrf_s	112	60.9	217	60.6	218	<b>60.6</b>	<b>218</b>	112	60.9	217	60.6	218	<b>60.6</b>	<b>218</b>
627.cam4_s	112	<b>37.3</b>	<b>237</b>	37.7	235	37.1	239	112	37.2	238	<b>37.0</b>	<b>239</b>	36.7	242
628.pop2_s	112	<b>107</b>	<b>111</b>	107	111	107	110	112	<b>107</b>	<b>111</b>	107	111	107	110
638.imagick_s	112	17.2	841	<b>17.2</b>	<b>840</b>	17.3	834	112	17.2	841	<b>17.2</b>	<b>840</b>	17.3	834
644.nab_s	112	21.6	807	<b>21.6</b>	<b>808</b>	21.5	812	112	21.6	807	<b>21.6</b>	<b>808</b>	21.5	812
649.fotonik3d_s	112	<b>46.2</b>	<b>197</b>	46.7	195	46.2	197	112	<b>46.2</b>	<b>197</b>	46.7	195	46.2	197
654.roms_s	112	22.4	703	22.6	696	<b>22.4</b>	<b>702</b>	112	22.4	703	22.6	696	<b>22.4</b>	<b>702</b>

SPECspeed®2017\_fp\_base = 400

SPECspeed®2017\_fp\_peak = 400

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

**SPECspeed®2017\_fp\_base = 400**

**SPECspeed®2017\_fp\_peak = 400**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x21000200 for the Intel Xeon Platinum 8570 processor.

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute  
Thermal Configuration set to Maximum Cooling  
Intel Hyper-Threading set to Disabled  
Memory Patrol Scrubbing set to Disabled  
Enhanced Processor Performance Profile set to Aggressive  
Dead Block Predictor set to Enabled  
Last Level Cache (LLC) Prefetch set to Enabled  
Last Level Cache (LLC) Dead Line Allocation set to Disabled  
Workload Profile set to Custom  
Adjacent Sector Prefetch set to Disabled  
Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Wed Jan 24 19:56:41 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

-----  
1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

2. w  
19:56:41 up 1 min, 0 users, load average: 0.09, 0.05, 0.01  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

**SPECspeed®2017\_fp\_base = 400**

**SPECspeed®2017\_fp\_peak = 400**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```

core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 2062733
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 2062733
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 29
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fpspeed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=112 --tune base,peak -o all --define
  drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=112 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

### 6. /proc/cpuinfo

```

model name      : INTEL(R) XEON(R) PLATINUM 8570
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping      : 2
microcode     : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 56
siblings      : 56
2 physical ids (chips)
112 processors (hardware threads)
physical id 0: core ids 0-55
physical id 1: core ids 0-55
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

**SPECspeed®2017\_fp\_base = 400**

**SPECspeed®2017\_fp\_peak = 400**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

2,234,236,238

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 112
On-line CPU(s) list:   0-111
Vendor ID:              GenuineIntel
Model name:             INTEL(R) XEON(R) PLATINUM 8570
CPU family:             6
Model:                  207
Thread(s) per core:    1
Core(s) per socket:    56
Socket(s):              2
Stepping:               2
BogoMIPS:               4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             5.3 MiB (112 instances)
L1i cache:             3.5 MiB (112 instances)
L2 cache:              224 MiB (112 instances)
L3 cache:              600 MiB (2 instances)
NUMA node(s):          2
NUMA node0 CPU(s):    0-27,56-83
NUMA node1 CPU(s):    28-55,84-111
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

**SPECspeed®2017\_fp\_base = 400**

**SPECspeed®2017\_fp\_peak = 400**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	300M	600M	20	Unified	3	245760	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-27,56-83
node 0 size: 257727 MB
node 0 free: 256555 MB
node 1 cpus: 28-55,84-111
node 1 size: 257978 MB
node 1 free: 256952 MB
node distances:
node  0  1
  0: 10 20
  1: 20 10

```

9. `/proc/meminfo`

MemTotal: 528083284 kB

10. `who -r`

run-level 3 Jan 24 19:55

11. Systemd service manager version: `systemd 249 (249.16+suse.171.gdad0071f15)`

```

Default Target  Status
multi-user      running

```

12. Services, from `systemctl list-unit-files`

```

STATE      UNIT FILES
enabled    apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor
           nvme-fc-boot-connections postfix purge-kernels rollback sshd systemd-pstore wicked
           wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime
systemd-remount-fs
disabled   blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
           grub2-once haveged haveged-switch-root issue-add-ssh-keys kexec-load nvme-fc-autoconnect
           rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-network-generator
           systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
indirect   wickedd

```

13. Linux kernel boot-time arguments, from `/proc/cmdline`

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=8cfea0f2-51cb-41d3-956f-66e764c9dda6
splash=silent
resume=/dev/disk/by-uuid/f2fbd83d-34e7-4b60-be82-95ecb061302c
mitigations=auto
quiet
security=apparmor

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

**SPECspeed®2017\_fp\_base = 400**

**SPECspeed®2017\_fp\_peak = 400**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

14. cpupower frequency-info

analyzing CPU 0:

Unable to determine current policy

boost state support:

Supported: yes

Active: yes

-----  
15. tuned-adm active

Current active profile: throughput-performance

-----  
16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

-----  
17. /sys/kernel/mm/transparent\_hugepage

defrag always defer+madvice [madvice] never

enabled [always] madvice never

hpage\_pmd\_size 2097152

shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc\_sleep\_millisecs 60000

defrag 1

max\_ptes\_none 511

max\_ptes\_shared 256

max\_ptes\_swap 64

pages\_to\_scan 4096

scan\_sleep\_millisecs 10000

-----  
19. OS release

From /etc/\*-release /etc/\*-version

os-release SUSE Linux Enterprise Server 15 SP5

-----  
20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p3	xfs	946G	289G	658G	31%	/home

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

**SPECspeed®2017\_fp\_base = 400**

**SPECspeed®2017\_fp\_peak = 400**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Jan-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

-----  
21. /sys/devices/virtual/dmi/id  
Vendor: HPE  
Product: ProLiant DL380a Gen11  
Product Family: ProLiant  
Serial: CNX22602MZ  
-----

-----  
22. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Hynix HMCG88AGBRA193N 32 GB 2 rank 5600  
-----

-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: HPE  
BIOS Version: 2.12  
BIOS Date: 12/19/2023  
BIOS Revision: 2.12  
Firmware Revision: 1.56  
-----

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.10 GHz, Intel Xeon Platinum 8570)

SPECspeed®2017\_fp\_base = 400

SPECspeed®2017\_fp\_peak = 400

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.10 GHz, Intel Xeon Platinum 8570)

**SPECspeed®2017\_fp\_base = 400**

**SPECspeed®2017\_fp\_peak = 400**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.10 GHz, Intel Xeon Platinum 8570)

SPECspeed®2017\_fp\_base = 400

SPECspeed®2017\_fp\_peak = 400

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.10 GHz, Intel Xeon Platinum 8570)

SPECspeed®2017\_fp\_base = 400

SPECspeed®2017\_fp\_peak = 400

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Jan-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-01-24 09:26:40-0500.  
Report generated on 2024-03-18 10:10:15 by CPU2017 PDF formatter v6716.  
Originally published on 2024-03-15.