



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11


(2.10 GHz, Intel Xeon Bronze 3508U)

SPECrate®2017_fp_base = 81.5

SPECrate®2017_fp_peak = 82.1

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

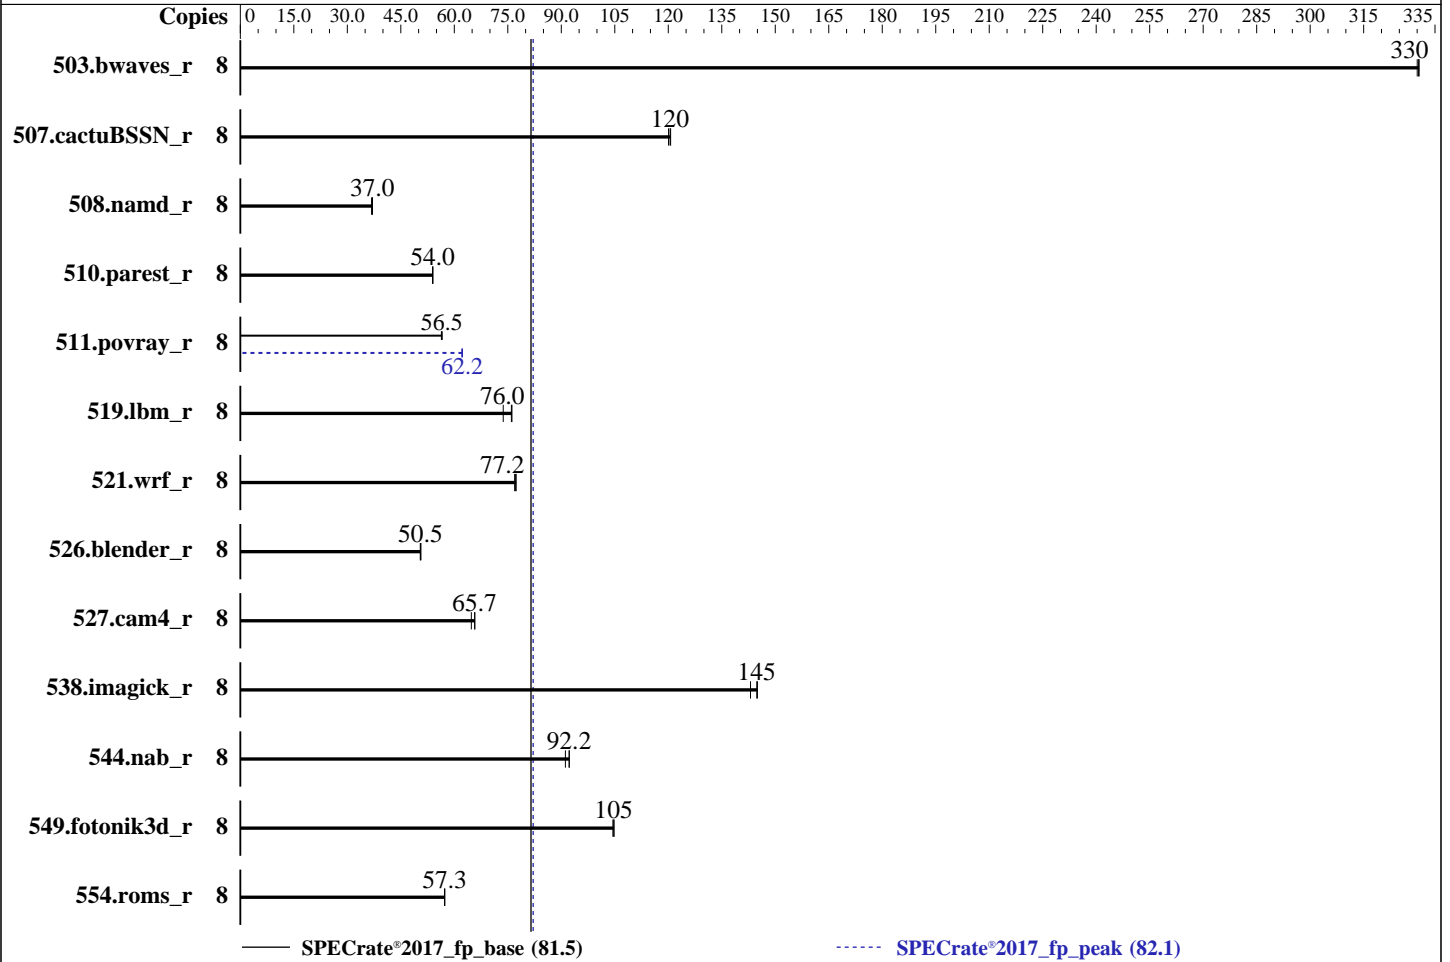

Hardware

CPU Name: Intel Xeon Bronze 3508U
Max MHz: 2200
Nominal: 2100
Enabled: 8 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 22.5 MB I+D on chip per chip
Other: None
Memory: 256 GB (8 x 32 GB 2Rx8 PC5-5600B-R, running at 4400)
Storage: 1 x 480 GB SATA SSD
Other: Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5
Kernel 5.14.21-150500.53-default
Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: HPE BIOS Version v2.12 12/13/2023 released Dec-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.10 GHz, Intel Xeon Bronze 3508U)

SPECrate®2017_fp_base = 81.5

SPECrate®2017_fp_peak = 82.1

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	8	243	331	243	330	<u>243</u>	<u>330</u>	8	243	331	243	330	<u>243</u>	<u>330</u>
507.cactuBSSN_r	8	83.9	121	84.3	120	<u>84.0</u>	<u>120</u>	8	83.9	121	84.3	120	<u>84.0</u>	<u>120</u>
508.namd_r	8	<u>205</u>	<u>37.0</u>	205	37.0	207	36.8	8	<u>205</u>	<u>37.0</u>	205	37.0	207	36.8
510.parest_r	8	388	53.9	388	54.0	<u>388</u>	<u>54.0</u>	8	388	53.9	388	54.0	<u>388</u>	<u>54.0</u>
511.povray_r	8	331	56.4	<u>331</u>	<u>56.5</u>	330	56.6	8	<u>300</u>	<u>62.2</u>	300	62.3	301	62.1
519.lbm_r	8	111	76.2	114	73.7	<u>111</u>	<u>76.0</u>	8	111	76.2	114	73.7	<u>111</u>	<u>76.0</u>
521.wrf_r	8	232	77.3	233	76.9	<u>232</u>	<u>77.2</u>	8	232	77.3	233	76.9	<u>232</u>	<u>77.2</u>
526.blender_r	8	241	50.5	<u>241</u>	<u>50.5</u>	241	50.6	8	241	50.5	<u>241</u>	<u>50.5</u>	241	50.6
527.cam4_r	8	213	65.8	<u>213</u>	<u>65.7</u>	216	64.8	8	213	65.8	<u>213</u>	<u>65.7</u>	216	64.8
538.imagick_r	8	139	143	<u>137</u>	<u>145</u>	137	145	8	139	143	<u>137</u>	<u>145</u>	137	145
544.nab_r	8	146	92.2	148	91.1	<u>146</u>	<u>92.2</u>	8	146	92.2	148	91.1	<u>146</u>	<u>92.2</u>
549.fotonik3d_r	8	298	104	<u>298</u>	<u>105</u>	297	105	8	298	104	<u>298</u>	<u>105</u>	297	105
554.roms_r	8	222	57.3	222	57.2	<u>222</u>	<u>57.3</u>	8	222	57.3	222	57.2	<u>222</u>	<u>57.3</u>

SPECrate®2017_fp_base = **81.5**

SPECrate®2017_fp_peak = **82.1**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.10 GHz, Intel Xeon Bronze 3508U)

SPECrate®2017_fp_base = 81.5

SPECrate®2017_fp_peak = 82.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000571 for the Intel Xeon Bronze 3508U processor.

BIOS Configuration:

Workload Profile set to General Throughput Compute.

Enhanced Processor Performance Profile set to Aggressive.

Thermal Configuration set to Maximum Cooling.

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Tue Mar 5 22:33:01 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

2. w
22:33:01 up 1 min, 0 users, load average: 0.08, 0.05, 0.02

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.10 GHz, Intel Xeon Bronze 3508U)

SPECrate®2017_fp_base = 81.5

SPECrate®2017_fp_peak = 82.1

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 1030709
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 1030709
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fprate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=8 -c
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=4 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=8 --configfile
  ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=4 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
  --runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/tempslogs/preenv.fprate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) BRONZE 3508U
vendor_id       : GenuineIntel
cpu family      : 6
model           : 143
stepping        : 8
microcode       : 0x2b000571
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores       : 8
siblings        : 8
1 physical ids (chips)
8 processors (hardware threads)
physical id 0: core ids 0-7
physical id 0: apicids 0,2,4,6,8,10,12,14
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.10 GHz, Intel Xeon Bronze 3508U)

SPECrate®2017_fp_base = 81.5

SPECrate®2017_fp_peak = 82.1

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                8
On-line CPU(s) list:   0-7
Vendor ID:             GenuineIntel
Model name:            INTEL(R) XEON(R) BRONZE 3508U
CPU family:            6
Model:                 143
Thread(s) per core:    1
Core(s) per socket:    8
Socket(s):             1
Stepping:              8
BogoMIPS:              4200.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             384 KiB (8 instances)
L1i cache:             256 KiB (8 instances)
L2 cache:              16 MiB (8 instances)
L3 cache:              22.5 MiB (1 instance)
NUMA node(s):         2
NUMA node0 CPU(s):    0,1,4,5
NUMA node1 CPU(s):    2,3,6,7
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	384K	12	Data	1	64	1	64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.10 GHz, Intel Xeon Bronze 3508U)

SPECrate®2017_fp_base = 81.5

SPECrate®2017_fp_peak = 82.1

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2024
Hardware Availability: Feb-2024
Software Availability: Dec-2023

Platform Notes (Continued)

L1i	32K	256K	8 Instruction	1	64	1	64
L2	2M	16M	16 Unified	2	2048	1	64
L3	22.5M	22.5M	15 Unified	3	24576	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-1,4-5
node 0 size: 128682 MB
node 0 free: 128008 MB
node 1 cpus: 2-3,6-7
node 1 size: 129017 MB
node 1 free: 128544 MB
node distances:
node  0  1
  0: 10  20
  1: 20  10

```

9. /proc/meminfo

MemTotal: 263885164 kB

10. who -r

run-level 3 Mar 5 22:31

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target  Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE      UNIT FILES
enabled    apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor postfix
           purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
           wickedd-dhcp6 wickedd-nanny
enabled-runtime  systemd-remount-fs
disabled        blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
           grub2-once haveged haveged-switch-root hwloc-dump-hwdata issue-add-ssh-keys kexec-load ksm
           kvm_stat lunmask multipathd rpmconfigcheck serial-getty@ systemd-boot-check-no-failures
           systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
           target-isns targetcli targetclid tuned
indirect     wickedd

```

13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=c791a00c-0ac0-437c-a123-380d9ca9a82f
splash=silent
resume=/dev/disk/by-uuid/2045128c-8306-498f-ba9c-cef6051d72af
mitigations=auto
quiet
security=apparmor

```

14. cpupower frequency-info

```

analyzing CPU 0:
  Unable to determine current policy

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.10 GHz, Intel Xeon Bronze 3508U)

SPECrate®2017_fp_base = 81.5

SPECrate®2017_fp_peak = 82.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

boost state support:

Supported: yes

Active: yes

15. tuned-adm active

Current active profile: throughput-performance

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

17. /sys/kernel/mm/transparent_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

19. OS release

From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdc4	xfs	155G	141G	14G	92%	/home

21. /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.10 GHz, Intel Xeon Bronze 3508U)

SPECrate®2017_fp_base = 81.5

SPECrate®2017_fp_peak = 82.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Platform Notes (Continued)

Vendor: HPE
Product: ProLiant DL320 Gen11
Product Family: ProLiant
Serial: CNX2210H28

22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x Hynix HMC88AGBRA193N 32 GB 2 rank 5600, configured at 4400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 2.12
BIOS Date: 12/13/2023
BIOS Revision: 2.12
Firmware Revision: 1.55

Compiler Version Notes

C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.10 GHz, Intel Xeon Bronze 3508U)

SPECrate®2017_fp_base = 81.5

SPECrate®2017_fp_peak = 82.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Compiler Version Notes (Continued)

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.10 GHz, Intel Xeon Bronze 3508U)

SPECrate®2017_fp_base = 81.5

SPECrate®2017_fp_peak = 82.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Base Portability Flags (Continued)

526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char

527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG

538.imagick_r: -DSPEC_LP64

544.nab_r: -DSPEC_LP64

549.fotonik3d_r: -DSPEC_LP64

554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math -flto

-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-nostandard-realloc-lhs -align array32byte -auto -ljemalloc

-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs

-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using Fortran, C, and C++:

-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512

-nostandard-realloc-lhs -align array32byte -auto -ljemalloc

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.10 GHz, Intel Xeon Bronze 3508U)

SPECrate®2017_fp_base = 81.5

SPECrate®2017_fp_peak = 82.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

`-L/usr/local/jemalloc64-5.0.1/lib`

Peak Compiler Invocation

C benchmarks:

`icx`

C++ benchmarks:

`icpx`

Fortran benchmarks:

`ifx`

Benchmarks using both Fortran and C:

`ifx icx`

Benchmarks using both C and C++:

`icpx icx`

Benchmarks using Fortran, C, and C++:

`icpx icx ifx`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

`519.lbm_r: basepeak = yes`

`538.imagick_r: basepeak = yes`

`544.nab_r: basepeak = yes`

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.10 GHz, Intel Xeon Bronze 3508U)

SPECrate®2017_fp_base = 81.5

SPECrate®2017_fp_peak = 82.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

508.namd_r: basepeak = yes

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL320 Gen11

(2.10 GHz, Intel Xeon Bronze 3508U)

SPECrate®2017_fp_base = 81.5

SPECrate®2017_fp_peak = 82.1

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-05 12:03:00-0500.

Report generated on 2024-03-27 20:18:20 by CPU2017 PDF formatter v6716.

Originally published on 2024-03-26.