



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant ML350 Gen11

(2.10 GHz, Intel Xeon Gold 6538N)

SPECspeed®2017\_fp\_base = 326

SPECspeed®2017\_fp\_peak = 326

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

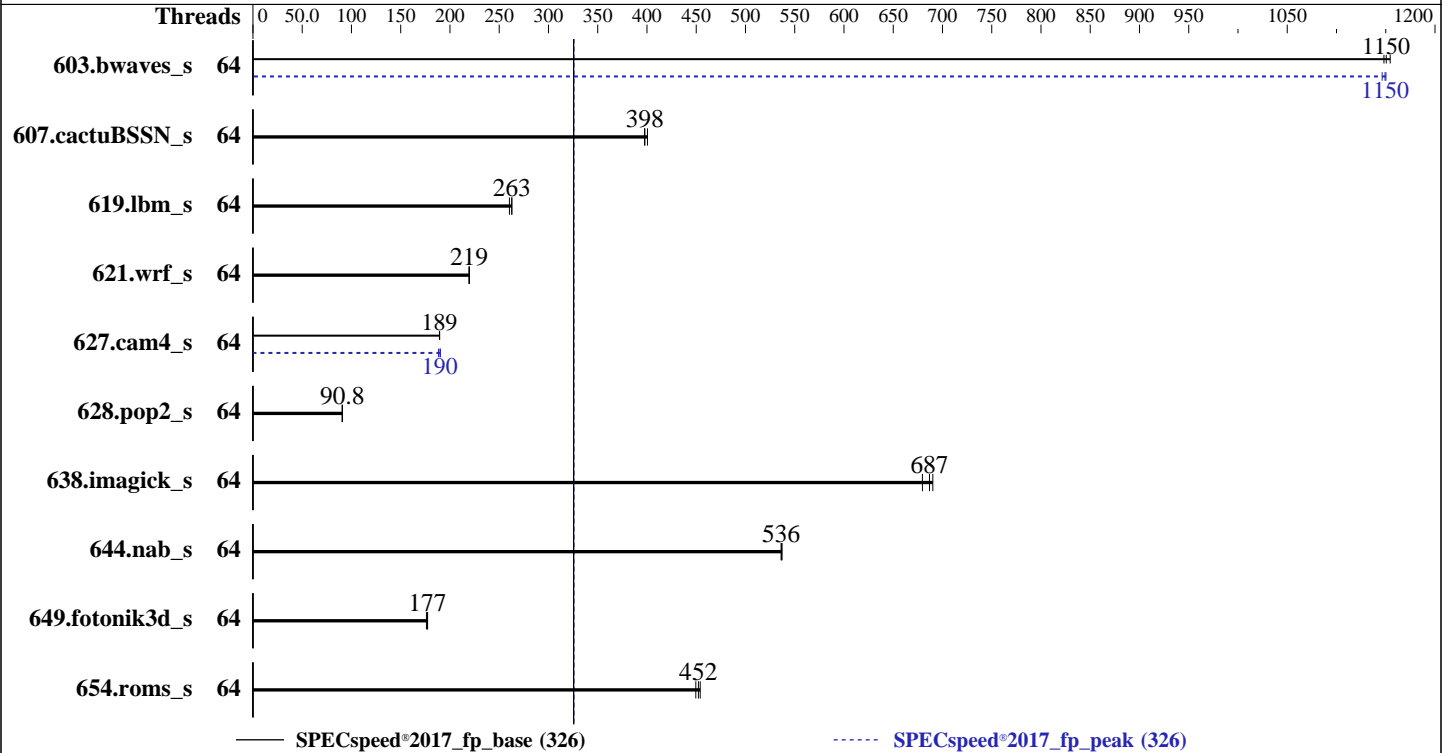

### Hardware

CPU Name: Intel Xeon Gold 6538N  
 Max MHz: 4100  
 Nominal: 2100  
 Enabled: 64 cores, 2 chips  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R, running at 5200)  
 Storage: 1 x 480 GB SATA SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 Kernel 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: HPE BIOS Version v2.12 12/13/2023 released Dec-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.10 GHz, Intel Xeon Gold 6538N)

SPECspeed®2017\_fp\_base = 326

SPECspeed®2017\_fp\_peak = 326

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: Mar-2024  
Hardware Availability: Feb-2024  
Software Availability: Dec-2023

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	51.1	1150	<b><u>51.3</u></b>	<b><u>1150</u></b>	51.4	1150	64	51.5	1150	51.3	1150	<b><u>51.3</u></b>	<b><u>1150</u></b>
607.cactuBSSN_s	64	41.6	400	<b><u>41.9</u></b>	<b><u>398</u></b>	41.9	398	64	41.6	400	<b><u>41.9</u></b>	<b><u>398</u></b>	41.9	398
619.lbm_s	64	<b><u>19.9</u></b>	<b><u>263</u></b>	20.1	260	19.9	263	64	<b><u>19.9</u></b>	<b><u>263</u></b>	20.1	260	19.9	263
621.wrf_s	64	60.2	220	<b><u>60.3</u></b>	<b><u>219</u></b>	60.3	219	64	60.2	220	<b><u>60.3</u></b>	<b><u>219</u></b>	60.3	219
627.cam4_s	64	<b><u>46.8</u></b>	<b><u>189</u></b>	46.8	190	46.8	189	64	46.6	190	<b><u>46.7</u></b>	<b><u>190</u></b>	47.1	188
628.pop2_s	64	131	90.8	131	90.6	<b><u>131</u></b>	<b><u>90.8</u></b>	64	131	90.8	131	90.6	<b><u>131</u></b>	<b><u>90.8</u></b>
638.imagick_s	64	<b><u>21.0</u></b>	<b><u>687</u></b>	21.2	680	20.9	690	64	<b><u>21.0</u></b>	<b><u>687</u></b>	21.2	680	20.9	690
644.nab_s	64	<b><u>32.6</u></b>	<b><u>536</u></b>	32.6	536	32.5	537	64	<b><u>32.6</u></b>	<b><u>536</u></b>	32.6	536	32.5	537
649.fotonik3d_s	64	51.4	177	51.8	176	<b><u>51.5</u></b>	<b><u>177</u></b>	64	51.4	177	51.8	176	<b><u>51.5</u></b>	<b><u>177</u></b>
654.roms_s	64	34.7	454	35.0	450	<b><u>34.8</u></b>	<b><u>452</u></b>	64	34.7	454	35.0	450	<b><u>34.8</u></b>	<b><u>452</u></b>

SPECspeed®2017\_fp\_base = 326

SPECspeed®2017\_fp\_peak = 326

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
tuned-adm profile was set to throughput-performance using "tuned-adm profile throughput-performance"
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Gold 6538N)

**SPECspeed®2017\_fp\_base = 326**

**SPECspeed®2017\_fp\_peak = 326**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes

### BIOS Configuration:

Workload Profile set to General Peak Frequency Compute  
 Thermal Configuration set to Maximum Cooling  
 Intel Hyper-Threading set to Disabled  
 Memory Patrol Scrubbing set to Disabled  
 Enhanced Processor Performance Profile set to Aggressive  
 Dead Block Predictor set to Enabled  
 Last Level Cache (LLC) Prefetch set to Enabled  
 Last Level Cache (LLC) Dead Line Allocation set to Disabled  
 Workload Profile set to Custom  
 Intel DMI Link Frequency set to Gen2 Speed  
 Adjacent Sector Prefetch set to Disabled  
 Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on localhost Fri Mar 15 15:10:37 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
15:10:37 up 1 min, 0 users, load average: 0.07, 0.04, 0.01
USER      TTY      FROM          LOGIN@      IDLE        JCPU       PCPU       WHAT
```

3. Username

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Gold 6538N)

SPECspeed®2017\_fp\_base = 326

SPECspeed®2017\_fp\_peak = 326

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

From environment variable \$USER: root

```

-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 2062780
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 2062780
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fpspeedTP.sh
runcpu --nobuild --action validate --define default-platform-flags -c
ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=64 --tune base,peak -o all --define
drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2023.2.3-lin-core-avx512-speed-20231121.cfg --define cores=64 --tune base,peak --output_format all
--define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) GOLD 6538N
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 32
siblings       : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Gold 6538N)

**SPECspeed®2017\_fp\_base = 326**

**SPECspeed®2017\_fp\_peak = 326**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

-----  
7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        46 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               64
On-line CPU(s) list:  0-63
Vendor ID:            GenuineIntel
Model name:           INTEL(R) XEON(R) GOLD 6538N
CPU family:           6
Model:                207
Thread(s) per core:   1
Core(s) per socket:   32
Socket(s):            2
Stepping:             2
BogoMIPS:             4200.00
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                    invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                    vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                    bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512v1
                    xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                    cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
                    avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                    avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                    cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                    arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:       VT-x
L1d cache:            3 MiB (64 instances)
L1i cache:            2 MiB (64 instances)
L2 cache:             128 MiB (64 instances)
L3 cache:             120 MiB (2 instances)
NUMA node(s):        2
NUMA node0 CPU(s):   0-15,32-47
NUMA node1 CPU(s):   16-31,48-63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:   Not affected
Vulnerability Mds:    Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                    sequence
Vulnerability Srbds:   Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Gold 6538N)

**SPECspeed®2017\_fp\_base = 326**

**SPECspeed®2017\_fp\_peak = 326**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Mar-2024  
**Hardware Availability:** Feb-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

L1d	48K	3M	12 Data	1	64	1	64
L1i	32K	2M	8 Instruction	1	64	1	64
L2	2M	128M	16 Unified	2	2048	1	64
L3	60M	120M	15 Unified	3	65536	1	64

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-15,32-47
node 0 size: 257733 MB
node 0 free: 256857 MB
node 1 cpus: 16-31,48-63
node 1 size: 257984 MB
node 1 free: 256961 MB
node distances:
node  0  1
  0:  10  20
  1:  20  10

```

### 9. /proc/meminfo

MemTotal: 528095428 kB

### 10. who -r

run-level 3 Mar 15 15:09

### 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

```

Default Target Status
multi-user      running

```

### 12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled apparmor auditd cron getty@ irqbalance issue-generator kbdsettings lvm2-monitor postfix
purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4
wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell
grub2-once haveged haveged-switch-root issue-add-ssh-keys kexec-load lunmask
rpmconfigcheck serial-getty@ systemd-boot-check-no-failures systemd-network-generator
systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned
indirect wickedd

```

### 13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=4ccef2cd-b32f-4b9b-bff5-7836c4f7ec60
splash=silent
resume=/dev/disk/by-uuid/812398c6-312b-4436-8363-5af4d15d5dc3
mitigations=auto
quiet
security=apparmor

```

### 14. cpupower frequency-info

```

analyzing CPU 0:
Unable to determine current policy

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Gold 6538N)

**SPECspeed®2017\_fp\_base = 326**

**SPECspeed®2017\_fp\_peak = 326**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

boost state support:

Supported: yes

Active: yes

-----  
15. tuned-adm active

Current active profile: throughput-performance

-----  
16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

-----  
17. /sys/kernel/mm/transparent\_hugepage

defrag	always	defer	defer+madvise	[madvise]	never
enabled	[always]	madvise	never		
hpage_pmd_size	2097152				
shmem_enabled	always	within_size	advise	[never]	deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_shared	256
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

-----  
19. OS release

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP5

-----  
20. Disk information

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	381G	132G	249G	35%	/home

-----  
21. /sys/devices/virtual/dmi/id

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Gold 6538N)

**SPECspeed®2017\_fp\_base = 326**

**SPECspeed®2017\_fp\_peak = 326**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

Vendor: HPE  
Product: ProLiant ML350 Gen11  
Product Family: ProLiant  
Serial: CNX20800N3

### 22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

16x Hynix HMC88AGBRA193N 32 GB 2 rank 5600, configured at 5200

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 2.12  
BIOS Date: 12/13/2023  
BIOS Revision: 2.12  
Firmware Revision: 1.54

## Compiler Version Notes

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Gold 6538N)

**SPECspeed®2017\_fp\_base = 326**

**SPECspeed®2017\_fp\_peak = 326**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

-assume byterecl

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math

-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp

-DSPEC\_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib

-ljemalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xCORE-AVX512 -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs

-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Benchmarks using both Fortran and C:

-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant ML350 Gen11**

(2.10 GHz, Intel Xeon Gold 6538N)

SPECspeed®2017\_fp\_base = 326

SPECspeed®2017\_fp\_peak = 326

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2024

**Hardware Availability:** Feb-2024

**Software Availability:** Dec-2023

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant ML350 Gen11

(2.10 GHz, Intel Xeon Gold 6538N)

SPECspeed®2017\_fp\_base = 326

SPECspeed®2017\_fp\_peak = 326

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2024

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

Fortran benchmarks:

```
603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-EMR-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-15 05:40:37-0400.

Report generated on 2024-04-09 15:48:44 by CPU2017 PDF formatter v6716.

Originally published on 2024-04-09.