



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 501

FusionServer XH321 V6 (Intel Xeon Platinum 8380)

SPECrate®2017_fp_peak = 503

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Apr-2024

Hardware Availability: Apr-2021

Software Availability: Dec-2023

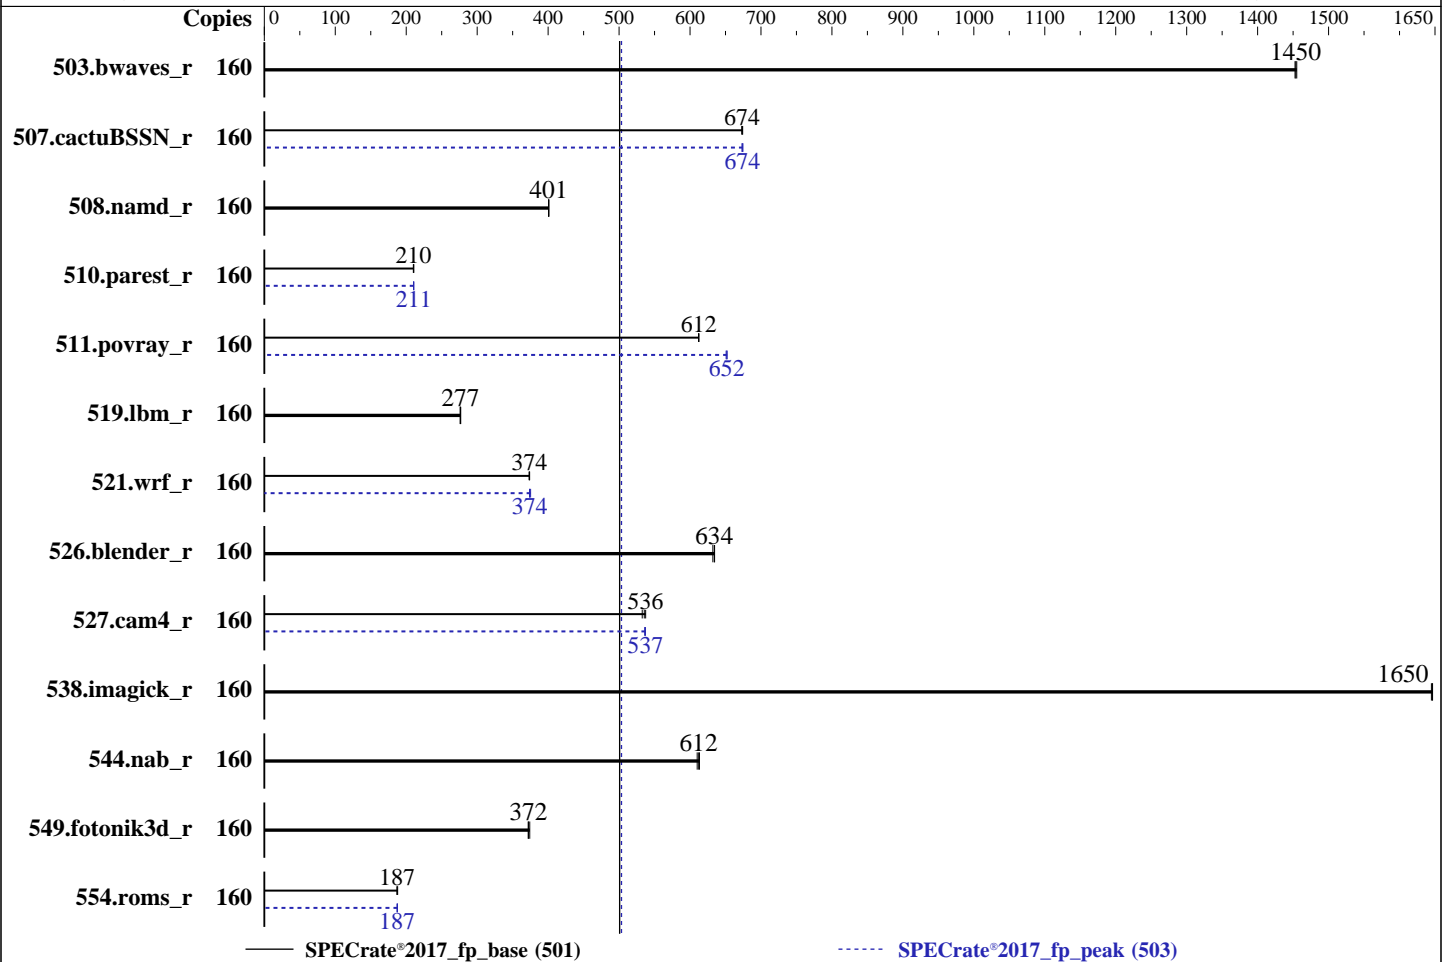

Hardware

CPU Name: Intel Xeon Platinum 8380
 Max MHz: 3400
 Nominal: 2300
 Enabled: 80 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 1920 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 8.4 (Ootpa)
 4.18.0-305.el8.x86_64
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2023.2.3 of Intel Fortran
 Compiler for Linux;
 Parallel: No
 Firmware: Version 1.68 Released Mar-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 501

FusionServer XH321 V6 (Intel Xeon Platinum 8380)

SPECrate®2017_fp_peak = 503

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2024
Hardware Availability: Apr-2021
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	160	<u>1104</u>	<u>1450</u>	1103	1460	1104	1450	160	<u>1104</u>	<u>1450</u>	1103	1460	1104	1450
507.cactuBSSN_r	160	300	674	301	673	<u>301</u>	<u>674</u>	160	<u>301</u>	<u>674</u>	301	673	300	675
508.namd_r	160	<u>379</u>	<u>401</u>	379	401	379	401	160	<u>379</u>	<u>401</u>	379	401	379	401
510.parest_r	160	1987	211	<u>1990</u>	<u>210</u>	1993	210	160	1989	210	1988	211	<u>1988</u>	<u>211</u>
511.povray_r	160	610	613	610	612	<u>610</u>	<u>612</u>	160	573	652	574	651	<u>573</u>	<u>652</u>
519.lbm_r	160	609	277	<u>610</u>	<u>277</u>	611	276	160	609	277	<u>610</u>	<u>277</u>	611	276
521.wrf_r	160	<u>959</u>	<u>374</u>	961	373	959	374	160	955	375	959	374	<u>958</u>	<u>374</u>
526.blender_r	160	385	632	384	635	<u>384</u>	<u>634</u>	160	385	632	384	635	<u>384</u>	<u>634</u>
527.cam4_r	160	525	533	<u>523</u>	<u>536</u>	521	537	160	<u>521</u>	<u>537</u>	521	537	522	536
538.imagick_r	160	<u>242</u>	<u>1650</u>	242	1640	242	1650	160	<u>242</u>	<u>1650</u>	242	1640	242	1650
544.nab_r	160	<u>440</u>	<u>612</u>	441	610	439	613	160	<u>440</u>	<u>612</u>	441	610	439	613
549.fotonik3d_r	160	1676	372	1667	374	<u>1675</u>	<u>372</u>	160	1676	372	1667	374	<u>1675</u>	<u>372</u>
554.roms_r	160	<u>1358</u>	<u>187</u>	1353	188	1360	187	160	1359	187	<u>1357</u>	<u>187</u>	1355	188

SPECrate®2017_fp_base = **501**

SPECrate®2017_fp_peak = **503**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/speccpu/lib/intel64:/home/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 501

FusionServer XH321 V6 (Intel Xeon Platinum 8380)

SPECrate®2017_fp_peak = 503

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2024
Hardware Availability: Apr-2021
Software Availability: Dec-2023

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enabled SNC2 (2-clusters)

Sysinfo program /home/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Apr 19 06:49:23 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 239 (239-45.e18)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. sysctl
- 16. /sys/kernel/mm/transparent_hugepage
- 17. /sys/kernel/mm/transparent_hugepage/khugepaged
- 18. OS release
- 19. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021 x86_64 x86_64 x86_64
GNU/Linux
```

```
2. w
06:49:23 up 7:59, 2 users, load average: 95.47, 143.25, 152.90
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 22:57 7:49m 1.36s 0.06s -bash
root pts/0 70.167.0.2 22:52 35:15 0.01s 0.01s -bash
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 501

FusionServer XH321 V6 (Intel Xeon Platinum 8380)

SPECrate®2017_fp_peak = 503

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2024
Hardware Availability: Apr-2021
Software Availability: Dec-2023

Platform Notes (Continued)

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) 0
data seg size          (kbytes, -d) unlimited
scheduling priority    (-e) 0
file size              (blocks, -f) unlimited
pending signals        (-i) 2060949
max locked memory      (kbytes, -l) 64
max memory size        (kbytes, -m) unlimited
open files             (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes     (-u) 2060949
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 17
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 160 -c ic2023.2.3-lin-core-avx512-rate-20231121.cfg --define
smt-on --define cores=80 --define physicalfirst --define invoke_with_interleave --define drop_caches
--tune base,peak -o all fprate
runcpu --define default-platform-flags --copies 160 --configfile
ic2023.2.3-lin-core-avx512-rate-20231121.cfg --define smt-on --define cores=80 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.022/templogs/preenv.fprate.022.0.log --lognum 022.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/specpcpu
```

6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
vendor_id      : GenuineIntel
cpu family     : 6
model         : 106
stepping      : 6
microcode     : 0xd0003b9
bugs          : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 40
siblings      : 80
2 physical ids (chips)
160 processors (hardware threads)
physical id 0: core ids 0-39
physical id 1: core ids 0-39
physical id 0: apicids 0-79
physical id 1: apicids 128-207
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 501

FusionServer XH321 V6 (Intel Xeon Platinum 8380)

SPECrate®2017_fp_peak = 503

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2024
Hardware Availability: Apr-2021
Software Availability: Dec-2023

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.32.1:

```

Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Byte Order:        Little Endian
CPU(s):            160
On-line CPU(s) list: 0-159
Thread(s) per core: 2
Core(s) per socket: 40
Socket(s):         2
NUMA node(s):     4
Vendor ID:         GenuineIntel
BIOS Vendor ID:   Intel(R) Corporation
CPU family:        6
Model:            106
Model name:        Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
BIOS Model name:   Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
Stepping:          6
CPU MHz:           3000.000
BogoMIPS:          4600.00
Virtualization:    VT-x
L1d cache:         48K
L1i cache:         32K
L2 cache:          1280K
L3 cache:          61440K
NUMA node0 CPU(s): 0-19,80-99
NUMA node1 CPU(s): 20-39,100-119
NUMA node2 CPU(s): 40-59,120-139
NUMA node3 CPU(s): 60-79,140-159
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
                  acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
                  arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
                  pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                  sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                  3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs ibpb stibp
                  ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil
                  hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                  clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
                  xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd
                  dtherm ida arat pln pts hwp_epp avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes
                  vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear
                  pconfig flush_lld arch_capabilities

```

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-19,80-99
node 0 size: 128272 MB
node 0 free: 109193 MB
node 1 cpus: 20-39,100-119
node 1 size: 128978 MB
node 1 free: 113513 MB
node 2 cpus: 40-59,120-139
node 2 size: 129015 MB
node 2 free: 113508 MB
node 3 cpus: 60-79,140-159

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 501

FusionServer XH321 V6 (Intel Xeon Platinum 8380)

SPECrate®2017_fp_peak = 503

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2024
Hardware Availability: Apr-2021
Software Availability: Dec-2023

Platform Notes (Continued)

```
node 3 size: 129010 MB
node 3 free: 113443 MB
node distances:
node 0 1 2 3
0: 10 11 20 20
1: 11 10 20 20
2: 20 20 10 11
3: 20 20 11 10
```

```
-----
9. /proc/meminfo
MemTotal: 527643068 kB
```

```
-----
10. who -r
run-level 3 Apr 18 22:49
```

```
-----
11. Systemd service manager version: systemd 239 (239-45.el8)
Default Target Status
multi-user running
```

```
-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd autovt@ chronyd crond
firewalld getty@ import-state kdump loadmodules lvm2-monitor mdmonitor microcode nis-domainname
rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd syslog timedatex udisks2
disabled blk-availability chrony-wait console-getty cpupower debug-shell ebttables iprdump iprint
iprupdate kvm_stat nftables rdisc rhcd rhsm rhsm-facts serial-getty@ sshd-keygen@
systemd-resolved tcsd
generated SystemTap compile-server gcc-toolset-10-stap-server gcc-toolset-10-systemtap
gcc-toolset-9-stap-server gcc-toolset-9-systemtap scripts startup
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
masked systemd-timedated
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-4.18.0-305.el8.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=auto
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
```

```
-----
15. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 501

FusionServer XH321 V6 (Intel Xeon Platinum 8380)

SPECrate®2017_fp_peak = 503

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2024
Hardware Availability: Apr-2021
Software Availability: Dec-2023

Platform Notes (Continued)

```

vm.compaction_proactiveness      0
vm.dirty_background_bytes        0
vm.dirty_background_ratio        10
vm.dirty_bytes                   0
vm.dirty_expire_centisecs       3000
vm.dirty_ratio                   20
vm.dirty_writeback_centisecs     500
vm.dirtytime_expire_seconds     43200
vm.extfrag_threshold             500
vm.min_unmapped_ratio           1
vm.nr_hugepages                  0
vm.nr_hugepages_mempolicy        0
vm.nr_overcommit_hugepages       0
vm.swappiness                    60
vm.watermark_boost_factor        15000
vm.watermark_scale_factor        10
vm.zone_reclaim_mode             0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 8.4 (Ootpa)
redhat-release  Red Hat Enterprise Linux release 8.4 (Ootpa)
system-release  Red Hat Enterprise Linux release 8.4 (Ootpa)

```

```

-----
19. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
itlb_multihit      Not affected
lltf                Not affected
mds                 Not affected
meltdown           Not affected
spec_store_bypass  Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1          Mitigation: usercopy/swapgs barriers and __user pointer sanitization
spectre_v2          Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds               Not affected
tsx_async_abort     Not affected
For more information, see the Linux documentation on hardware vulnerabilities, for example
https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html

```

```

-----
20. Disk information
SPEC is set to: /home/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   372G   85G  288G  23% /home

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 501

FusionServer XH321 V6 (Intel Xeon Platinum 8380)

SPECrate®2017_fp_peak = 503

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2024
Hardware Availability: Apr-2021
Software Availability: Dec-2023

Platform Notes (Continued)

21. /sys/devices/virtual/dmi/id
Vendor: XFUSION
Product: XH321 V6
Product Family: Whitley

22. dmidecode
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: XFUSION
BIOS Version: 1.68
BIOS Date: 03/14/2024
BIOS Revision: 1.68

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 501

FusionServer XH321 V6 (Intel Xeon Platinum 8380)

SPECrate®2017_fp_peak = 503

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2024
Hardware Availability: Apr-2021
Software Availability: Dec-2023

Compiler Version Notes (Continued)

Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 501

FusionServer XH321 V6 (Intel Xeon Platinum 8380)

SPECrate®2017_fp_peak = 503

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Apr-2024

Hardware Availability: Apr-2021

Software Availability: Dec-2023

Base Portability Flags (Continued)

```
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 501

FusionServer XH321 V6 (Intel Xeon Platinum 8380)

SPECrate®2017_fp_peak = 503

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2024
Hardware Availability: Apr-2021
Software Availability: Dec-2023

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 501

FusionServer XH321 V6 (Intel Xeon Platinum 8380)

SPECrate®2017_fp_peak = 503

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Apr-2024
Hardware Availability: Apr-2021
Software Availability: Dec-2023

Peak Optimization Flags (Continued)

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.2.xml>



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_fp_base = 501

FusionServer XH321 V6 (Intel Xeon Platinum 8380)

SPECrate®2017_fp_peak = 503

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Apr-2024

Hardware Availability: Apr-2021

Software Availability: Dec-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-19 06:49:23-0400.

Report generated on 2024-05-07 22:15:18 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-07.