



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECrate®2017\_fp\_base = 654

### PowerEdge C6620 (Intel Xeon Gold 6438Y+)

### SPECrate®2017\_fp\_peak = 679

CPU2017 License: 6573


Test Date: Mar-2024

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

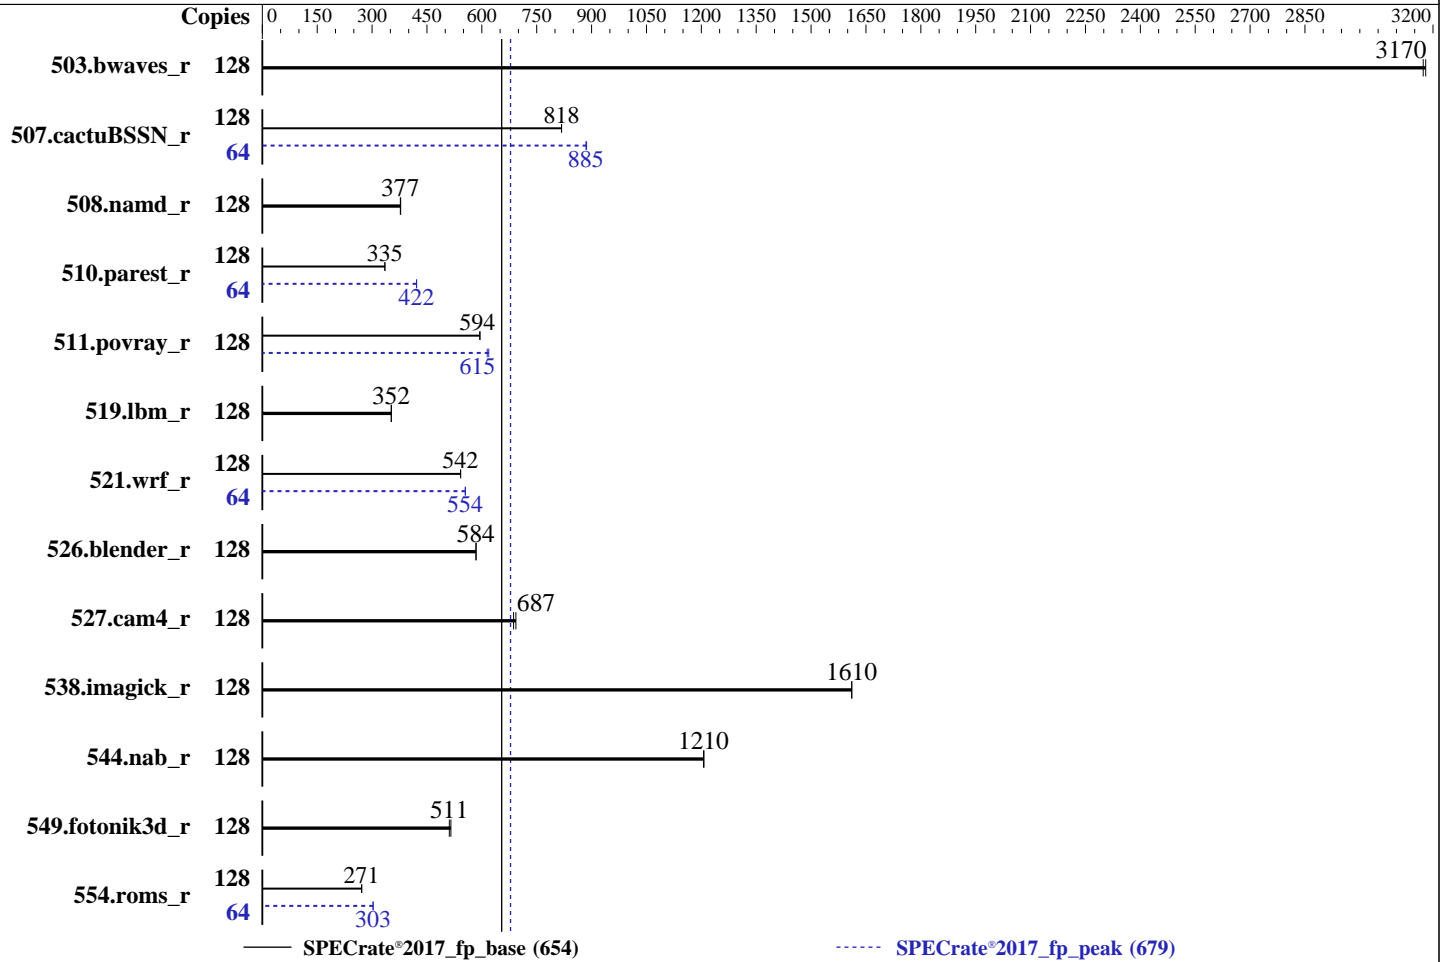

### Hardware

CPU Name: Intel Xeon Gold 6438Y+  
 Max MHz: 4000  
 Nominal: 2000  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)  
 Storage: 80 GB on tmpfs  
 Other: CPU Cooling: DLC

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran  
 Compiler for Linux;  
 Parallel: No  
 Firmware: Version 2.0.0 released Nov-2023  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance  
 at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 654

PowerEdge C6620 (Intel Xeon Gold 6438Y+)

SPECrate®2017\_fp\_peak = 679

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2024  
Hardware Availability: Apr-2023  
Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	404	3180	<b><u>405</u></b>	<b><u>3170</u></b>			128	404	3180	<b><u>405</u></b>	<b><u>3170</u></b>		
507.cactuBSSN_r	128	<b><u>198</u></b>	<b><u>818</u></b>	198	818			64	<b><u>91.6</u></b>	<b><u>885</u></b>	91.4	886		
508.namd_r	128	322	378	<b><u>322</u></b>	<b><u>377</u></b>			128	322	378	<b><u>322</u></b>	<b><u>377</u></b>		
510.parest_r	128	<b><u>1000</u></b>	<b><u>335</u></b>	999	335			64	397	422	<b><u>397</u></b>	<b><u>422</u></b>		
511.povray_r	128	502	595	<b><u>503</u></b>	<b><u>594</u></b>			128	<b><u>486</u></b>	<b><u>615</u></b>	483	619		
519.lbm_r	128	383	353	<b><u>383</u></b>	<b><u>352</u></b>			128	383	353	<b><u>383</u></b>	<b><u>352</u></b>		
521.wrf_r	128	529	542	<b><u>529</u></b>	<b><u>542</u></b>			64	<b><u>259</u></b>	<b><u>554</u></b>	258	555		
526.blender_r	128	334	585	<b><u>334</u></b>	<b><u>584</u></b>			128	334	585	<b><u>334</u></b>	<b><u>584</u></b>		
527.cam4_r	128	<b><u>326</u></b>	<b><u>687</u></b>	323	693			128	<b><u>326</u></b>	<b><u>687</u></b>	323	693		
538.imagick_r	128	198	1610	<b><u>198</u></b>	<b><u>1610</u></b>			128	198	1610	<b><u>198</u></b>	<b><u>1610</u></b>		
544.nab_r	128	<b><u>179</u></b>	<b><u>1210</u></b>	178	1210			128	<b><u>179</u></b>	<b><u>1210</u></b>	178	1210		
549.fotonik3d_r	128	968	515	<b><u>976</u></b>	<b><u>511</u></b>			128	968	515	<b><u>976</u></b>	<b><u>511</u></b>		
554.roms_r	128	748	272	<b><u>749</u></b>	<b><u>271</u></b>			64	<b><u>336</u></b>	<b><u>303</u></b>	335	303		

SPECrate®2017\_fp\_base = **654**

SPECrate®2017\_fp\_peak = **679**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/je5.0.1-64"
MALLOCCONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 654

PowerEdge C6620 (Intel Xeon Gold 6438Y+)

SPECrate®2017\_fp\_peak = 679

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Apr-2023

Software Availability: Dec-2023

## General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

ADDC Setting : Disabled  
DIMM Self Healing on  
Uncorrectable Memory Error : Disabled

Virtualization Technology : Disabled  
DCU Streamer Prefetcher : Disabled  
Sub NUMA Cluster : 2-way Clustering  
LLC Prefetch : Disabled  
Dead Line LLC Alloc : Disabled

System Profile : Custom  
CPU Power Management : Maximum Performance  
C1E : Disabled  
C States : Autonomous  
Memory Patrol Scrub : Disabled  
Energy Efficiency Policy : Performance  
PCI ASPM L1 Link  
Power Management : Disabled  
Optimizer Mode : Enabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Thu Mar 28 03:10:15 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpubower frequency-info

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 654

PowerEdge C6620 (Intel Xeon Gold 6438Y+)

SPECrate®2017\_fp\_peak = 679

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Apr-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

```

15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```

```

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

```

```

2. w
03:10:15 up 4:23, 1 user, load average: 82.98, 116.99, 123.50
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1    -                22:48   4:20m  1.18s  0.00s  /bin/bash ./dell-run-speccpu.sh rate
--define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define
DL-VERS=v4.8.6.1 --output_format html,pdf,txt

```

```

3. Username
From environment variable $USER: root

```

```

4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4126058
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126058
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
login -- root
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProc=1
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6.1 --output_format html,pdf,txt
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProc=1
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.6.1 --output_format html,pdf,txt
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 654

PowerEdge C6620 (Intel Xeon Gold 6438Y+)

SPECrate®2017\_fp\_peak = 679

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2024  
Hardware Availability: Apr-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

```
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --define DL-BIOS-SNC=2
--iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-addcd=1 --define DL-VERS=v4.8.6.1 --output_format html,pdf,txt fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --define
DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-addcd=1 --define DL-VERS=v4.8.6.1 --output_format html,pdf,txt --nopower --runmode rate --tune
base:peak --size refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.002/temlogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
```

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Gold 6438Y+
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode     : 0x2b000571
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 32
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Gold 6438Y+
CPU family:            6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
Stepping:               8
CPU max MHz:           4000.0000
CPU min MHz:           800.0000
BogoMIPS:               4000.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

## SPECrate®2017\_fp\_base = 654

## PowerEdge C6620 (Intel Xeon Gold 6438Y+)

## SPECrate®2017\_fp\_peak = 679

**CPU2017 License:** 6573  
**Test Sponsor:** Dell Inc.  
**Tested by:** Dell Inc.

**Test Date:** Mar-2024  
**Hardware Availability:** Apr-2023  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```
abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsavesopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts hfi avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
```

```
L1d cache: 3 MiB (64 instances)
L1i cache: 2 MiB (64 instances)
L2 cache: 128 MiB (64 instances)
L3 cache: 120 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,62,64,68,72,76,80,84,88,92,96,100,104,108,112,116,120,126
NUMA node1 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,60,66,70,74,78,82,86,90,94,98,102,106,110,114,118,122,124
NUMA node2 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101,105,109,113,117,121,125
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103,107,111,115,119,123,127

Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRBS-eIBRS SW sequence

Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus:
0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,62,64,68,72,76,80,84,88,92,96,100,104,108,112,116,120,126
node 0 size: 257457 MB
node 0 free: 256311 MB
node 1 cpus:
2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,60,66,70,74,78,82,86,90,94,98,102,106,110,114,118,122,124
node 1 size: 258039 MB
node 1 free: 248491 MB
node 2 cpus:
1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101,105,109,113,117,121,125
node 2 size: 258039 MB
node 2 free: 256947 MB
node 3 cpus:
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 654

PowerEdge C6620 (Intel Xeon Gold 6438Y+)

SPECrate®2017\_fp\_peak = 679

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2024  
Hardware Availability: Apr-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

3, 7, 11, 15, 19, 23, 27, 31, 35, 39, 43, 47, 51, 55, 59, 63, 67, 71, 75, 79, 83, 87, 91, 95, 99, 103, 107, 111, 115, 119, 123, 127

node 3 size: 258000 MB

node 3 free: 256912 MB

node distances:

node	0	1	2	3
0:	10	12	21	21
1:	12	10	21	21
2:	21	21	10	12
3:	21	21	12	10

9. /proc/meminfo  
MemTotal: 1056294788 kB

10. who -r  
run-level 3 Mar 27 22:46

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)  
Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings nvme-fc-boot-connections postfix purge-kernels rollback sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebtables grub2-once haveged haveged-switch-root issue-add-ssh-keys kexec-load lunmask nfs nfs-blkmap nfs-server nfs-server nfs-server nvmf-autoconnect rpcbind rpmconfigcheck rsyncd serial-getty@ systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
generated	ipmievd
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=aalf9d-5851-4d06-be29-02be8b9d35b8  
splash=silent  
mitigations=auto  
quiet  
security=apparmor

14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 4.00 GHz.  
The governor "powersave" may decide which speed to use within this range.  
boost state support:  
Supported: yes  
Active: yes

15. sysctl  
kernel.numa\_balancing 1

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 654

PowerEdge C6620 (Intel Xeon Gold 6438Y+)

SPECrate®2017\_fp\_peak = 679

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Apr-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

```

kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs    500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

```

```

-----
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
Filesystem  Type  Size  Used Avail Use% Mounted on
tmpfs       tmpfs  80G   4.1G   76G   6% /mnt/ramdisk

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      Dell Inc.
Product:     PowerEdge C6620
Product Family: PowerEdge
Serial:      SL6C201

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 654

PowerEdge C6620 (Intel Xeon Gold 6438Y+)

SPECrate®2017\_fp\_peak = 679

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Mar-2024  
Hardware Availability: Apr-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

Memory:  
16x 00CE063200CE M321R8GA0PB0-CWMKH 64 GB 2 rank 5600, configured at 4800

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: Dell Inc.  
BIOS Version: 2.0.0  
BIOS Date: 11/23/2023  
BIOS Revision: 2.0

## Compiler Version Notes

-----  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

-----  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

-----  
C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

-----  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

-----  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

-----  
Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 654

PowerEdge C6620 (Intel Xeon Gold 6438Y+)

SPECrate®2017\_fp\_peak = 679

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Apr-2023

Software Availability: Dec-2023

## Compiler Version Notes (Continued)

Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 654

PowerEdge C6620 (Intel Xeon Gold 6438Y+)

SPECrate®2017\_fp\_peak = 679

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Apr-2023

Software Availability: Dec-2023

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 654

PowerEdge C6620 (Intel Xeon Gold 6438Y+)

SPECrate®2017\_fp\_peak = 679

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Apr-2023

Software Availability: Dec-2023

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mprefer-vector-width=512  
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 654

PowerEdge C6620 (Intel Xeon Gold 6438Y+)

SPECrate®2017\_fp\_peak = 679

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Apr-2023

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

549.fotonik3d\_r: basepeak = yes

```
554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 654

PowerEdge C6620 (Intel Xeon Gold 6438Y+)

SPECrate®2017\_fp\_peak = 679

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2024

Hardware Availability: Apr-2023

Software Availability: Dec-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-03-28 03:10:15-0400.

Report generated on 2024-05-07 22:17:04 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-07.