



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 263

ThinkSystem SD550 V3
(2.40 GHz, Intel Xeon Platinum 8571N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017


Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

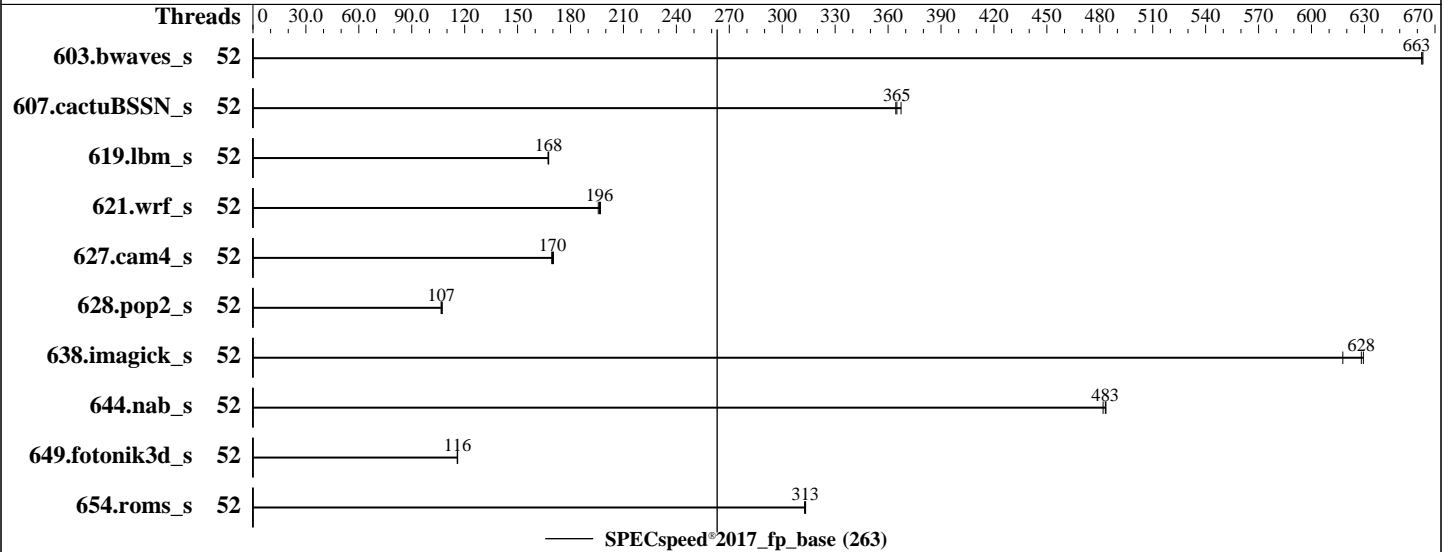

Hardware

CPU Name: Intel Xeon Platinum 8571N
 Max MHz: 4000
 Nominal: 2400
 Enabled: 52 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 300 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC5-5600B-R, running at 4800)
 Storage: 1 x 480 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5
 Kernel 5.14.21-150500.53-default
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: Yes
 Firmware: Lenovo BIOS Version FNE113F 2.20 released Jan-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD550 V3
(2.40 GHz, Intel Xeon Platinum 8571N)

SPECspeed®2017_fp_base = 263

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2024
Hardware Availability: Mar-2024
Software Availability: Mar-2024

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|---------|--------------------|-------------------|--------------------|-------------------|--------------------|-------------------|---------|---------|-------|---------|-------|---------|-------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 52 | 89.0 | 663 | <u>89.0</u> | <u>663</u> | 89.0 | 663 | | | | | | | |
| 607.cactuBSSN_s | 52 | 45.8 | 364 | 45.4 | 367 | <u>45.7</u> | <u>365</u> | | | | | | | |
| 619.lbm_s | 52 | <u>31.3</u> | <u>168</u> | 31.3 | 167 | 31.3 | 168 | | | | | | | |
| 621.wrf_s | 52 | 67.6 | 196 | <u>67.3</u> | <u>196</u> | 67.1 | 197 | | | | | | | |
| 627.cam4_s | 52 | <u>52.2</u> | <u>170</u> | 52.0 | 170 | 52.3 | 169 | | | | | | | |
| 628.pop2_s | 52 | <u>111</u> | <u>107</u> | 111 | 107 | 111 | 107 | | | | | | | |
| 638.imagick_s | 52 | 22.9 | 629 | 23.4 | 618 | <u>23.0</u> | <u>628</u> | | | | | | | |
| 644.nab_s | 52 | 36.1 | 483 | <u>36.2</u> | <u>483</u> | 36.3 | 482 | | | | | | | |
| 649.fotonik3d_s | 52 | <u>78.6</u> | <u>116</u> | 78.6 | 116 | 78.7 | 116 | | | | | | | |
| 654.roms_s | 52 | 50.4 | 313 | 50.3 | 313 | <u>50.3</u> | <u>313</u> | | | | | | | |

SPECspeed®2017_fp_base = 263

SPECspeed®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-ic2024.0.2/lib/intel64:/home/cpu2017-1.1.9-ic2024.0.2/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD550 V3
(2.40 GHz, Intel Xeon Platinum 8571N)

SPECspeed®2017_fp_base = 263

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2024

Hardware Availability: Mar-2024

Software Availability: Mar-2024

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

Hyper-Threading set to Disabled

Adjacent Cache Prefetch set to Disabled

AMP Prefetch set to Enable

Sysinfo program /home/cpu2017-1.1.9-ic2024.0.2/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost Wed Apr 10 15:42:15 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux

2. w
15:42:15 up 15 min, 1 user, load average: 1.14, 19.64, 18.07
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root tty1 - 15:27 39.00s 0.75s 0.00s sh
Run553-compliant-ic2024.0.2-lin-sapphirerapids-speedfp-base-smt-off-20231213.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD550 V3
(2.40 GHz, Intel Xeon Platinum 8571N)

SPECspeed®2017_fp_base = 263

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2024

Hardware Availability: Mar-2024

Software Availability: Mar-2024

Platform Notes (Continued)

```

data seg size      (kbytes, -d) unlimited
scheduling priority (-e) 0
file size          (blocks, -f) unlimited
pending signals    (-i) 2061915
max locked memory  (kbytes, -l) 64
max memory size    (kbytes, -m) unlimited
open files         (-n) 1024
pipe size          (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size         (kbytes, -s) unlimited
cpu time           (seconds, -t) unlimited
max user processes (-u) 2061915
virtual memory     (kbytes, -v) unlimited
file locks         (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
/bin/bash ./run_SD550V3_EMR_new.sh
sh Run553-compliant-ic2024.0.2-lin-sapphirerapids-speedfp-base-smt-off-20231213.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=52 --tune base -o all --define drop_caches
  fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=52 --tune base --output_format all
  --define drop_caches --nopower --runmode speed --tune base --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.180/templogs/preenv.fpspeed.180.0.log --lognum 180.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.0.2

```

```

-----
6. /proc/cpuinfo
model name      : INTEL(R) XEON(R) PLATINUM 8571N
vendor_id      : GenuineIntel
cpu family     : 6
model          : 207
stepping       : 2
microcode      : 0x21000200
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 52
siblings       : 52
1 physical ids (chips)
52 processors (hardware threads)
physical id 0: core ids 0-51
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 263

ThinkSystem SD550 V3
(2.40 GHz, Intel Xeon Platinum 8571N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Platform Notes (Continued)

```

Address sizes:          46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                52
On-line CPU(s) list:   0-51
Vendor ID:             GenuineIntel
Model name:            INTEL(R) XEON(R) PLATINUM 8571N
CPU family:            6
Model:                 207
Thread(s) per core:   1
Core(s) per socket:   52
Socket(s):             1
Stepping:              2
BogoMIPS:              4800.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                        cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities

Virtualization:        VT-x
L1d cache:             2.4 MiB (52 instances)
L1i cache:             1.6 MiB (52 instances)
L2 cache:              104 MiB (52 instances)
L3 cache:              300 MiB (1 instance)
NUMA node(s):         1
NUMA node0 CPU(s):    0-51
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
                        sequence
Vulnerability Srbds:    Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE          LEVEL   SETS PHY-LINE COHERENCY-SIZE
L1d    48K      2.4M    12 Data          1       64      1          64
L1i    32K      1.6M     8 Instruction    1       64      1          64
L2     2M       104M    16 Unified       2     2048      1          64
L3    300M      300M    20 Unified       3    245760      1          64

```

8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD550 V3
(2.40 GHz, Intel Xeon Platinum 8571N)

SPECspeed®2017_fp_base = 263

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2024
Hardware Availability: Mar-2024
Software Availability: Mar-2024

Platform Notes (Continued)

```
available: 1 nodes (0)
node 0 cpus: 0-51
node 0 size: 515508 MB
node 0 free: 513429 MB
node distances:
node 0
0: 10
```

```
-----
9. /proc/meminfo
MemTotal: 527881020 kB
```

```
-----
10. who -r
run-level 3 Apr 10 15:27
```

```
-----
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
Default Target Status
multi-user degraded
```

```
-----
12. Failed units, from systemctl list-units --state=failed
UNIT LOAD ACTIVE SUB DESCRIPTION
* ntp_sync.service loaded failed failed ntp_sync.service
```

```
-----
13. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ irqbalance issue-generator
kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd
systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewallld gpm grub2-once haveged haveged-switch-root ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
systemd-network-generator systemd-sysexec systemd-time-wait-sync systemd-timesyncd
generated ntp_sync
indirect wickedd
```

```
-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=1f1165ee-d57c-4884-9a69-769de0319f56
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
15. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD550 V3
(2.40 GHz, Intel Xeon Platinum 8571N)

SPECspeed®2017_fp_base = 263

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2024

Hardware Availability: Mar-2024

Software Availability: Mar-2024

Platform Notes (Continued)

```

16. sysctl
   kernel.numa_balancing      0
   kernel.randomize_va_space  2
   vm.compaction_proactiveness 20
   vm.dirty_background_bytes  0
   vm.dirty_background_ratio  10
   vm.dirty_bytes             0
   vm.dirty_expire_centisecs  3000
   vm.dirty_ratio             20
   vm.dirty_writeback_centisecs 500
   vm.dirtytime_expire_seconds 43200
   vm.extfrag_threshold       500
   vm.min_unmapped_ratio      1
   vm.nr_hugepages            0
   vm.nr_hugepages_mempolicy  0
   vm.nr_overcommit_hugepages 0
   vm.swappiness              60
   vm.watermark_boost_factor  15000
   vm.watermark_scale_factor  10
   vm.zone_reclaim_mode       0

-----
17. /sys/kernel/mm/transparent_hugepage
   defrag          always defer defer+madvise [madvise] never
   enabled         [always] madvise never
   hpage_pmd_size  2097152
   shmem_enabled   always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs  60000
   defrag                 1
   max_ptes_none          511
   max_ptes_shared        256
   max_ptes_swap          64
   pages_to_scan          4096
   scan_sleep_millisecs   10000

-----
19. OS release
   From /etc/*-release /etc/*-version
   os-release SUSE Linux Enterprise Server 15 SP5

-----
20. Disk information
   SPEC is set to: /home/cpu2017-1.1.9-ic2024.0.2
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/sda3       xfs   446G   69G  377G  16% /

-----
21. /sys/devices/virtual/dmi/id
   Vendor:      Lenovo
   Product:     ThinkSystem SD550 V3
   Product Family: ThinkSystem
   Serial:      1234567890

-----
22. dmidecode
   Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately

```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SD550 V3
(2.40 GHz, Intel Xeon Platinum 8571N)

SPECspeed®2017_fp_base = 263

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2024
Hardware Availability: Mar-2024
Software Availability: Mar-2024

Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

5x Samsung M321R8GA0PB0-CWMKH 64 GB 2 rank 5600, configured at 4800
3x Samsung M321R8GA0PB0-CWMXH 64 GB 2 rank 5600, configured at 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Lenovo
BIOS Version: FNE113F-2.20
BIOS Date: 01/02/2024
BIOS Revision: 2.20
Firmware Revision: 1.10

Compiler Version Notes

C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Fortran, C | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 263

ThinkSystem SD550 V3
(2.40 GHz, Intel Xeon Platinum 8571N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017_fp_base = 263

ThinkSystem SD550 V3
(2.40 GHz, Intel Xeon Platinum 8571N)

SPECspeed®2017_fp_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2024

Test Sponsor: Lenovo Global Technology

Hardware Availability: Mar-2024

Tested by: Lenovo Global Technology

Software Availability: Mar-2024

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-AA.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-10 03:42:15-0400.
Report generated on 2024-05-07 22:19:12 by CPU2017 PDF formatter v6716.
Originally published on 2024-05-07.