



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation


ZTE R5300G5 Server System
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 683

SPECrate®2017_fp_peak = 703

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

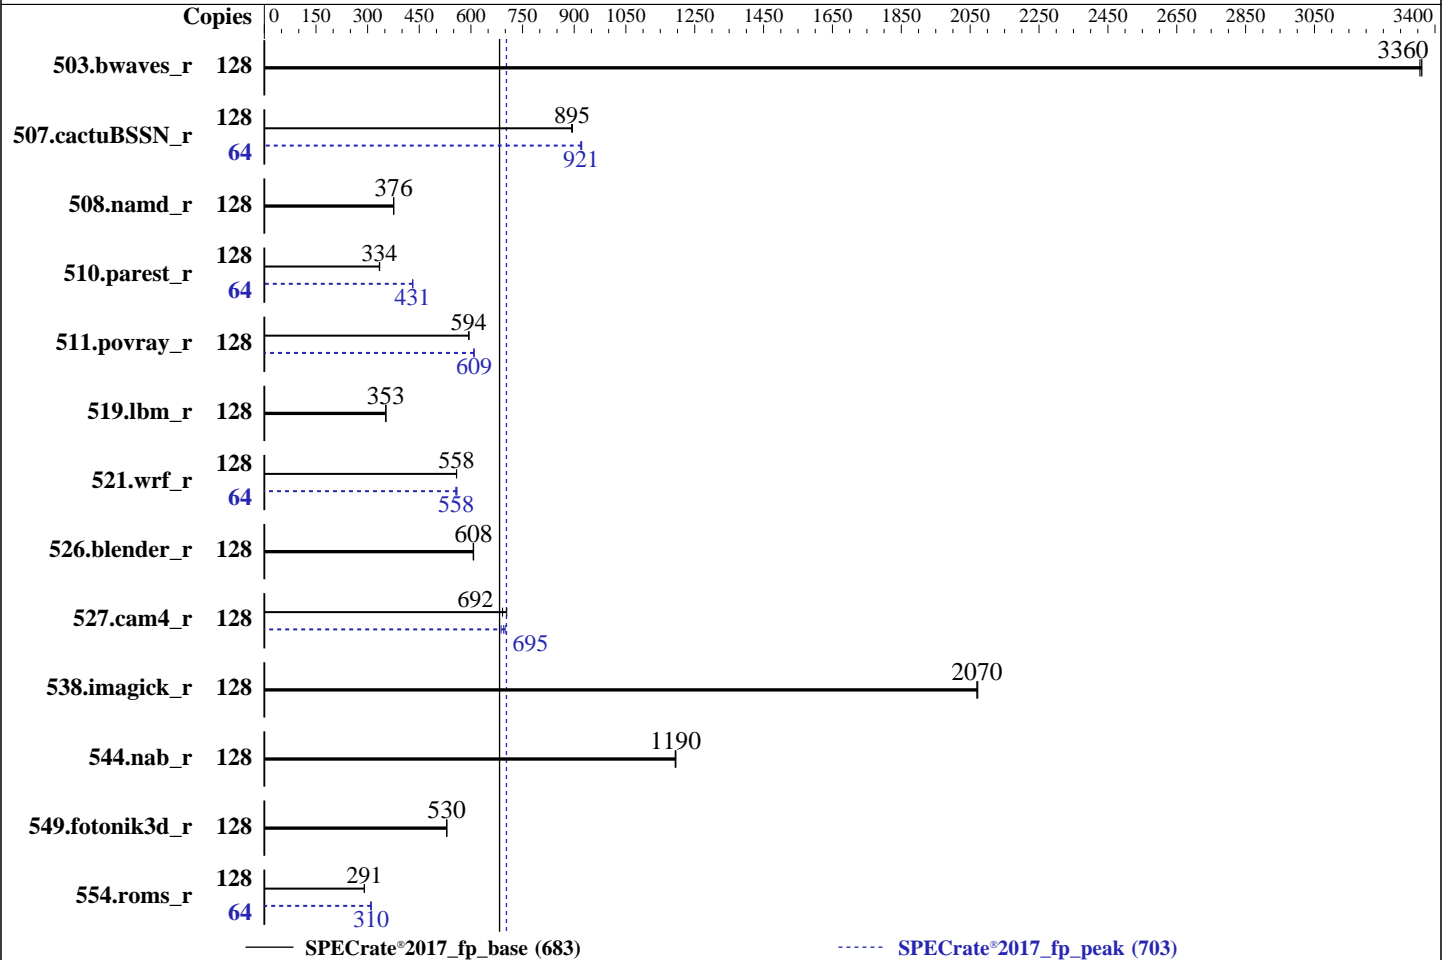

Hardware

CPU Name: Intel Xeon Gold 6430
 Max MHz: 3400
 Nominal: 2100
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R, running at 4400)
 Storage: 1 x 960 GB SATA SSD
 Other: CPU Cooling: Air

Software

OS: SUSE Linux Enterprise Server 15 SP5
 5.14.21-150500.53-default
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran
 Compiler for Linux;
 Parallel: No
 Firmware: Version 04.24.01.10 released Mar-2024
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost
 of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G5 Server System
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 683

SPECrate®2017_fp_peak = 703

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	382	3360	382	3360	<u>382</u>	<u>3360</u>	128	382	3360	382	3360	<u>382</u>	<u>3360</u>
507.cactuBSSN_r	128	<u>181</u>	<u>895</u>	182	893	181	895	64	87.9	922	<u>88.0</u>	<u>921</u>	88.2	919
508.namd_r	128	<u>324</u>	<u>376</u>	324	376	324	375	128	<u>324</u>	<u>376</u>	324	376	324	375
510.parest_r	128	999	335	1002	334	<u>1001</u>	<u>334</u>	64	<u>389</u>	<u>431</u>	389	431	388	431
511.povray_r	128	503	595	504	594	<u>503</u>	<u>594</u>	128	<u>491</u>	<u>609</u>	491	609	491	609
519.lbm_r	128	382	353	382	353	<u>382</u>	<u>353</u>	128	382	353	382	353	<u>382</u>	<u>353</u>
521.wrf_r	128	513	559	<u>514</u>	<u>558</u>	514	558	64	258	556	<u>257</u>	<u>558</u>	256	560
526.blender_r	128	321	607	321	608	<u>321</u>	<u>608</u>	128	321	607	321	608	<u>321</u>	<u>608</u>
527.cam4_r	128	<u>324</u>	<u>692</u>	324	692	318	704	128	326	688	<u>322</u>	<u>695</u>	320	700
538.imagick_r	128	154	2070	154	2070	<u>154</u>	<u>2070</u>	128	154	2070	154	2070	<u>154</u>	<u>2070</u>
544.nab_r	128	180	1200	<u>180</u>	<u>1190</u>	181	1190	128	180	1200	<u>180</u>	<u>1190</u>	181	1190
549.fotonik3d_r	128	942	530	<u>942</u>	<u>530</u>	941	530	128	942	530	<u>942</u>	<u>530</u>	941	530
554.roms_r	128	<u>700</u>	<u>291</u>	701	290	700	291	64	<u>328</u>	<u>310</u>	328	310	329	309

SPECrate®2017_fp_base = **683**

SPECrate®2017_fp_peak = **703**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/spec2017/lib/intel64:/home/spec2017/je5.0.1-64"
MALLOCONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G5 Server System
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 683

SPECrate®2017_fp_peak = 703

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:
ENERGY_PERF_BIAS_CFG mode = performance
LLC dead line alloc = Disabled
Patrol Scrub = Disabled
Intel VT for Directed I/O (VT-d) = Disabled
SR-IOV Support = Disabled
Sub NUMA(SNC) = Enable SNC4

Sysinfo program /home/spec2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Tue Apr 23 01:27:41 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

1. uname -a
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043/lp)
x86_64 x86_64 x86_64 GNU/Linux

2. w

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G5 Server System
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 683

SPECrate®2017_fp_peak = 703

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
01:27:41 up 5 min, 1 user, load average: 0.33, 1.62, 1.04
USER      TTY      FROM          LOGIN@      IDLE        JCPU      PCPU      WHAT
root      pts/0    198.168.111.123 01:24      13.00s     0.99s     0.00s     /bin/sh
./reportable-ic2024.0.2-lin-sapphirerapids-rate-smt-on-20231213.sh
```

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 4124632
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 4124632
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
/bin/sh ./reportable-ic2024.0.2-lin-sapphirerapids-rate-smt-on-20231213.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=64 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate fprate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.010/temlogs/preenv.fprate.010.0.log --lognum 010.0 --from_runcpu 2
specperl \$SPEC/bin/sysinfo
\$SPEC = /home/spec2017

6. /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6430
vendor_id : GenuineIntel
cpu family : 6
model : 143
stepping : 8
microcode : 0x2b000571
bugs : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores : 32
siblings : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G5 Server System
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 683

SPECrate®2017_fp_peak = 703

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Platform Notes (Continued)

physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 128-191

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      128
On-line CPU(s) list:        0-127
Vendor ID:                   GenuineIntel
Model name:                  Intel(R) Xeon(R) Gold 6430
CPU family:                  6
Model:                      143
Thread(s) per core:         2
Core(s) per socket:         32
Socket(s):                   2
Stepping:                   8
CPU max MHz:                 3400.0000
CPU min MHz:                 800.0000
BogoMIPS:                   4200.00
Flags:                       fpu_vme_de_pse_tsc_msr_pae_mce_cx8_apic_sep_mtrr_pge_mca_cmov_pat_pse36
                             clflush_dts_acpi_mmx_fxsr_sse_sse2_ss_ht_tm_pbe_syscall_nx_pdpe1gb_rdtscp
                             lm_constant_tsc_art_arch_perfmon_pebs_bts_rep_good_nopl_xtopology
                             nonstop_tsc_cpuid_aperfperf_tsc_known_freq_pni_pclmulqdq_dtes64_monitor
                             ds_cpl_smx_est_tm2_ssse3_sdbg_fma_cx16_xtpr_pdc_m_pcid_dca_sse4_1_sse4_2
                             x2apic_movbe_popcnt_tsc_deadline_timer_aes_xsave_avx_f16c_rdrand_lahf_lm
                             abm_3dnowprefetch_cpuid_fault_epb_cat_l3_cat_l2_cdp_l3_invpuid_single
                             intel_ppin_cdp_l2_ssbdb_mba_ibrs_ibpb_stibp_ibrs_enhanced_fsgsbase
                             tsc_adjust_bmi1_hle_avx2_smep_bmi2_erms_invpuid_rtm_cqm_rdt_a_avx512f
                             avx512dq_rdseed_adx_smap_avx512ifma_clflushopt_clwb_intel_pt_avx512cd
                             sha_ni_avx512bw_avx512vl_xsaveopt_xsavec_xgetbv1_xsaves_cqm_llc
                             cqm_occup_llc_cqm_mbm_total_cqm_mbm_local_split_lock_detect_avx_vnni
                             avx512_bf16_wbnoinvd_dtherm_ida_arat_pln_pts_hwp_hwp_act_window_hwp_epp
                             hwp_pkg_req_avx512vbmi_umip_pku_ospke_waitpkg_avx512_vbmi2_gfni_vaes
                             vpclmulqdq_avx512_vnni_avx512_bitalg_tme_avx512_vpoperntdq_la57_rdpid
                             bus_lock_detect_cldemote_movdiri_movdir64b_enqcmd_fsrmd_clear_serialize
                             tsxldtrk_pconfig_arch_lbr_avx512_fp16_amx_tile_flush_lld_arch_capabilities
L1d cache:                   3 MiB (64 instances)
L1i cache:                   2 MiB (64 instances)
L2 cache:                    128 MiB (64 instances)
L3 cache:                    120 MiB (2 instances)
NUMA node(s):                8
NUMA node0 CPU(s):          0-7,64-71
NUMA node1 CPU(s):          8-15,72-79
NUMA node2 CPU(s):          16-23,80-87
NUMA node3 CPU(s):          24-31,88-95
NUMA node4 CPU(s):          32-39,96-103
NUMA node5 CPU(s):          40-47,104-111
NUMA node6 CPU(s):          48-55,112-119
NUMA node7 CPU(s):          56-63,120-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G5 Server System
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 683

SPECrate®2017_fp_peak = 703

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Platform Notes (Continued)

Vulnerability Meltdown: Not affected
 Vulnerability Mmio stale data: Not affected
 Vulnerability Retbleed: Not affected
 Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
 Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
 Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBR SB-eIBRS SW sequence
 Vulnerability Srbds: Not affected
 Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 128527 MB
node 0 free: 128012 MB
node 1 cpus: 8-15,72-79
node 1 size: 129019 MB
node 1 free: 128515 MB
node 2 cpus: 16-23,80-87
node 2 size: 129019 MB
node 2 free: 127889 MB
node 3 cpus: 24-31,88-95
node 3 size: 129019 MB
node 3 free: 128561 MB
node 4 cpus: 32-39,96-103
node 4 size: 128985 MB
node 4 free: 127990 MB
node 5 cpus: 40-47,104-111
node 5 size: 129019 MB
node 5 free: 128541 MB
node 6 cpus: 48-55,112-119
node 6 size: 129019 MB
node 6 free: 127463 MB
node 7 cpus: 56-63,120-127
node 7 size: 128576 MB
node 7 free: 128193 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12
5:  21 21 21 21 12 10 12 12
6:  21 21 21 21 12 12 10 12
7:  21 21 21 21 12 12 12 10

```

9. /proc/meminfo

MemTotal: 1055937820 kB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G5 Server System
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 683

SPECrate®2017_fp_peak = 703

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Platform Notes (Continued)

10. who -r
run-level 3 Apr 23 01:26 last=5

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
Default Target Status
graphical running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager firewalld getty@ irqbalance issue-generator kbdsettings kdump kdump-early klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofsd autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info gpm grub2-once haveged haveged-switch-root ipmi ipmievd irqbindall issue-add-ssh-keys kexec-load ksm kvm_stat lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ set_kthread_prio smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 update-system-flatpaks upower vncserver@ wpa_supplicant@
indirect	pcscd saned@ wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default
root=UUID=66f36b99-6e13-4e26-a963-3ca58607d8e9
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=404M,high
crashkernel=72M,low

14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 800 MHz and 3.40 GHz.
The governor "performance" may decide which speed to use within this range.
boost state support:
Supported: yes
Active: yes

15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G5 Server System
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 683

SPECrate®2017_fp_peak = 703

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

vm.dirty_ratio                20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds  43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none           511
max_ptes_shared         256
max_ptes_swap           64
pages_to_scan           4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5

```

```

-----
19. Disk information
SPEC is set to: /home/spec2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       btrfs 811G  64G  747G   8% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          ZTE
Product:         R5300 G5
Product Family: Server
Serial:          219440501031

```

```

-----
21. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  16x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800, configured at 4400

```

22. BIOS

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G5 Server System
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 683

SPECrate®2017_fp_peak = 703

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Platform Notes (Continued)

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.
BIOS Version: 04.24.01.10
BIOS Date: 03/13/2024
BIOS Revision: 4.24

Compiler Version Notes

=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====

=====
Fortran, C | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.
=====



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G5 Server System
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 683

SPECrate®2017_fp_peak = 703

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G5 Server System
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 683

SPECrate®2017_fp_peak = 703

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G5 Server System
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 683

SPECrate®2017_fp_peak = 703

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Peak Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ZTE Corporation

ZTE R5300G5 Server System
(2.10 GHz, Intel Xeon Gold 6430)

SPECrate®2017_fp_base = 683

SPECrate®2017_fp_peak = 703

CPU2017 License: 9061
Test Sponsor: ZTE Corporation
Tested by: ZTE Corporation

Test Date: Apr-2024
Hardware Availability: Feb-2023
Software Availability: Dec-2023

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.2024-05-21.html>

<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-SPR-V1.10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.2024-05-21.xml>

<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-SPR-V1.10.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-22 13:27:41-0400.

Report generated on 2024-05-21 19:21:59 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-21.