



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant MicroServer Gen11

(2.60 Ghz, Intel Xeon E-2414)

SPECspeed®2017\_fp\_base = 56.8

SPECspeed®2017\_fp\_peak = 56.8

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Apr-2024

Hardware Availability: Jun-2024

Software Availability: Dec-2023

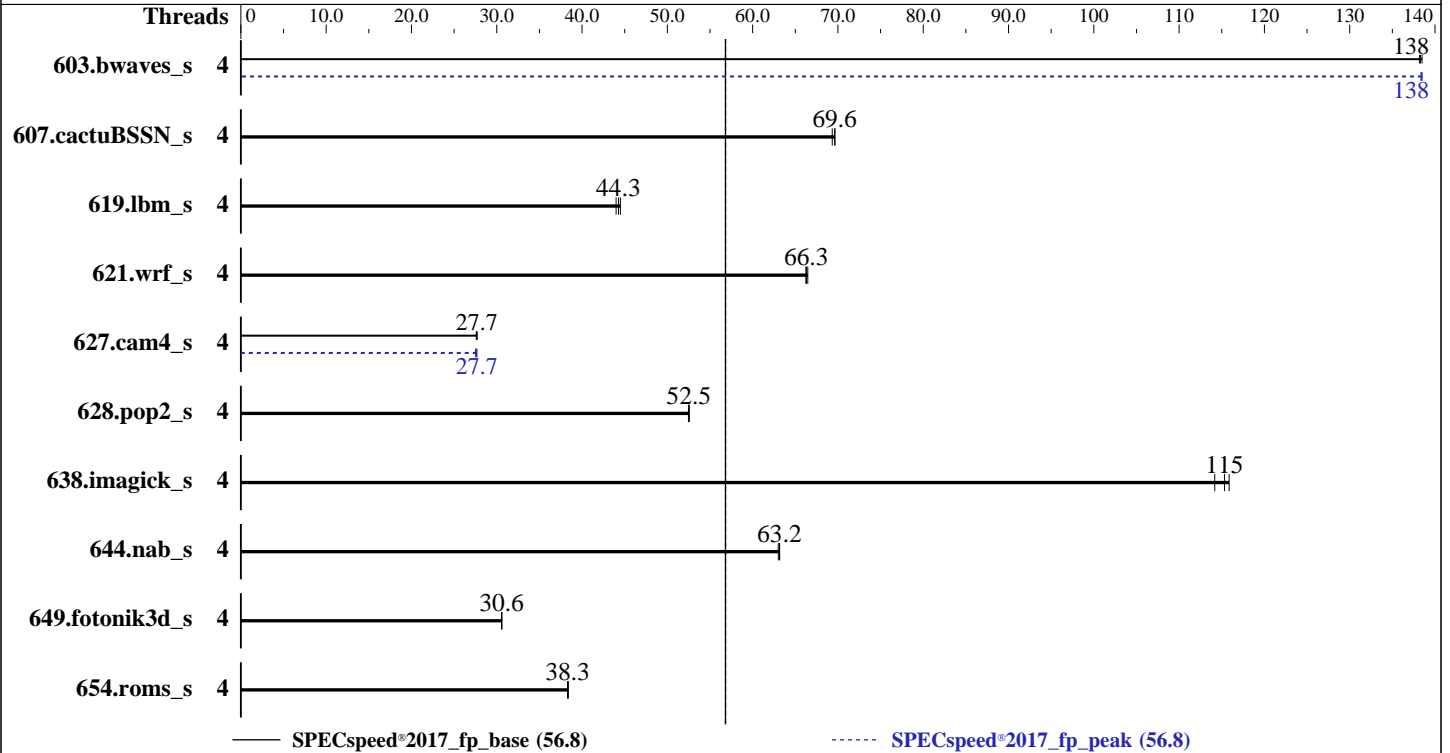

### Hardware

CPU Name: Intel Xeon E-2414  
 Max MHz: 4500  
 Nominal: 2600  
 Enabled: 4 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 12 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (2 x 32 GB 2Rx8 PC5-5600B-R, running at 4400), orderable using HPE part# P64339-B21  
 Storage: 1 x 1 TB 7.2 K SATA HDD  
 Other: CPU Cooling: Air

### Software

OS: Red Hat Enterprise Linux 9.2 (Plow)  
 Kernel 5.14.0-284.11.1.el9\_2.x86\_64  
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: HPE BIOS Version v1.48 03/14/2024 released Mar-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant MicroServer Gen11

(2.60 Ghz, Intel Xeon E-2414)

SPECspeed®2017\_fp\_base = 56.8

SPECspeed®2017\_fp\_peak = 56.8

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2024  
**Hardware Availability:** Jun-2024  
**Software Availability:** Dec-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	4	426	138	<b><u>427</u></b>	<b><u>138</u></b>	427	138	4	<b><u>426</u></b>	<b><u>138</u></b>	426	138	426	138
607.cactuBSSN_s	4	239	69.7	<b><u>239</u></b>	<b><u>69.6</u></b>	240	69.3	4	239	69.7	<b><u>239</u></b>	<b><u>69.6</u></b>	240	69.3
619.lbm_s	4	119	44.0	118	44.5	<b><u>118</u></b>	<b><u>44.3</u></b>	4	119	44.0	118	44.5	<b><u>118</u></b>	<b><u>44.3</u></b>
621.wrf_s	4	199	66.5	200	66.2	<b><u>199</u></b>	<b><u>66.3</u></b>	4	199	66.5	200	66.2	<b><u>199</u></b>	<b><u>66.3</u></b>
627.cam4_s	4	321	27.6	<b><u>320</u></b>	<b><u>27.7</u></b>	320	27.7	4	<b><u>320</u></b>	<b><u>27.7</u></b>	322	27.5	320	27.7
628.pop2_s	4	226	52.5	<b><u>226</u></b>	<b><u>52.5</u></b>	226	52.6	4	226	52.5	<b><u>226</u></b>	<b><u>52.5</u></b>	226	52.6
638.imagick_s	4	<b><u>125</u></b>	<b><u>115</u></b>	125	116	126	114	4	<b><u>125</u></b>	<b><u>115</u></b>	125	116	126	114
644.nab_s	4	<b><u>277</u></b>	<b><u>63.2</u></b>	277	63.0	277	63.2	4	<b><u>277</u></b>	<b><u>63.2</u></b>	277	63.0	277	63.2
649.fotonik3d_s	4	298	30.6	<b><u>298</u></b>	<b><u>30.6</u></b>	298	30.6	4	298	30.6	<b><u>298</u></b>	<b><u>30.6</u></b>	298	30.6
654.roms_s	4	<b><u>411</u></b>	<b><u>38.3</u></b>	410	38.4	411	38.3	4	<b><u>411</u></b>	<b><u>38.3</u></b>	410	38.4	411	38.3

SPECspeed®2017\_fp\_base = **56.8**

SPECspeed®2017\_fp\_peak = **56.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"
MALLOCONF = "retain:true"
OMP_STACKSIZE = "192M"
```

## General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant MicroServer Gen11**

(2.60 Ghz, Intel Xeon E-2414)

SPECspeed®2017\_fp\_base = 56.8

SPECspeed®2017\_fp\_peak = 56.8

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2024

**Software Availability:** Dec-2023

## Platform Notes

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute  
Thermal Configuration set to Maximum Cooling  
Enhanced Processor Performance Profile set to Enabled

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Wed Apr 10 07:51:46 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19\_2)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.e19_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT
2023 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
07:51:46 up 1 min, 0 users, load average: 0.16, 0.08, 0.02
USER      TTY      LOGIN@  IDLE   JCPU   PCPU   WHAT
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size                (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                    (blocks, -f) unlimited
pending signals              (-i) 256678
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant MicroServer Gen11**

(2.60 Ghz, Intel Xeon E-2414)

SPECspeed®2017\_fp\_base = 56.8

SPECspeed®2017\_fp\_peak = 56.8

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

max locked memory      (kbytes, -l) 8192
max memory size        (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues   (bytes, -q) 819200
real-time priority     (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes     (-u) 256678
virtual memory         (kbytes, -v) unlimited
file locks              (-x) unlimited

```

### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fpspeed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.0.2-lin-core-avx2-speed-20231213.cfg --define cores=4 --tune base,peak -o all --define drop_caches
  fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.0.2-lin-core-avx2-speed-20231213.cfg --define cores=4 --tune base,peak --output_format all --define
  drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv --note-preenv
  --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017

```

### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) E E-2414
vendor_id      : GenuineIntel
cpu family     : 6
model          : 183
stepping       : 1
microcode      : 0x121
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores      : 4
siblings       : 4
1 physical ids (chips)
4 processors (hardware threads)
physical id 0: core ids 0-3
physical id 0: apicids 0,2,4,6

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:     46 bits physical, 48 bits virtual
Byte Order:        Little Endian
CPU(s):            4
On-line CPU(s) list: 0-3
Vendor ID:         GenuineIntel
BIOS Vendor ID:   Intel(R) Corporation
Model name:        Intel(R) Xeon(R) E E-2414

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant MicroServer Gen11  
(2.60 Ghz, Intel Xeon E-2414)

SPECspeed®2017\_fp\_base = 56.8

SPECspeed®2017\_fp\_peak = 56.8

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2024  
**Hardware Availability:** Jun-2024  
**Software Availability:** Dec-2023

### Platform Notes (Continued)

```

BIOS Model name: Intel(R) Xeon(R) E E-2414
CPU family: 6
Model: 183
Thread(s) per core: 1
Core(s) per socket: 4
Socket(s): 1
Stepping: 1
BogoMIPS: 5222.40
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb invpcid_single ssbd ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase
tsc_adjust bmi1 avx2 smep bmi2 erms invpcid rdseed adx smap clflushopt
clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves split_lock_detect
avx_vnmi dtherm ida arat pln pts hfi umip pku ospke waitpkg gfni vaes
vpclmulqdq tme rdpid movdiri movdir64b fsrm md_clear serialize pconfig
arch_lbr ibt flush_lld arch_capabilities

Virtualization: VT-x
L1d cache: 192 KiB (4 instances)
L1i cache: 128 KiB (4 instances)
L2 cache: 8 MiB (4 instances)
L3 cache: 12 MiB (1 instance)
NUMA node(s): 1
NUMA node0 CPU(s): 0-3
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW
sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE
L1d 48K 192K 12 Data 1 64 1 64
L1i 32K 128K 8 Instruction 1 64 1 64
L2 2M 8M 16 Unified 2 2048 1 64
L3 12M 12M 6 Unified 3 32768 1 64

```

```

-----
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0-3
node 0 size: 64211 MB
node 0 free: 63612 MB
node distances:
node 0
0: 10
-----

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant MicroServer Gen11**

(2.60 Ghz, Intel Xeon E-2414)

SPECspeed®2017\_fp\_base = 56.8

SPECspeed®2017\_fp\_peak = 56.8

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2024  
**Hardware Availability:** Jun-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

9. /proc/meminfo

MemTotal: 65752552 kB

10. who -r

run-level 3 Apr 10 07:50

11. Systemd service manager version: systemd 252 (252-13.el9\_2)

Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond dbus-broker firewalld getty@ insights-client-boot irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd systemd-boot-update systemd-network-generator udisks2
enabled-runtime	systemd-remount-fs
disabled	blk-availability chrony-wait chronyd console-getty cpupower debug-shell dnf-system-upgrade kvm_stat man-db-restart-cache-update nftables rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9\_2.x86\_64  
root=/dev/mapper/rhel00-root  
ro  
resume=/dev/mapper/rhel00-swap  
rd.lvm.lv=rhel00/root  
rd.lvm.lv=rhel00/swap

14. cpupower frequency-info

analyzing CPU 0:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

15. sysctl

kernel.numa_balancing	0
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	20
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant MicroServer Gen11**

(2.60 Ghz, Intel Xeon E-2414)

SPECspeed®2017\_fp\_base = 56.8

SPECspeed®2017\_fp\_peak = 56.8

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2024

**Software Availability:** Dec-2023

## Platform Notes (Continued)

```

vm.nr_overcommit_hugepages      0
vm.swappiness                    60
vm.watermark_boost_factor       15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release           Red Hat Enterprise Linux 9.2 (Plow)
redhat-release       Red Hat Enterprise Linux release 9.2 (Plow)
system-release       Red Hat Enterprise Linux release 9.2 (Plow)

```

```

-----
19. Disk information
SPEC is set to: /home/CPU2017
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel00-home xfs   829G  84G  745G  11% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:              HPE
Product:             ProLiant MicroServer Gen11
Product Family:     ProLiant
Serial:              91ZV86L0HM

```

```

-----
21. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  2x Hynix HMC88AGBEA084N 32 GB 2 rank 5600, configured at 4400

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor:         HPE
BIOS Version:        1.48
BIOS Date:           03/14/2024
BIOS Revision:       1.48

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant MicroServer Gen11**

(2.60 Ghz, Intel Xeon E-2414)

SPECspeed®2017\_fp\_base = 56.8

SPECspeed®2017\_fp\_peak = 56.8

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** Apr-2024  
**Hardware Availability:** Jun-2024  
**Software Availability:** Dec-2023

## Platform Notes (Continued)

Firmware Revision: 1.56

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant MicroServer Gen11**

(2.60 Ghz, Intel Xeon E-2414)

SPECspeed®2017\_fp\_base = 56.8

SPECspeed®2017\_fp\_peak = 56.8

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2024

**Software Availability:** Dec-2023

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

### Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant MicroServer Gen11**

(2.60 Ghz, Intel Xeon E-2414)

SPECspeed®2017\_fp\_base = 56.8

SPECspeed®2017\_fp\_peak = 56.8

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2024

**Software Availability:** Dec-2023

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: -w -m64 -Wl,-z,muldefs -DSPEC\_OPENMP -xCORE-AVX2 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs  
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib  
-ljemalloc

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant MicroServer Gen11**

(2.60 Ghz, Intel Xeon E-2414)

SPECspeed®2017\_fp\_base = 56.8

SPECspeed®2017\_fp\_peak = 56.8

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Apr-2024

**Hardware Availability:** Jun-2024

**Software Availability:** Dec-2023

## Peak Optimization Flags (Continued)

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-RPL-rev2.0.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-RPL-rev2.0.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-09 22:21:46-0400.

Report generated on 2024-05-21 19:23:18 by CPU2017 PDF formatter v6716.

Originally published on 2024-05-21.