



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 216

FusionServer 1288H V7 (Intel Xeon Silver 4510T)

SPECrate®2017_int_peak = 222

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

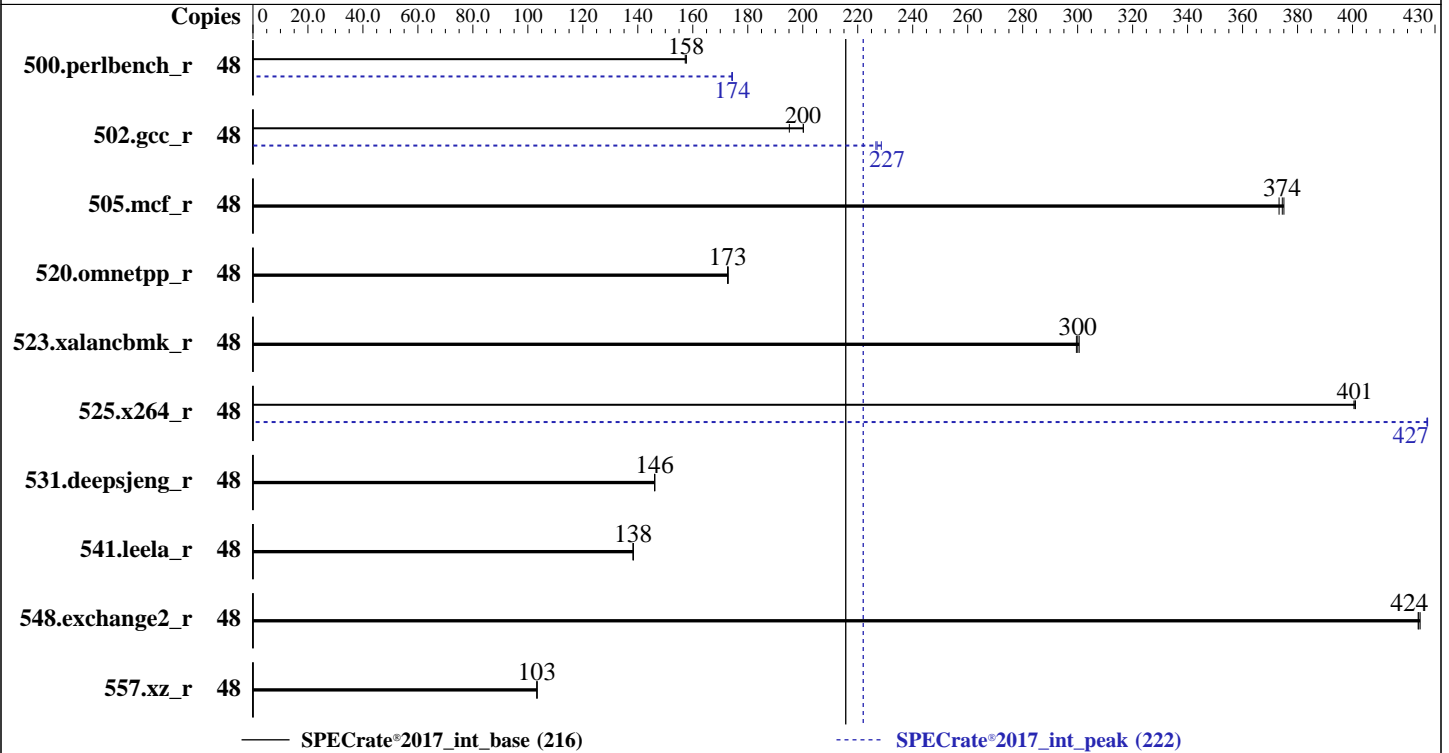

Hardware

CPU Name: Intel Xeon Silver 4510T
 Max MHz: 3700
 Nominal: 2000
 Enabled: 24 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 30 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-5600B-R, running at 4400)
 Storage: 1 x 1.92 TB SATA SSD
 Other: CPU Cooling: Air

Software

OS: Red Hat Enterprise Linux 9.2 (Plow)
 5.14.0-284.11.1.el9_2.x86_64
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2024.0.2 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 01.01.03.05 Released Apr-2024
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 216

FusionServer 1288H V7 (Intel Xeon Silver 4510T)

SPECrate®2017_int_peak = 222

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	485	158	486	157	485	158	48	438	174	438	174	439	174
502.gcc_r	48	348	195	339	200	339	200	48	300	227	299	227	297	229
505.mcf_r	48	207	374	208	373	207	375	48	207	374	208	373	207	375
520.omnetpp_r	48	365	173	364	173	365	173	48	365	173	364	173	365	173
523.xalancbmk_r	48	169	300	169	300	169	301	48	169	300	169	300	169	301
525.x264_r	48	210	401	210	401	210	401	48	197	427	197	427	197	427
531.deepsjeng_r	48	376	146	376	146	376	146	48	376	146	376	146	376	146
541.leela_r	48	575	138	575	138	575	138	48	575	138	575	138	575	138
548.exchange2_r	48	297	424	296	425	297	424	48	297	424	296	425	297	424
557.xz_r	48	502	103	502	103	502	103	48	502	103	502	103	502	103

SPECrate®2017_int_base = 216

SPECrate®2017_int_peak = 222

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Kernel Boot Parameter set with : nohz_full=1-47

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/Uniautos/speccpu2017/lib/intel64:/home/Uniautos/speccpu2017/lib/ia32:/home/Uniautos/speccpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 216

FusionServer 1288H V7 (Intel Xeon Silver 4510T)

SPECrate®2017_int_peak = 222

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

General Notes (Continued)

is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Performance Profile Set to Performance
SNC Set to Enable SNC2 (2-clusters)
Enable LP [Global] Set to ALL LPs

Sysinfo program /home/Uniautos/speccpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Jun 7 17:18:53 2024

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-13.e19_2)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-284.11.1.e19_2.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 12 10:45:03 EDT 2023 x86_64 x86_64 x86_64 GNU/Linux

2. w
17:18:53 up 2 min, 2 users, load average: 0.52, 0.65, 0.28
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 17:18 8.00s 1.42s 0.05s -bash

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 216

FusionServer 1288H V7 (Intel Xeon Silver 4510T)

SPECrate®2017_int_peak = 222

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```
root pts/0 17:17 45.00s 0.06s 0.06s -bash
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2060223
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2060223
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 48 -c ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg
--define smt-on --define cores=24 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base,peak -o all intrate
runcpu --define default-platform-flags --copies 48 --configfile
ic2024.0.2-lin-sapphirerapids-rate-20231213.cfg --define smt-on --define cores=24 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.081/templots/preenv.intrate.081.0.log --lognum 081.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Uniautos/speccpu2017
```

6. /proc/cpuinfo

```
model name      : INTEL(R) XEON(R) SILVER 4510T
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2b000590
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 12
siblings      : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-11
physical id 1: core ids 0-11
physical id 0: apicids 0-23
physical id 1: apicids 64-87
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 216

FusionServer 1288H V7 (Intel Xeon Silver 4510T)

SPECrate®2017_int_peak = 222

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            INTEL(R) XEON(R) SILVER 4510T
BIOS Model name:      INTEL(R) XEON(R) SILVER 4510T
CPU family:            6
Model:                 143
Thread(s) per core:   2
Core(s) per socket:   12
Socket(s):             2
Stepping:              8
BogoMIPS:              4000.00
Flags:                 fpu_vme_de_pse_tsc_msr_pae_mce_cx8_apic_sep_mtrr_pge_mca_cmov_pat_pse36
                      clflush_dts_acpi_mmx_fxsr_sse_sse2_ss_ht_tm_pbe_syscall_nx_pdpelgb_rdtscp
                      lm_constant_tsc_art_arch_perfmon_pebs_bts_rep_good_nopl_xtopology
                      nonstop_tsc_cpuid_aperfperf_tsc_known_freq_pni_pclmulqdq_dtes64_ds_cpl
                      vmx_smx_est_tm2_ssse3_sdbg_fma_cx16_xtpr_pdc_m_pcid_dca_sse4_1_sse4_2
                      x2apic_movbe_popcnt_tsc_deadline_timer_aes_xsave_avx_f16c_rdrand_lahf_lm
                      abm_3dnowprefetch_cpuid_fault_epb_cat_13_cat_12_cdp_13_invpcid_single
                      intel_ppin_cdp_l2_ssb_d_mba_ibrs_ibpb_stibp_ibrs_enhanced_tpr_shadow_vnmi
                      flexpriority_ept_vpid_ept_ad_fsgsbase_tsc_adjust_bmi1_avx2_smep_bmi2_erms
                      invpcid_cqm_rdt_a_avx512f_avx512dq_rdseed_adx_smmap_avx512ifma_clflushopt
                      clwb_intel_pt_avx512cd_sha_ni_avx512bw_avx512v1_xsaveopt_xsavec_xgetbv1
                      xsaves_cqm_llc_cqm_occup_llc_cqm_mbm_total_cqm_mbm_local_split_lock_detect
                      avx_vnni_avx512_bf16_wbnoinvd_dtherm_ida_arat_pln_pts_hfi_avx512vbmi_umip
                      pku_ospke_waitpkg_avx512_vbmi2_gfni_vaes_vpclmulqdq_avx512_vnni
                      avx512_bitalg_tme_avx512_vpopcntdq_la57_rdpid_bus_lock_detect_cldemote
                      movdiri_movdir64b_enqcmd_fsr_m_d_clear_serialize_tsxldtrk_pconfig_arch_lbr
                      ibt_amx_bf16_avx512_fp16_amx_tile_amx_int8_flush_lld_arch_capabilities
Virtualization:        VT-x
L1d cache:             1.1 MiB (24 instances)
L1i cache:             768 KiB (24 instances)
L2 cache:              48 MiB (24 instances)
L3 cache:              60 MiB (2 instances)
NUMA node(s):         4
NUMA node0 CPU(s):    0-5,24-29
NUMA node1 CPU(s):    6-11,30-35
NUMA node2 CPU(s):    12-17,36-41
NUMA node3 CPU(s):    18-23,42-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:    Not affected
Vulnerability Mds:     Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSE-eIBRS SW

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 216

FusionServer 1288H V7 (Intel Xeon Silver 4510T)

SPECrate®2017_int_peak = 222

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	1.1M	12	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	2M	48M	16	Unified	2	2048	1	64
L3	30M	60M	15	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-5,24-29
node 0 size: 128079 MB
node 0 free: 121867 MB
node 1 cpus: 6-11,30-35
node 1 size: 128981 MB
node 1 free: 128469 MB
node 2 cpus: 12-17,36-41
node 2 size: 129021 MB
node 2 free: 128492 MB
node 3 cpus: 18-23,42-47
node 3 size: 129016 MB
node 3 free: 127729 MB
node distances:
node  0  1  2  3
  0: 10 12 21 21
  1: 12 10 21 21
  2: 21 21 10 12
  3: 21 21 12 10

```

9. /proc/meminfo

MemTotal: 527460828 kB

10. who -r

run-level 3 Jun 7 17:16

11. Systemd service manager version: systemd 252 (252-13.el9_2)

Default Target	Status
multi-user	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* sep5.service	loaded	failed	failed	systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd crond dbus-broker getty@ insights-client-boot irqbalance kdump lvm2-monitor mdmonitor microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd systemd-boot-update systemd-network-generator tuned udisks2
enabled-runtime	systemd-remount-fs

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 216

FusionServer 1288H V7 (Intel Xeon Silver 4510T)

SPECrate®2017_int_peak = 222

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

disabled blk-availability console-getty cpupower debug-shell dnf-system-upgrade firewalld kvm_stat man-db-restart-cache-update nftables rdisc rhcd rhsm rhsm-facts rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysextr
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate systemd-sysupdate-reboot

14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-284.11.1.el9_2.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
nohz_full=1-47

15. cpupower frequency-info
analyzing CPU 0:
Unable to determine current policy
boost state support:
Supported: yes
Active: yes

16. tuned-adm active
Current active profile: throughput-performance

17. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 2
vm.compaction_proactiveness 20
vm.dirty_background_bytes 0
vm.dirty_background_ratio 10
vm.dirty_bytes 0
vm.dirty_expire_centisecs 3000
vm.dirty_ratio 40
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold 500
vm.min_unmapped_ratio 1
vm.nr_hugepages 0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness 10
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode 0

18. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvice [madvice] never
enabled [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 216

FusionServer 1288H V7 (Intel Xeon Silver 4510T)

SPECrate®2017_int_peak = 222

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Platform Notes (Continued)

```

19. /sys/kernel/mm/transparent_hugepage/khugepaged
   alloc_sleep_millisecs 60000
   defrag                 1
   max_ptes_none         511
   max_ptes_shared       256
   max_ptes_swap         64
   pages_to_scan         4096
   scan_sleep_millisecs 10000

```

```

20. OS release
   From /etc/*-release /etc/*-version
   os-release           Red Hat Enterprise Linux 9.2 (Plow)
   redhat-release       Red Hat Enterprise Linux release 9.2 (Plow)
   system-release       Red Hat Enterprise Linux release 9.2 (Plow)

```

```

21. Disk information
   SPEC is set to: /home/Uniautos/speccpu2017
   Filesystem      Type  Size  Used Avail Use% Mounted on
   /dev/mapper/rhel-home xfs   1.7T  186G  1.5T  11% /home

```

```

22. /sys/devices/virtual/dmi/id
   Vendor:          XFUSION
   Product:         1288H V7
   Product Family:  Eagle Stream
   Serial:          00000000

```

```

23. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     2x Samsung M321R4GA3PB0-CWMCH 32 GB 2 rank 5600, configured at 4400
     14x Samsung M321R4GA3PB0-CWMXH 32 GB 2 rank 5600, configured at 4400

```

```

24. BIOS
   (This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:      XFUSION
   BIOS Version:     01.01.03.05
   BIOS Date:        04/12/2024
   BIOS Revision:    3.5

```

Compiler Version Notes

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 216

FusionServer 1288H V7 (Intel Xeon Silver 4510T)

SPECrate®2017_int_peak = 222

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Compiler Version Notes (Continued)

| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 216

FusionServer 1288H V7 (Intel Xeon Silver 4510T)

SPECrate®2017_int_peak = 222

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Base Portability Flags (Continued)

```
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 216

FusionServer 1288H V7 (Intel Xeon Silver 4510T)

SPECrate®2017_int_peak = 222

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Jun-2024
Hardware Availability: Dec-2023
Software Availability: Dec-2023

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmallo

502.gcc_r: -m32 -L/opt/intel/oneapi/compiler/2024.0/lib32 -std=gnu89
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemallo

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/opt/intel/oneapi/compiler/2024.0/lib -lqkmallo

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 216

FusionServer 1288H V7 (Intel Xeon Silver 4510T)

SPECrate®2017_int_peak = 222

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2024

Hardware Availability: Dec-2023

Software Availability: Dec-2023

Peak Optimization Flags (Continued)

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-EMR-V1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2024-06-07 05:18:53-0400.

Report generated on 2024-07-03 09:23:26 by CPU2017 PDF formatter v6716.

Originally published on 2024-07-02.