



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_fp\_base = 315

## PowerEdge C6620 (Intel Xeon Max 9462)

SPECspeed®2017\_fp\_peak = 313

CPU2017 License: 6573


Test Date: Apr-2024

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Dec-2023

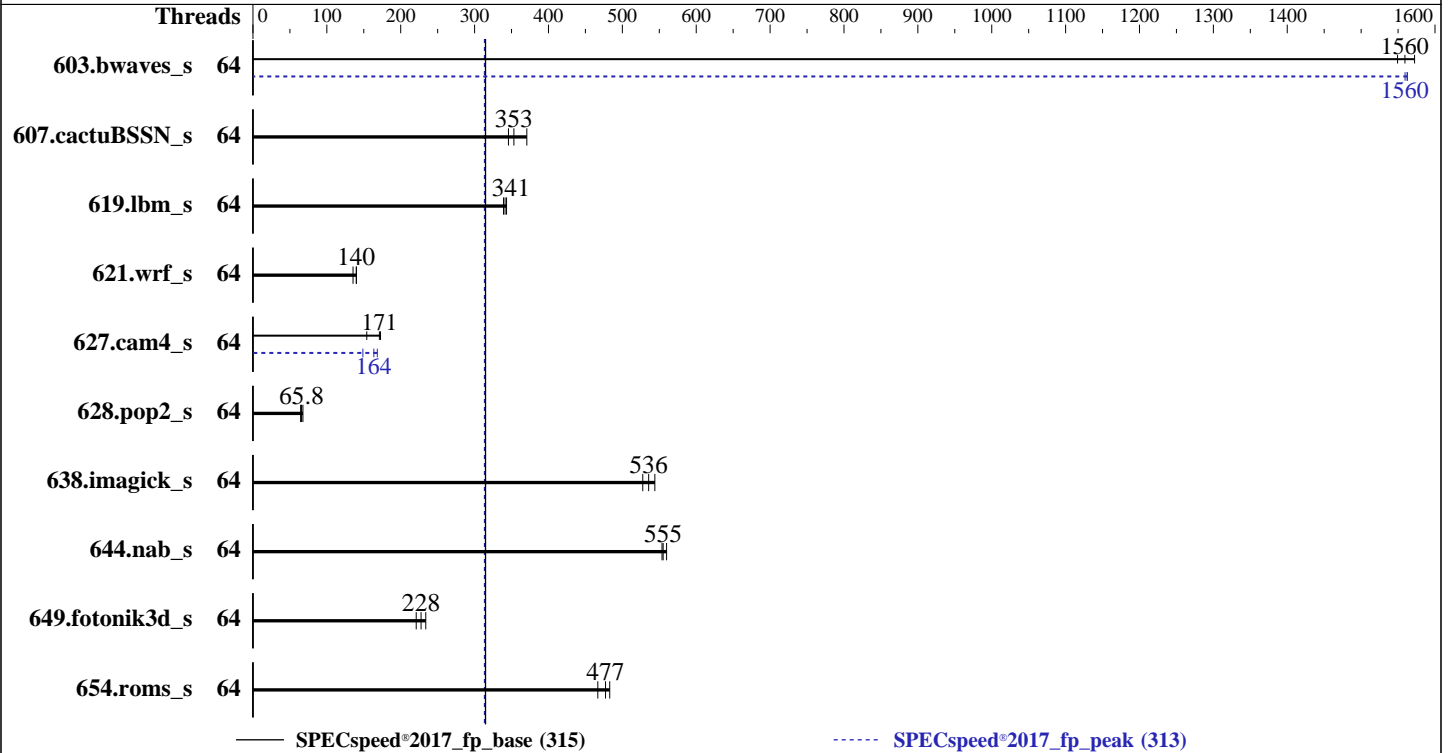

### Hardware

CPU Name: Intel Xeon Max 9462  
 Max MHz: 3500  
 Nominal: 2700  
 Enabled: 64 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 75 MB I+D on chip per chip  
 Other: None  
 Memory: 128 GB (8 x 16 GB HBM)  
 Storage: 6 TB SATA SSD  
 Other: CPU Cooling: DLC

### Software

OS: SUSE Linux Enterprise Server 15 SP5  
 5.14.21-150500.53-default  
 Compiler: C/C++: Version 2024.0.2 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2024.0.2 of Intel Fortran  
 Compiler for Linux;  
 Parallel: Yes  
 Firmware: Version 2.1.3 released Jan-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost  
 of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 315

PowerEdge C6620 (Intel Xeon Max 9462)

SPECSpeed®2017\_fp\_peak = 313

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2024  
Hardware Availability: May-2023  
Software Availability: Dec-2023

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	37.5	1570	38.1	1550	<b><u>37.8</u></b>	<b><u>1560</u></b>	64	37.8	1560	37.8	1560	<b><u>37.8</u></b>	<b><u>1560</u></b>
607.cactuBSSN_s	64	48.2	346	<b><u>47.2</u></b>	<b><u>353</u></b>	45.0	371	64	48.2	346	<b><u>47.2</u></b>	<b><u>353</u></b>	45.0	371
619.lbm_s	64	15.3	343	15.4	339	<b><u>15.3</u></b>	<b><u>341</u></b>	64	15.3	343	15.4	339	<b><u>15.3</u></b>	<b><u>341</u></b>
621.wrf_s	64	97.6	135	<b><u>94.6</u></b>	<b><u>140</u></b>	94.4	140	64	97.6	135	<b><u>94.6</u></b>	<b><u>140</u></b>	94.4	140
627.cam4_s	64	51.3	173	57.5	154	<b><u>51.8</u></b>	<b><u>171</u></b>	64	<b><u>54.2</u></b>	<b><u>164</u></b>	52.7	168	59.6	149
628.pop2_s	64	<b><u>181</u></b>	<b><u>65.8</u></b>	184	64.5	176	67.6	64	<b><u>181</u></b>	<b><u>65.8</u></b>	184	64.5	176	67.6
638.imagick_s	64	26.5	544	<b><u>26.9</u></b>	<b><u>536</u></b>	27.3	528	64	26.5	544	<b><u>26.9</u></b>	<b><u>536</u></b>	27.3	528
644.nab_s	64	<b><u>31.5</u></b>	<b><u>555</u></b>	31.6	554	31.2	560	64	<b><u>31.5</u></b>	<b><u>555</u></b>	31.6	554	31.2	560
649.fotonik3d_s	64	41.3	221	<b><u>40.1</u></b>	<b><u>228</u></b>	39.0	234	64	41.3	221	<b><u>40.1</u></b>	<b><u>228</u></b>	39.0	234
654.roms_s	64	33.7	467	32.6	483	<b><u>33.0</u></b>	<b><u>477</u></b>	64	33.7	467	32.6	483	<b><u>33.0</u></b>	<b><u>477</u></b>

SPECSpeed®2017\_fp\_base = 315

SPECSpeed®2017\_fp\_peak = 313

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.1.9-ic2024.0.2/lib/intel64:/home/cpu2017-1.1.9-ic2024.0.2/je5.0.1-64"  
MALLOCONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS settings:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 315

PowerEdge C6620 (Intel Xeon Max 9462)

SPECspeed®2017\_fp\_peak = 313

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2024  
Hardware Availability: May-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

ADDDC Setting : Disabled  
DIMM Self Healing on  
Uncorrectable Memory Error : Disabled

Logical Processor : Disabled  
Virtualization Technology : Disabled  
DCU Streamer Prefetcher : Disabled  
Optimizer Mode : Enabled

System Profile : Custom  
CPU Power Management : Maximum Performance  
CIE : Disabled  
C States : Autonomous  
Memory Patrol Scrub : Disabled  
Energy Efficiency Policy : Performance  
PCI ASPM L1 Link  
Power Management : Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2024.0.2/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Tue Apr 30 16:54:03 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

- 1. uname -a
  - 2. w
  - 3. Username
  - 4. ulimit -a
  - 5. sysinfo process ancestry
  - 6. /proc/cpuinfo
  - 7. lscpu
  - 8. numactl --hardware
  - 9. /proc/meminfo
  - 10. who -r
  - 11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
  - 12. Services, from systemctl list-unit-files
  - 13. Linux kernel boot-time arguments, from /proc/cmdline
  - 14. cpupower frequency-info
  - 15. sysctl
  - 16. /sys/kernel/mm/transparent\_hugepage
  - 17. /sys/kernel/mm/transparent\_hugepage/khugepaged
  - 18. OS release
  - 19. Disk information
  - 20. /sys/devices/virtual/dmi/id
  - 21. dmidecode
  - 22. BIOS
- 
- 1. uname -a  
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT\_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)  
x86\_64 x86\_64 x86\_64 GNU/Linux
- 
- 2. w  
16:54:03 up 3:42, 1 user, load average: 5.91, 5.71, 3.37  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 315

PowerEdge C6620 (Intel Xeon Max 9462)

SPECspeed®2017\_fp\_peak = 313

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2024  
Hardware Availability: May-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

```
root      tty1      -                13:12    3:41m  1.03s  0.00s  -bash
```

### 3. Username

```
From environment variable $USER:  root
```

### 4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 513497
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 513497
virtual memory           (kbytes, -v) unlimited
file locks               (-x) unlimited
```

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=64 --tune base,peak -o all --define
  drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2024.0.2-lin-sapphirerapids-speed-20231213.cfg --define cores=64 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.002/templogs/preenv.fpspeed.002.0.log --lognum 002.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2024.0.2
```

### 6. /proc/cpuinfo

```
model name      : Intel (R) Xeon (R) CPU Max 9462
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping      : 8
microcode     : 0x2c000351
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb
cpu cores     : 32
siblings      : 32
2 physical ids (chips)
64 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
physical id 1: apicids
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 315

PowerEdge C6620 (Intel Xeon Max 9462)

SPECspeed®2017\_fp\_peak = 313

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2024  
Hardware Availability: May-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,180,182,184,186,188,190

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Vendor ID:             GenuineIntel
Model name:            Intel (R) Xeon (R) CPU Max 9462
CPU family:            6
Model:                 143
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):             2
Stepping:              8
CPU max MHz:           3500.0000
CPU min MHz:           800.0000
BogoMIPS:              5400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                        cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              150 MiB (2 instances)
NUMA node(s):         2
NUMA node0 CPU(s):    0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
NUMA node1 CPU(s):    1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:     Not affected
Vulnerability Mds:      Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRBSB-eIBRS SW

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 315

PowerEdge C6620 (Intel Xeon Max 9462)

SPECspeed®2017\_fp\_peak = 313

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2024  
Hardware Availability: May-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

sequence  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	75M	150M	15	Unified	3	81920	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62
node 0 size: 63955 MB
node 0 free: 57146 MB
node 1 cpus: 1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55,57,59,61,63
node 1 size: 64448 MB
node 1 free: 63698 MB
node distances:
node 0 1
0: 10 23
1: 23 10

```

9. /proc/meminfo

MemTotal: 131486116 kB

10. who -r

run-level 3 Apr 30 13:11

11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)

Default Target	Status
multi-user	running

12. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewalld getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime	systemd-remount-fs
disabled	autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info gpm grub2-once haveged haveged-switch-root hwloc-dump-hwdata ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nvme-fc-autoconnect rpcbind rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 vncserver@
indirect	wickedd

13. Linux kernel boot-time arguments, from /proc/cmdline

BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=a980d06c-c41f-4c9d-8603-80e11879418a

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 315

PowerEdge C6620 (Intel Xeon Max 9462)

SPECspeed®2017\_fp\_peak = 313

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

## Platform Notes (Continued)

```
splash=silent
mitigations=auto
quiet
security=apparmor
```

```
-----
14. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 800 MHz and 3.50 GHz.
                  The governor "powersave" may decide which speed to use
                  within this range.

  boost state support:
    Supported: yes
    Active: yes
```

```
-----
15. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0
```

```
-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
```

```
-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

```
-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP5
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_fp\_base = 315

PowerEdge C6620 (Intel Xeon Max 9462)

SPECSpeed®2017\_fp\_peak = 313

CPU2017 License: 6573  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2024  
Hardware Availability: May-2023  
Software Availability: Dec-2023

## Platform Notes (Continued)

### 19. Disk information

SPEC is set to: /home/cpu2017-1.1.9-ic2024.0.2  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p3 xfs 5.9T 211G 5.7T 4% /

### 20. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.  
Product: PowerEdge C6620  
Product Family: PowerEdge  
Serial: SC662L1

### 21. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
8x 00CE 43 16 GB 3200

### 22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 2.1.3  
BIOS Date: 01/10/2024  
BIOS Revision: 2.1

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)  
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
=====

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)  
=====

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 315

PowerEdge C6620 (Intel Xeon Max 9462)

SPECspeed®2017\_fp\_peak = 313

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

## Compiler Version Notes (Continued)

-----

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
 Copyright (C) 1985-2023 Intel Corporation. All rights reserved.  
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.0.2 Build 20231213  
 Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

-----

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
 607.cactuBSSN\_s: -DSPEC\_LP64  
 619.lbm\_s: -DSPEC\_LP64  
 621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
 627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
 628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
 -assume byterecl  
 638.imagick\_s: -DSPEC\_LP64  
 644.nab\_s: -DSPEC\_LP64  
 649.fotonik3d\_s: -DSPEC\_LP64  
 654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math  
 -flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
 -DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
 -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 315

PowerEdge C6620 (Intel Xeon Max 9462)

SPECspeed®2017\_fp\_peak = 313

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 315

PowerEdge C6620 (Intel Xeon Max 9462)

SPECspeed®2017\_fp\_peak = 313

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -w -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.9.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.9.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 315

PowerEdge C6620 (Intel Xeon Max 9462)

SPECspeed®2017\_fp\_peak = 313

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2024

Hardware Availability: May-2023

Software Availability: Dec-2023

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-04-30 17:54:02-0400.  
Report generated on 2024-07-30 19:34:32 by CPU2017 PDF formatter v6716.  
Originally published on 2024-07-30.