



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 1140

### meta brain NF5280G8 (Intel Xeon 6780E)

SPECrate®2017\_fp\_peak = 1170

CPU2017 License: 3358


Test Date: Aug-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Oct-2024

Tested by: IEIT Systems Co., Ltd.

Software Availability: Jun-2024

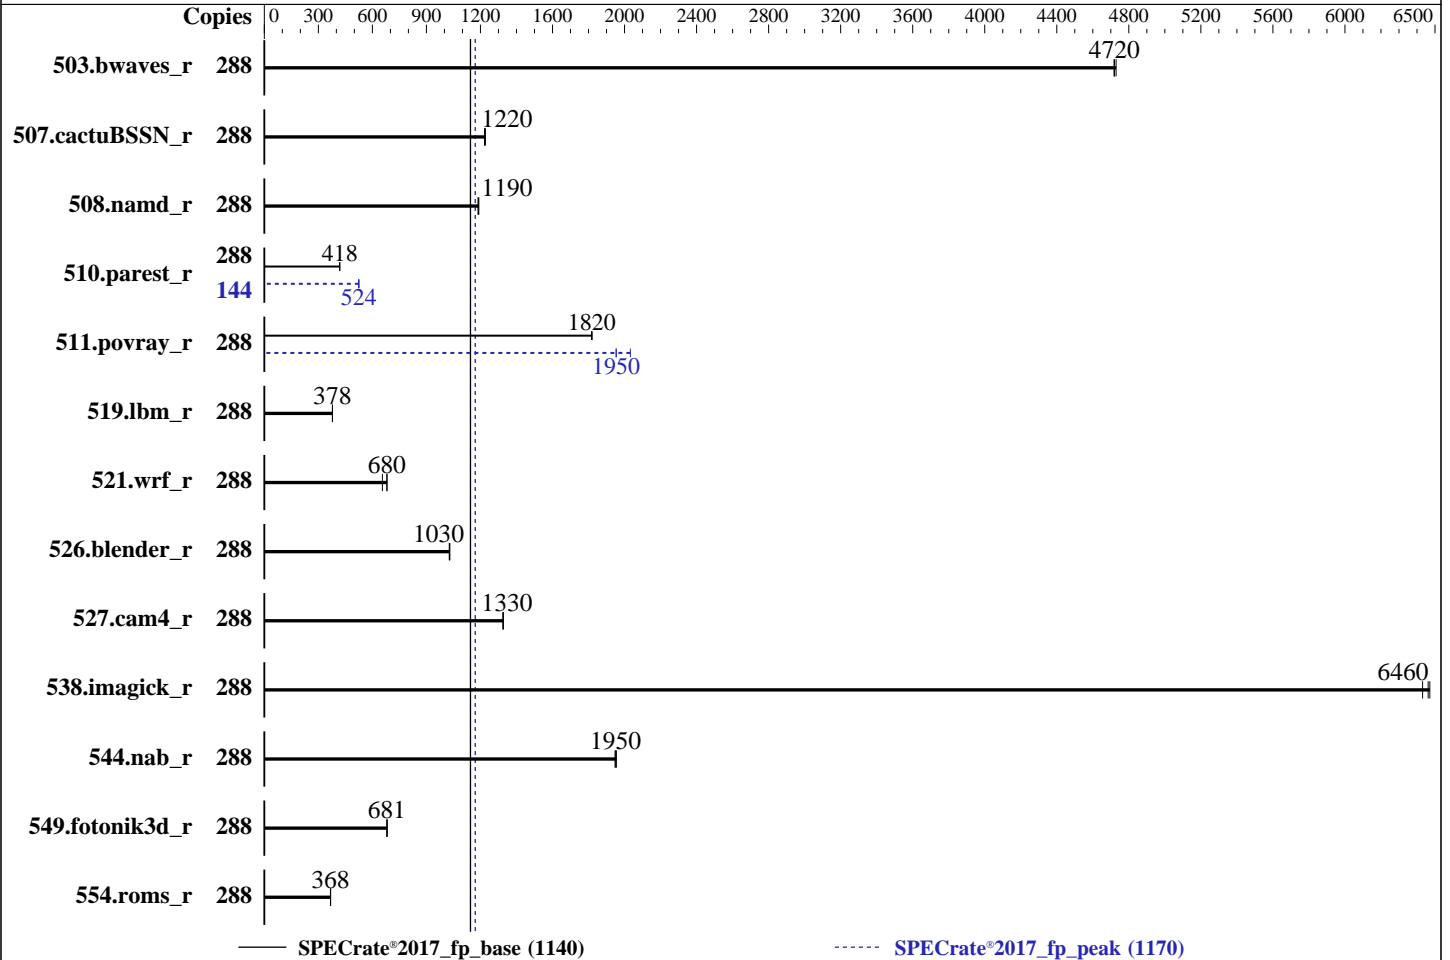

### Hardware

CPU Name: Intel Xeon 6780E  
 Max MHz: 3000  
 Nominal: 2200  
 Enabled: 288 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 4 MB I+D on chip per core  
 L3: 108 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 1.92 TB NVME SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6  
 6.4.0-150600.21-default  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler  
 for Linux;  
 Parallel: No  
 Firmware: Version 00.14.02 released Jul-2024  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost  
 of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 1140

meta brain NF5280G8 (Intel Xeon 6780E)

SPECrate®2017\_fp\_peak = 1170

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Aug-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	288	612	4720	611	4730	<b>612</b>	<b>4720</b>	288	612	4720	611	4730	<b>612</b>	<b>4720</b>
507.cactuBSSN_r	288	298	1220	<b>298</b>	<b>1220</b>	297	1230	288	298	1220	<b>298</b>	<b>1220</b>	297	1230
508.namd_r	288	230	1190	<b>230</b>	<b>1190</b>	230	1190	288	230	1190	<b>230</b>	<b>1190</b>	230	1190
510.parest_r	288	<b>1801</b>	<b>418</b>	1799	419	1802	418	144	718	525	<b>718</b>	<b>524</b>	719	524
511.povray_r	288	370	1820	<b>370</b>	<b>1820</b>	370	1820	288	344	1950	<b>344</b>	<b>1950</b>	331	2030
519.lbm_r	288	803	378	802	379	<b>803</b>	<b>378</b>	288	803	378	802	379	<b>803</b>	<b>378</b>
521.wrf_r	288	984	656	<b>948</b>	<b>680</b>	947	681	288	984	656	<b>948</b>	<b>680</b>	947	681
526.blender_r	288	426	1030	<b>427</b>	<b>1030</b>	427	1030	288	426	1030	<b>427</b>	<b>1030</b>	427	1030
527.cam4_r	288	380	1330	<b>380</b>	<b>1330</b>	380	1330	288	380	1330	<b>380</b>	<b>1330</b>	380	1330
538.imagick_r	288	111	6430	<b>111</b>	<b>6460</b>	111	6470	288	111	6430	<b>111</b>	<b>6460</b>	111	6470
544.nab_r	288	<b>248</b>	<b>1950</b>	248	1950	249	1950	288	<b>248</b>	<b>1950</b>	248	1950	249	1950
549.fotonik3d_r	288	1645	682	<b>1648</b>	<b>681</b>	1649	681	288	1645	682	<b>1648</b>	<b>681</b>	1649	681
554.roms_r	288	1243	368	1246	367	<b>1245</b>	<b>368</b>	288	1243	368	1246	367	<b>1245</b>	<b>368</b>

SPECrate®2017\_fp\_base = 1140

SPECrate®2017\_fp\_peak = 1170

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/CPU2017/lib/intel64:/home/CPU2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 1140

meta brain NF5280G8 (Intel Xeon 6780E)

SPECrate®2017\_fp\_peak = 1170

CPU2017 License: 3358

Test Date: Aug-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Oct-2024

Tested by: IEIT Systems Co., Ltd.

Software Availability: Jun-2024

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
ENERGY\_PERF\_BIAS\_CFG mode set to Performance  
Hardware Prefetch set to Disable  
VT Support set to Disable

Sysinfo program /home/CPU2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Thu Jun 13 16:15:57 2024

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux  
-----

-----  
2. w  
16:15:57 up 7:03, 1 user, load average: 156.05, 252.48, 272.22  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 1140

### meta brain NF5280G8 (Intel Xeon 6780E)

SPECrate®2017\_fp\_peak = 1170

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Aug-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Jun-2024

## Platform Notes (Continued)

```
root      tty1      -                09:12    5:58m  2.86s  0.08s  sh
reportable-ic2024.1-lin-sierraforest-rate-20240308.sh
```

### 3. Username

From environment variable \$USER: root

### 4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4124133
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4124133
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
sh reportable-ic2024.1-lin-sierraforest-rate-20240308.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 -c
ic2024.1-lin-sierraforest-rate-20231213.cfg --define smt-on --define peakfpcopies=144 --define
physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak -o all
fprate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=288 --configfile
ic2024.1-lin-sierraforest-rate-20231213.cfg --define smt-on --define peakfpcopies=144 --define
physicalfirst --define invoke_with_interleave --define drop_caches --reportable --tune base,peak
--output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
--note-preenv --logfile $SPEC/tmp/CPU2017.003/templogs/preenv.fprate.003.0.log --lognum 003.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) 6780E
vendor_id      : GenuineIntel
cpu family     : 6
model          : 175
stepping       : 3
microcode      : 0x130001a0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs bhi
cpu cores      : 144
siblings       : 144
2 physical ids (chips)
288 processors (hardware threads)
physical id 0: core ids 0-143
physical id 1: core ids 0-143
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 1140

### meta brain NF5280G8 (Intel Xeon 6780E)

SPECrate®2017\_fp\_peak = 1170

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Aug-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Jun-2024

## Platform Notes (Continued)

physical id 0: apicids

0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100, 102, 104, 106, 108, 110, 112, 114, 116, 118, 120, 122, 124, 126, 128, 130, 132, 134, 136, 138, 140, 142, 144, 146, 148, 150, 152, 154, 156, 158, 160, 162, 164, 166, 168, 170, 172, 174, 176, 178, 180, 182, 184, 186, 188, 190, 192, 194, 196, 198, 200, 202, 204, 206, 208, 210, 212, 214, 216, 218, 220, 222, 224, 226, 228, 230, 232, 234, 236, 238, 240, 242, 244, 246, 248, 250, 252, 254, 256, 258, 260, 262, 264, 266, 268, 270, 272, 274, 276, 278, 280, 282, 284, 286

physical id 1: apicids

512, 514, 516, 518, 520, 522, 524, 526, 528, 530, 532, 534, 536, 538, 540, 542, 544, 546, 548, 550, 552, 554, 556, 558, 560, 562, 564, 566, 568, 570, 572, 574, 576, 578, 580, 582, 584, 586, 588, 590, 592, 594, 596, 598, 600, 602, 604, 606, 608, 610, 612, 614, 616, 618, 620, 622, 624, 626, 628, 630, 632, 634, 636, 638, 640, 642, 644, 646, 648, 650, 652, 654, 656, 658, 660, 662, 664, 666, 668, 670, 672, 674, 676, 678, 680, 682, 684, 686, 688, 690, 692, 694, 696, 698, 700, 702, 704, 706, 708, 710, 712, 714, 716, 718, 720, 722, 724, 726, 728, 730, 732, 734, 736, 738, 740, 742, 744, 746, 748, 750, 752, 754, 756, 758, 760, 762, 764, 766, 768, 770, 772, 774, 776, 778, 780, 782, 784, 786, 788, 790, 792, 794, 796, 798

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 48 bits virtual
Byte Order:             Little Endian
CPU(s):                 288
On-line CPU(s) list:   0-287
Vendor ID:              GenuineIntel
BIOS Vendor ID:        Intel(R) Corporation
Model name:             Intel(R) Xeon(R) 6780E
BIOS Model name:       Intel(R) Xeon(R) 6780E CPU @ 2.2GHz
BIOS CPU family:       179
CPU family:             6
Model:                  175
Thread(s) per core:    1
Core(s) per socket:    144
Socket(s):              2
Stepping:               3
CPU(s) scaling MHz:    27%
CPU max MHz:            3000.0000
CPU min MHz:            800.0000
BogoMIPS:               4400.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                        pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                        pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                        nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                        pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                        pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                        xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                        cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                        ibrs_enhanced tpr_shadow flexpriority ept vpid ept_ad fsgsbase
                        tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap
                        clflushopt clwb intel_pt sha_ni xsaveopt xsavec xgetbv1 xsaves
                        cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
                        user_shstk avx_vnni lam wbnoinvd dtherm ida arat pln pts hwp
                        hwp_act_window hwp_epp hwp_pkg_req vnmi umip pku ospke waitpkg gfni
                        vaes vpclmulqdq tme rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize pconfig arch_lbr ibt flush_lld
                        arch_capabilities

Virtualization:         VT-x
Lld cache:              9 MiB (288 instances)

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 1140

meta brain NF5280G8 (Intel Xeon 6780E)

SPECrate®2017\_fp\_peak = 1170

CPU2017 License: 3358

Test Date: Aug-2024

Test Sponsor: IEIT Systems Co., Ltd.

Hardware Availability: Oct-2024

Tested by: IEIT Systems Co., Ltd.

Software Availability: Jun-2024

### Platform Notes (Continued)

```

L1i cache:                18 MiB (288 instances)
L2 cache:                 288 MiB (72 instances)
L3 cache:                 216 MiB (2 instances)
NUMA node(s):             2
NUMA node0 CPU(s):       0-143
NUMA node1 CPU(s):       144-287
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed:  Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling;
                          PBRSE-eIBRS Not affected; BHI BHI_DIS_S
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	9M	8	Data	1	64	1	64
L1i	64K	18M	8	Instruction	1	128	1	64
L2	4M	288M	16	Unified	2	4096	1	64
L3	108M	216M	12	Unified	3	147456	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0-143
node 0 size: 515451 MB
node 0 free: 456907 MB
node 1 cpus: 144-287
node 1 size: 515608 MB
node 1 free: 461151 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

9. /proc/meminfo

MemTotal: 1055805224 kB

10. who -r

run-level 3 Jun 13 09:12

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

```

Default Target Status
multi-user      running

```

12. Services, from systemctl list-unit-files

```

STATE UNIT FILES

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 1140

meta brain NF5280G8 (Intel Xeon 6780E)

SPECrate®2017\_fp\_peak = 1170

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Aug-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

### Platform Notes (Continued)

```

enabled      YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager firewallld getty@
             irqbalance issue-generator kbdsettings kdump kdump-early kdump-notify klog lvm2-monitor
             nscd nvme-fc-connections nvme-fc-autoconnect postfix-purge-kernels rollback rsyslog
             smartd sshd systemd-pstore wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny

enabled-runtime  systemd-remount-fs
disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
             chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info fsidd
             gpm grub2-once haveged ipmi ipmievdev issue-add-ssh-keys kexec-load lunmask man-db-create
             multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd serial-getty@ smartd-generate_opts
             snmpd snmptrapd systemd-boot-check-no-failures systemd-confext systemd-network-generator
             systemd-sysext systemd-time-wait-sync systemd-timesyncd udisks2 vncserver@

indirect       systemd-userdbd wickedd

```

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=18377317-737e-4218-af3f-1dfefc7f1bec
splash=silent
mitigations=auto
quiet
security=apparmor
crashkernel=371M,high
crashkernel=72M,low

```

-----  
14. cpupower frequency-info

```

analyzing CPU 27:
  current policy: frequency should be within 800 MHz and 3.00 GHz.
                   The governor "powersave" may decide which speed to use
                   within this range.

boost state support:
  Supported: yes
  Active: yes

```

-----  
15. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space      2
vm.compaction_proactiveness     20
vm.dirty_background_bytes       0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

-----  
16. /sys/kernel/mm/transparent\_hugepage

```

defrag      always defer defer+madvice [madvice] never
enabled     [always] madvice never

```

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 1140

meta brain NF5280G8 (Intel Xeon 6780E)

SPECrate®2017\_fp\_peak = 1170

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Aug-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Platform Notes (Continued)

hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
17. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000  
-----

-----  
18. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6  
-----

-----  
19. Disk information  
SPEC is set to: /home/CPU2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/nvme0n1p2 xfs 892G 137G 755G 16% /  
-----

-----  
20. /sys/devices/virtual/dmi/id  
Vendor: IEIT SYSTEMS  
Product: NF5180-M8-A0-R0-00  
Product Family: Not specified  
Serial: 000000000  
-----

-----  
21. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Samsung M321R8GA0PB2-CCPEC 64 GB 2 rank 6400  
-----

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 00.14.02  
BIOS Date: 07/18/2024  
BIOS Revision: 5.35  
-----

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
-----

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**

**SPECrate®2017\_fp\_base = 1140**

**meta brain NF5280G8 (Intel Xeon 6780E)**

**SPECrate®2017\_fp\_peak = 1170**

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Aug-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Jun-2024

## Compiler Version Notes (Continued)

C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 1140

meta brain NF5280G8 (Intel Xeon 6780E)

SPECrate®2017\_fp\_peak = 1170

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Aug-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 1140

meta brain NF5280G8 (Intel Xeon 6780E)

SPECrate®2017\_fp\_peak = 1170

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Aug-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -nostandard-realloc-lhs -align array32byte -auto
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsierraforest -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

IEIT Systems Co., Ltd.

SPECrate®2017\_fp\_base = 1140

meta brain NF5280G8 (Intel Xeon 6780E)

SPECrate®2017\_fp\_peak = 1170

CPU2017 License: 3358

Test Sponsor: IEIT Systems Co., Ltd.

Tested by: IEIT Systems Co., Ltd.

Test Date: Aug-2024

Hardware Availability: Oct-2024

Software Availability: Jun-2024

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -Ofast -ffast-math -flto -mfpmath=sse -funroll-loops -gopt-mem-layout-trans=4 -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

549.fotonik3d\_r: basepeak = yes

554.roms\_r: basepeak = yes

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

511.povray\_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1) -fprofile-use=default.profdata(pass 2) -xCORE-AVX2 -flto -Ofast -ffast-math -mfpmath=sse -funroll-loops -gopt-mem-layout-trans=4 -Wno-implicit-int -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**IEIT Systems Co., Ltd.**

SPECrate®2017\_fp\_base = 1140

meta brain NF5280G8 (Intel Xeon 6780E)

SPECrate®2017\_fp\_peak = 1170

**CPU2017 License:** 3358

**Test Sponsor:** IEIT Systems Co., Ltd.

**Tested by:** IEIT Systems Co., Ltd.

**Test Date:** Aug-2024

**Hardware Availability:** Oct-2024

**Software Availability:** Jun-2024

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/IEIT-Platform-Settings-intel-V1.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-06-13 16:15:55-0400.

Report generated on 2024-08-29 10:50:01 by CPU2017 PDF formatter v6716.

Originally published on 2024-08-27.