



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 838

H3C UniServer R3900 G7 (Intel Xeon 6960P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066


Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

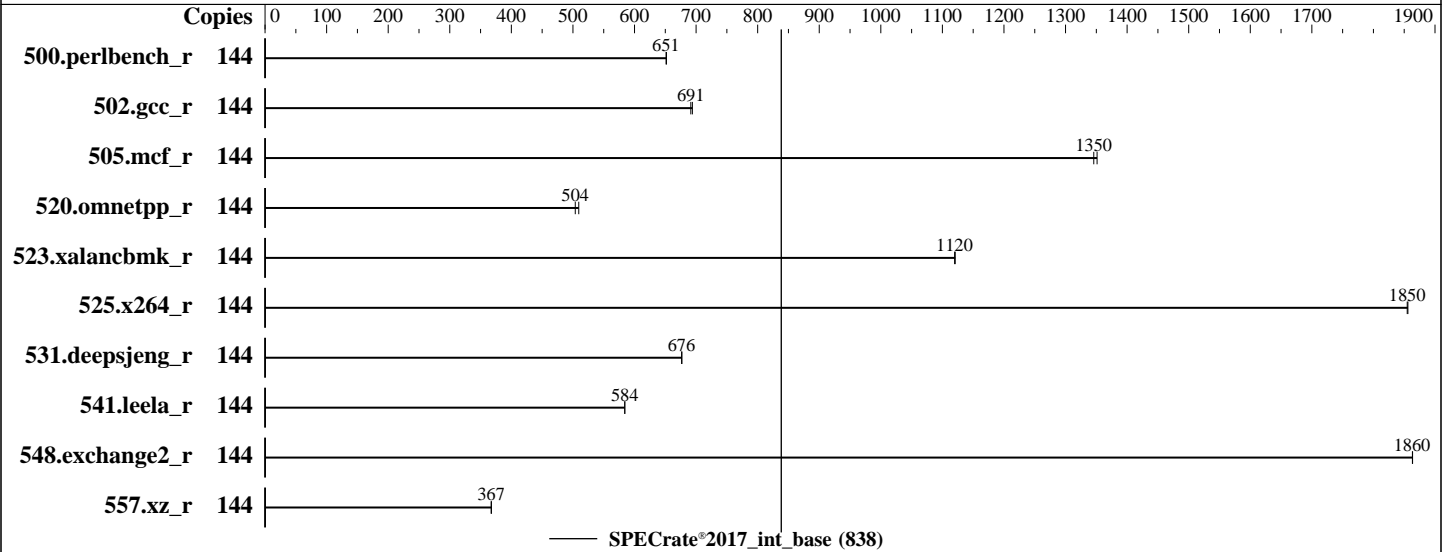

## Hardware

CPU Name: Intel Xeon 6960P  
 Max MHz: 3900  
 Nominal: 2700  
 Enabled: 72 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 432 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (12 x 64 GB 4Rx8 PC5-12800B-R, running at 8800)  
 Storage: 1 x 3.84 TB NVME SSD  
 Other: CPU Cooling: Air

## Software

OS: Red Hat Enterprise Linux 9.4 (Plow)  
 5.14.0-427.13.1.el9\_4.x86\_64  
 Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 7.10.01P91 released Sep-2024 BIOS  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 838

H3C UniServer R3900 G7 (Intel Xeon 6960P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	144	<b>352</b>	<b>651</b>	352	652									
502.gcc_r	144	<b>295</b>	<b>691</b>	294	694									
505.mcf_r	144	172	1350	<b>173</b>	<b>1350</b>									
520.omnetpp_r	144	<b>375</b>	<b>504</b>	371	509									
523.xalancbmk_r	144	136	1120	<b>136</b>	<b>1120</b>									
525.x264_r	144	136	1860	<b>136</b>	<b>1850</b>									
531.deepsjeng_r	144	244	677	<b>244</b>	<b>676</b>									
541.leela_r	144	408	584	<b>408</b>	<b>584</b>									
548.exchange2_r	144	<b>202</b>	<b>1860</b>	202	1860									
557.xz_r	144	423	368	<b>424</b>	<b>367</b>									

SPECrate®2017\_int\_base = 838

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 838

H3C UniServer R3900 G7 (Intel Xeon 6960P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2024

Hardware Availability: Oct-2024

Software Availability: Apr-2024

## Platform Notes

### BIOS Settings:

LLC dead line alloc = Disabled  
Power Performance Tuning = BIOS Controls EPB  
ENERGY\_PERF\_BIAS\_CFG mode = Performance

Sysinfo program /home/speccpu/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Mon Oct 7 19:09:43 2024

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.e19\_4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
2024 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
19:09:44 up 5 min, 2 users, load average: 0.03, 0.05, 0.02
USER      TTY      LOGIN@   IDLE   JCPU   PCPU   WHAT
root     tty1      19:05    2:18   0.00s  0.00s  -bash
root     pts/0    19:07   24.00s  0.78s  0.00s  sh intrate.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 838

H3C UniServer R3900 G7 (Intel Xeon 6960P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Platform Notes (Continued)

```

scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 3092056
max locked memory       (kbytes, -l) 8192
max memory size         (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes      (-u) 3092056
virtual memory          (kbytes, -v) unlimited
file locks               (-x) unlimited

```

### 5. sysinfo process ancestry

```

/usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
sh intrate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 -c
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=144 --define physicalfirst
--define invoke_with_interleave --define drop_caches --reportable --tune base -o all intrate -n 2
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=144 --configfile
ic2024.1-lin-sierraforest-rate-20240308.cfg --define smt-on --define cores=144 --define physicalfirst
--define invoke_with_interleave --define drop_caches --reportable --tune base --output_format all
--iterations 2 --nopower --runmode rate --tune base --size refrate intrate --nopreenv --note-preenv
--logfile $SPEC/tmp/CPU2017.074/templogs/preenv.intrate.074.0.log --lognum 074.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/speccpu

```

### 6. /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) 6960P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 173
stepping       : 1
microcode      : 0x810002e0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 72
siblings       : 144
1 physical ids (chips)
144 processors (hardware threads)
physical id 0: core ids 0-23,64-87,128-151
physical id 0: apicids 0-47,128-175,256-303

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:         Little Endian

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 838

H3C UniServer R3900 G7 (Intel Xeon 6960P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Date: Oct-2024

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Oct-2024

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Apr-2024

## Platform Notes (Continued)

```

CPU(s): 144
On-line CPU(s) list: 0-143
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) 6960P
BIOS Model name: Intel(R) Xeon(R) 6960P
CPU family: 6
Model: 173
Thread(s) per core: 2
Core(s) per socket: 72
Socket(s): 1
Stepping: 1
CPU max MHz: 3900.0000
CPU min MHz: 800.0000
BogoMIPS: 5400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb
rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl
xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq
dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2
cdp_l3 cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
flexpriority ept vpid ept_ad fsrsgbase tsc_adjust bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
hwp hwp_act_window hwp_epp hwp_pkg_req hfi vnni avx512vbmi umip pku
ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni
avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote
movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr ibt amx_bf16 avx512_fp16 amx_tile amx_int8 flush_l1d
arch_capabilities

Virtualization: VT-x
L1d cache: 3.4 MiB (72 instances)
L1i cache: 4.5 MiB (72 instances)
L2 cache: 144 MiB (72 instances)
L3 cache: 432 MiB (1 instance)
NUMA node(s): 3
NUMA node0 CPU(s): 0-23,72-95
NUMA node1 CPU(s): 24-47,96-119
NUMA node2 CPU(s): 48-71,120-143
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, RSB filling,
PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE LEVEL SETS PHY-LINE COHERENCY-SIZE

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 838

H3C UniServer R3900 G7 (Intel Xeon 6960P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2024

Hardware Availability: Oct-2024

Software Availability: Apr-2024

## Platform Notes (Continued)

L1d	48K	3.4M	12 Data	1	64	1	64
L1i	64K	4.5M	16 Instruction	1	64	1	64
L2	2M	144M	16 Unified	2	2048	1	64
L3	432M	432M	16 Unified	3	442368	1	64

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 3 nodes (0-2)
node 0 cpus: 0-23,72-95
node 0 size: 257041 MB
node 0 free: 256137 MB
node 1 cpus: 24-47,96-119
node 1 size: 257994 MB
node 1 free: 257255 MB
node 2 cpus: 48-71,120-143
node 2 size: 258020 MB
node 2 free: 257329 MB
node distances:
node  0  1  2
  0:  10  12  12
  1:  12  10  12
  2:  12  12  10

```

### 9. /proc/meminfo

MemTotal: 791610144 kB

### 10. who -r

run-level 3 Oct 7 19:04

### 11. Systemd service manager version: systemd 252 (252-32.e19\_4)

```

Default Target Status
multi-user      running

```

### 12. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd bluetooth
chronyd crond dbus-broker firewalld getty@ insights-client-boot irqbalance iscsi-onboot
iscsi-starter kdump libstoragemgmt low-memory-monitor lvm2-monitor mcelog mdmonitor
microcode multipathd nis-domainname nvme-fc-boot-connections rhsmcertd rsyslog rtkit-daemon
selinux-autorelabel-mark smartd sshd sssd systemd-boot-update systemd-network-generator
tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled arp-ethers blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty cpupower
debug-shell dnf-system-upgrade iprddump iprinit iprupdate ipsec iscsi-init iscsid iscsiui
kpatch kvm_stat ledmon man-db-restart-cache-update nftables nvme-fc-autoconnect pesign psacct
rdisc rhcd rhsm rhsm-facts rpmd-b-rebuild selinux-check-proper-disable serial-getty@
sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect iscsi sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

```

### 13. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-427.13.1.e19_4.x86_64
root=/dev/mapper/rhel-root

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 838

H3C UniServer R3900 G7 (Intel Xeon 6960P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2024

Hardware Availability: Oct-2024

Software Availability: Apr-2024

## Platform Notes (Continued)

```

ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

```

```

-----
14. cpupower frequency-info
analyzing CPU 20:
  current policy: frequency should be within 800 MHz and 3.90 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.
  boost state support:
    Supported: yes
    Active: yes

```

```

-----
15. tuned-adm active
  Current active profile: throughput-performance

```

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  10
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force

```

```

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 838

H3C UniServer R3900 G7 (Intel Xeon 6960P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2024

Hardware Availability: Oct-2024

Software Availability: Apr-2024

## Platform Notes (Continued)

### 19. OS release

```
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.4 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.4 (Plow)
system-release  Red Hat Enterprise Linux release 9.4 (Plow)
```

### 20. Disk information

```
SPEC is set to: /home/speccpu
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   3.5T  343G  3.1T  10% /home
```

### 21. /sys/devices/virtual/dmi/id

```
Vendor:      New H3C Technologies Co., Ltd.
Product:     H3C UniServer R3900 G7
Serial:      210235A526H249000010
```

### 22. dmidecode

Additional information from dmidecode 3.5 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
12x Hynix HMC98BDJHA381N 64 GB 4 rank 12800, configured at 8800

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

```
BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     7.10.01P91
BIOS Date:        09/25/2024
BIOS Revision:    5.35
Firmware Revision: 1.16
```

## Compiler Version Notes

```
====
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)
-----
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
====
C++    | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)
-----
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
====
Fortran | 548.exchange2_r(base)
-----
```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 838

H3C UniServer R3900 G7 (Intel Xeon 6960P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2024

Hardware Availability: Oct-2024

Software Availability: Apr-2024

## Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Base Optimization Flags

C benchmarks:

```

-w -std=c11 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

```

C++ benchmarks:

```

-w -std=c++14 -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

```

Fortran benchmarks:

```

-w -m64 -Wl,-z,muldefs -xsierraforest -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 838

H3C UniServer R3900 G7 (Intel Xeon 6960P)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Oct-2024

Hardware Availability: Oct-2024

Software Availability: Apr-2024

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.0-SPR-RevE.html](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.0-SPR-RevE.xml](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.0-SPR-RevE.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2024-10-07 07:09:43-0400.

Report generated on 2024-10-23 13:33:06 by CPU2017 PDF formatter v6716.

Originally published on 2024-10-23.