



# SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

SPECmpiM\_peak2007 = 39.8

SPECmpiM\_base2007 = 39.8

MPI2007 license: 28


Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Oct-2020

Hardware Availability: Oct-2020

Software Availability: Oct-2020

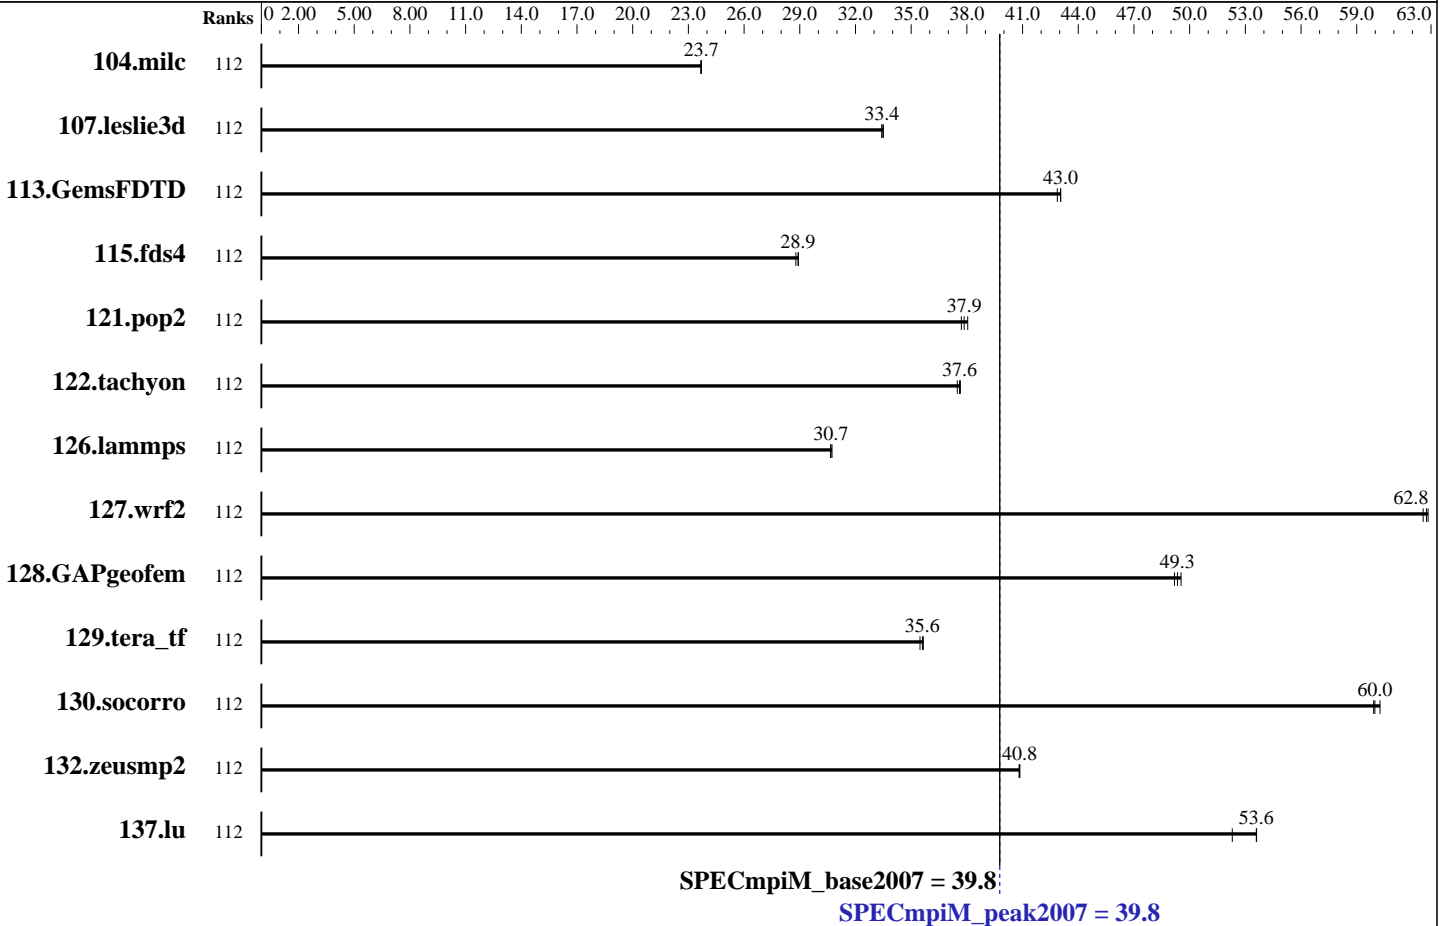

## Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
104.milc	112	<u>66.1</u>	<u>23.7</u>	66.0	23.7	66.1	23.7	112	<u>66.1</u>	<u>23.7</u>	66.0	23.7	66.1	23.7		
107.leslie3d	112	156	33.4	156	33.5	<u>156</u>	<u>33.4</u>	112	156	33.4	156	33.5	<u>156</u>	<u>33.4</u>		
113.GemsFDTD	112	<u>147</u>	<u>43.0</u>	147	42.9	147	43.1	112	<u>147</u>	<u>43.0</u>	147	42.9	147	43.1		
115.fds4	112	<u>67.5</u>	<u>28.9</u>	67.5	28.9	67.8	28.8	112	<u>67.5</u>	<u>28.9</u>	67.5	28.9	67.8	28.8		
121.pop2	112	109	37.7	<u>109</u>	<u>37.9</u>	108	38.0	112	109	37.7	<u>109</u>	<u>37.9</u>	108	38.0		
122.tachyon	112	74.3	37.6	74.6	37.5	<u>74.4</u>	<u>37.6</u>	112	74.3	37.6	74.6	37.5	<u>74.4</u>	<u>37.6</u>		
126.lammps	112	94.8	30.7	<u>95.0</u>	<u>30.7</u>	95.1	30.7	112	94.8	30.7	<u>95.0</u>	<u>30.7</u>	95.1	30.7		
127.wrf2	112	<u>124</u>	<u>62.8</u>	125	62.6	124	62.8	112	<u>124</u>	<u>62.8</u>	125	62.6	124	62.8		
128.GAPgeofem	112	42.0	49.2	41.7	49.5	<u>41.8</u>	<u>49.3</u>	112	42.0	49.2	41.7	49.5	<u>41.8</u>	<u>49.3</u>		
129.tera_tf	112	77.6	35.7	<u>77.7</u>	<u>35.6</u>	78.0	35.5	112	77.6	35.7	<u>77.7</u>	<u>35.6</u>	78.0	35.5		

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

SPECmpiM\_peak2007 = 39.8

SPECmpiM\_base2007 = 39.8

MPI2007 license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Oct-2020

Hardware Availability: Oct-2020

Software Availability: Oct-2020

### Results Table (Continued)

Benchmark	Base							Peak						
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	112	63.7	59.9	<b>63.6</b>	<b>60.0</b>	63.3	60.3	112	63.7	59.9	<b>63.6</b>	<b>60.0</b>	63.3	60.3
132.zeusmp2	112	76.0	40.8	76.0	40.9	<b>76.0</b>	<b>40.8</b>	112	76.0	40.8	76.0	40.9	<b>76.0</b>	<b>40.8</b>
137.lu	112	68.6	53.6	70.3	52.3	<b>68.6</b>	<b>53.6</b>	112	68.6	53.6	70.3	52.3	<b>68.6</b>	<b>53.6</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

#### Hardware Summary

Type of System: Homogeneous  
 Compute Node: ThinkSystem SR860 V2  
 Interconnect: Nvidia Mellanox ConnectX-6 HDR Infiniband  
 File Server Node: NFS  
 Total Compute Nodes: 1  
 Total Chips: 4  
 Total Cores: 112  
 Total Threads: 112  
 Total Memory: 1536 GB  
 Base Ranks Run: 112  
 Minimum Peak Ranks: 112  
 Maximum Peak Ranks: 112

#### Software Summary

C Compiler: Intel Parallel Studio C Compiler 20 Update 2 for Linux  
 Version 19.1.2.254 Build 20200623  
 C++ Compiler: Intel Parallel Studio C++ Compiler 20 Update 2 for Linux  
 Version 19.1.2.254 Build 20200623  
 Fortran Compiler: Intel Parallel Studio Fortran Compiler 20 Update 2 for Linux  
 Version 19.1.2.254 Build 20200623  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 MPI Library: Intel Parallel Studio MPI Library for Linux\* OS  
 Version 2020 Update 2 Build 20200624  
 Other MPI Info: None  
 Pre-processors: No  
 Other Software: None

### Node Description: ThinkSystem SR860 V2

#### Hardware

Number of nodes: 1  
 Uses of the node: compute  
 Vendor: Lenovo Global Technology  
 Model: ThinkSystem SR860 V2  
 CPU Name: Intel Xeon Platinum 8380H  
 CPU(s) orderable: 2,4 chips  
 Chips enabled: 4  
 Cores enabled: 112  
 Cores per chip: 28  
 Threads per core: 1  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.3 GHz  
 CPU MHz: 2900  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core  
 L3 Cache: 39424 KB I+D on chip per chip  
 Other Cache: None  
 Memory: 1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R)  
 Disk Subsystem: 1 x 1 TB SATA 2.5" SSD  
 Other Hardware: N/A  
 Adapter: Nvidia Nvidia Mellanox ConnectX-6 HDR Infiniband  
 Number of Adapters: 1

#### Software

Adapter: Nvidia Nvidia Mellanox ConnectX-6 HDR Infiniband  
 Adapter Driver: 5.1-0.6.6  
 Adapter Firmware: 20.25.2006  
 Operating System: SUSE Linux Enterprise Server 15 SP2  
 5.3.18-22-default  
 Local File System: xfs  
 Shared File System: None  
 System State: Multi-user, run level 3  
 Other Software: None

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECmpim\_peak2007 = 39.8

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

SPECmpim\_base2007 = 39.8

MPI2007 license: 28

Test date: Oct-2020

Test sponsor: Lenovo Global Technology

Hardware Availability: Oct-2020

Tested by: Lenovo Global Technology

Software Availability: Oct-2020

### Node Description: ThinkSystem SR860 V2

Slot Type:	PCI-Express 3.0 x16
Data Rate:	200 Gb/s
Ports Used:	1
Interconnect Type:	Nvidia Mellanox ConnectX-6 HDR Infiniband

### Node Description: NFS

#### Hardware

#### Software

Number of nodes:	1
Uses of the node:	Fileserver
Vendor:	Lenovo Global Technology
Model:	ThinkSystem SR860 V2
CPU Name:	Intel Xeon Platinum 8380H
CPU(s) orderable:	2,4 chips
Chips enabled:	4
Cores enabled:	112
Cores per chip:	28
Threads per core:	1
CPU Characteristics:	Intel Turbo Boost Technology up to 4.3 GHz
CPU MHz:	2900
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	39424 KB I+D on chip per chip
Other Cache:	None
Memory:	1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R)
Disk Subsystem:	1 x 1 TB SATA 2.5" SSD
Other Hardware:	None
Adapter:	Nvidia Mellanox ConnectX-6 Series
Number of Adapters:	1
Slot Type:	PCI-Express 3.0 x16
Data Rate:	200 Gb/s
Ports Used:	1
Interconnect Type:	Nvidia Mellanox ConnectX-6

Adapter:	Nvidia Mellanox ConnectX-6 Series
Adapter Driver:	5.1-0.6.6
Adapter Firmware:	20.25.2006
Operating System:	SUSE Linux Enterprise Server 15 SP2
Local File System:	None
Shared File System:	NFS
System State:	Multi-User, run level 3
Other Software:	None

### Interconnect Description: Nvidia Mellanox ConnectX-6 HDR Infiniband

#### Hardware

#### Software

Vendor:	Nvidia
Model:	Nvidia Mellanox ConnectX-6 HDR Infiniband
Switch Model:	Nvidia Mellanox QM8700
Number of Switches:	1
Number of Ports:	40
Data Rate:	200 Gb/s
Firmware:	3.9.0606
Topology:	Mesh

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

SPECmpiM\_peak2007 = 39.8

SPECmpiM\_base2007 = 39.8

MPI2007 license: 28

Test sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test date: Oct-2020

Hardware Availability: Oct-2020

Software Availability: Oct-2020

## Interconnect Description: Nvidia Mellanox ConnectX-6 HDR Infiniband

Primary Use: MPI and I/O traffic

### Submit Notes

The config file option 'submit' was used.

### General Notes

MPI startup command:  
mpiexec command was used to start MPI jobs.

RAM configuration:  
Compute nodes have 2 x 32 GB RDIMM on each memory channel.

BIOS settings:  
Operating Mode : Maximum Performance Mode  
Intel Hyper-Threading Technology (SMT): Disabled  
SNC (Sub-NUMA Cluster): Enable

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Base Compiler Invocation

C benchmarks:  
mpiicc

C++ benchmarks:  
126.lammps: mpiicpc

Fortran benchmarks:  
mpiifort

Benchmarks using both Fortran and C:  
mpiicc mpiifort



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECmpiM\_peak2007 = 39.8

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

SPECmpiM\_base2007 = 39.8

MPI2007 license: 28

Test date: Oct-2020

Test sponsor: Lenovo Global Technology

Hardware Availability: Oct-2020

Tested by: Lenovo Global Technology

Software Availability: Oct-2020

## Base Portability Flags

121.pop2: -DSPEC\_MPI\_CASE\_FLAG  
126.lammps: -DMPICH\_IGNORE\_CXX\_SEEK  
127.wrf2: -DSPEC\_MPI\_CASE\_FLAG -DSPEC\_MPI\_LINUX  
130.socorro: -assume nostd\_intent\_in

## Base Optimization Flags

C benchmarks:  
-O3 -ipo -xCORE-AVX512 -no-prec-div

C++ benchmarks:  
126.lammps: -O3 -ipo -xCORE-AVX512 -no-prec-div

Fortran benchmarks:  
-O3 -ipo -xCORE-AVX512 -no-prec-div

Benchmarks using both Fortran and C:  
-O3 -ipo -xCORE-AVX512 -no-prec-div

## Peak Optimization Flags

C benchmarks:  
104.milc: basepeak = yes  
122.tachyon: basepeak = yes

C++ benchmarks:  
126.lammps: basepeak = yes

Fortran benchmarks:  
107.leslie3d: basepeak = yes  
113.GemsFDTD: basepeak = yes  
129.tera\_tf: basepeak = yes  
137.lu: basepeak = yes

Benchmarks using both Fortran and C:  
115.fds4: basepeak = yes

Continued on next page



# SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR860 V2  
(Intel Xeon Platinum 8380H CPU, 2.90 GHz)

**SPECmpiM\_peak2007 = 39.8**

**SPECmpiM\_base2007 = 39.8**

**MPI2007 license:** 28

**Test sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test date:** Oct-2020

**Hardware Availability:** Oct-2020

**Software Availability:** Oct-2020

## Peak Optimization Flags (Continued)

121.pop2: basepeak = yes

127.wrf2: basepeak = yes

128.GAPgeofem: basepeak = yes

130.socorro: basepeak = yes

132.zeusmp2: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel121\\_flags.20201007.html](http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20201007.html)

[http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM\\_Platform\\_Flags.html](http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM_Platform_Flags.html)

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/mpi2007/flags/EM64T\\_Intel121\\_flags.20201007.xml](http://www.spec.org/mpi2007/flags/EM64T_Intel121_flags.20201007.xml)

[http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM\\_Platform\\_Flags.xml](http://www.spec.org/mpi2007/flags/Lenovo-SPECmpiM_Platform_Flags.xml)

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC MPI2007 v2.0.1.

Report generated on Wed Nov 4 16:31:40 2020 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 4 November 2020.