




CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Dell
PowerEdge SC1425 (3.6GHz, Intel Xeon)

SPECfp_rate2000 = --
SPECfp_rate_base2000 = 33.2

SPEC license #: 55 | Tested by: Dell | Test date: Feb-2005 | Hardware Avail: Feb-2005 | Software Avail: Jan-2005

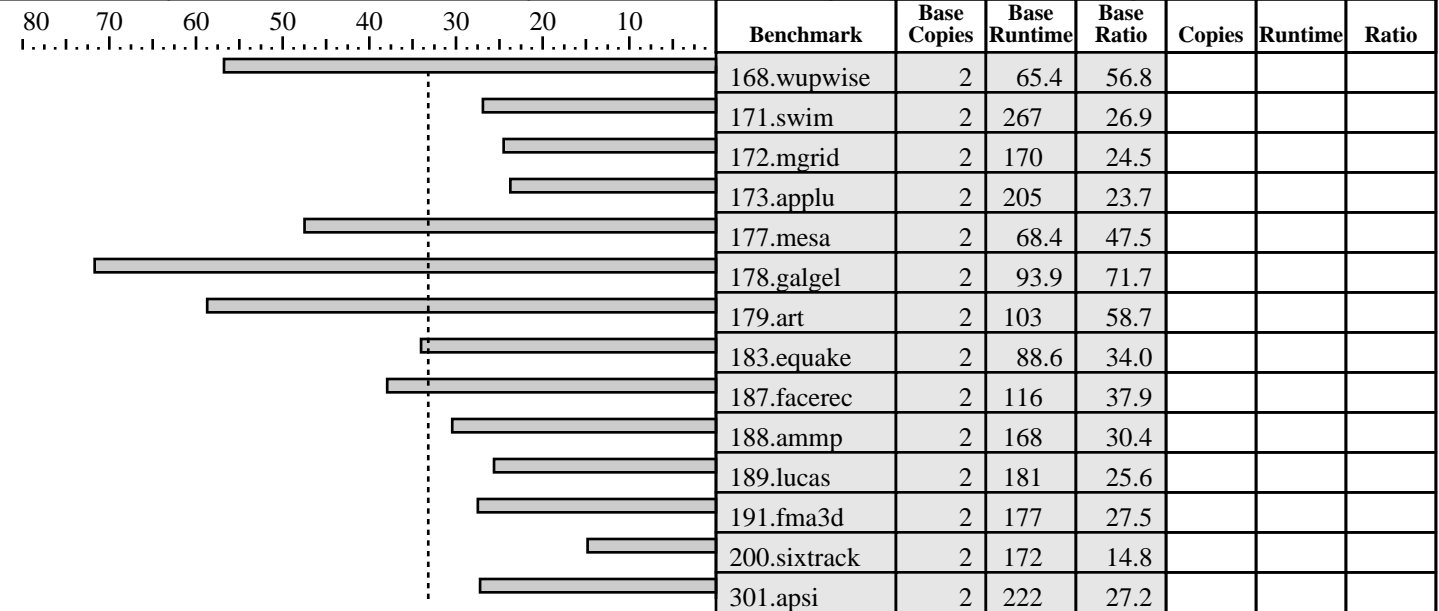

Hardware

CPU: Intel Xeon (3.6GHz, 2MB L2, 800MHz bus)
 CPU MHz: 3600
 FPU: Integrated
 CPU(s) enabled: 2 cores, 2 chips, 1 core/chip (Hyper-Threading Technology disabled)
 CPU(s) orderable: 1,2
 Parallel: No
 Primary Cache: 16K(I) micro-ops + 16KB(D) on chip
 Secondary Cache: 2048KB(I+D) on chip
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 4x512MB ECC DDR2-400 SDRAM
 Disk Subsystem: 1 x 120GB 7200RPM SATA
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux 3 Update 2
 Compiler: Intel C++ and Fortran EM64T Compiler 8.1 Build 20041123
 File System: ext3
 System State: --

Notes/Tuning Information

+FDO: PASS1=-Qprof_gen PASS2=-Qprof_use
 Base tuning for Fortran programs: -fast -auto_ilp32 +FDO
 Portability: (SPEC_CPU2000_LP64 applied to all benchmarks)
 178.galgel: -FI