




CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Dell
PowerEdge 6850 (3.33GHz, Intel Xeon)

SPECfp_rate2000 = --
SPECfp_rate_base2000 = 55.0

SPEC license #: 55 | Tested by: Dell, Round Rock, TX | Test date: Mar-2005 | Hardware Avail: Mar-2005 | Software Avail: Jul-2004

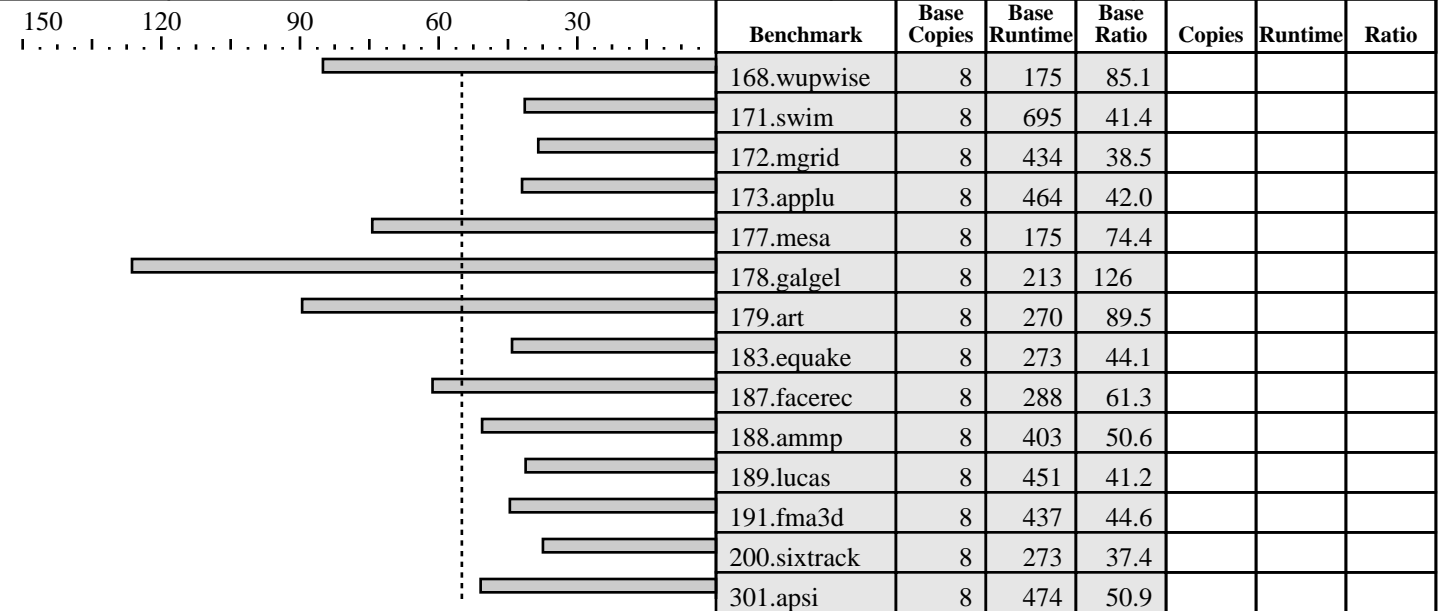

Hardware

CPU: Intel Xeon (3.33GHz, 1MB L2, 8MB L3, 667MHz Bus)
 CPU MHz: 3330
 FPU: Integrated
 CPU(s) enabled: 4 cores, 4 chips, 1 core/chip (Hyper-Threading Technology enabled)
 CPU(s) orderable: 1,2,3,4
 Parallel: No
 Primary Cache: 12K(I) micro-ops + 16KB(D) on chip
 Secondary Cache: 1024KB(I+D) on chip
 L3 Cache: 8192KB(I+D) on chip
 Other Cache: N/A
 Memory: 8 X 2GB (dual-ranked) ECC DDR2-400 SDRAM
 Disk Subsystem: 1 X 18.2GB 15K Ultra320 SCSI
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux 3 Update 2
 Compiler: Intel C++ and Fortran EM64T Compiler 8.1 Build 20040708
 File System: ext3
 System State: Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen PASS2=-Qprof_use
Base tuning for Fortran programs: -fast -auto_ilp32 +FDO
Portability: (SPEC_CPU2000_LP64 applied to all benchmarks)
178.galgel: -FI
```

This result was measured on the Dell PowerEdge 6850.
 The PowerEdge 6800 and PowerEdge 6850 are electronically equivalent.