




CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices
TYAN Tomcat K8E (S2865), AMD Opteron (TM) 180

SPECfp_rate2000 = 34.3
SPECfp_rate_base2000 = 32.3

SPEC license #: 49 Tested by: AMD, Austin TX Test date: Sep-2005 Hardware Avail: Nov-2005 Software Avail: Aug-2005

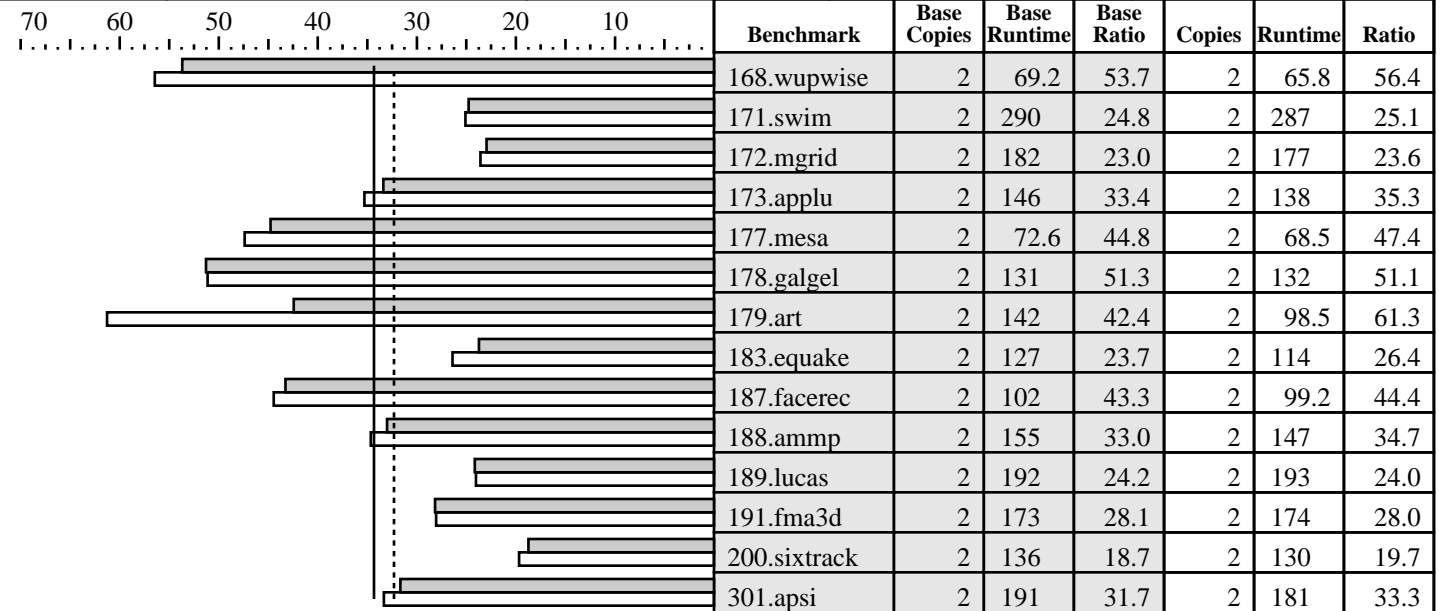

Hardware

CPU: AMD Opteron (TM) 180 (939-pin)
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1
 Parallel: No
 Primary Cache: 64KBI + 64KBD/core
 Secondary Cache: 1024KB (I+D)/core
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 4x512 MB, DDR400 CL2
 Disk Subsystem: IDE, Hitachi 164 GB
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 9 (SP2) for AMD64
 Compiler: PathScale EKOPath(TM) Compiler Suite, Release 2.2.1
 File System: Linux/reiserfs
 System State: Multi-user, run level 3

Notes/Tuning Information

+FDO: PASS1= -fb_create fbdata PASS2= -fb_opt fbdata
 +ACML means -L<acml2.5.1-install-dir>/pathscale64/lib -lacml,
 which causes linking with AMD Core Math Library V2.5.1

Baseline optimization

C programs: -Ofast -WOPT:mem_opnds=on +FDO
 Fortran programs: -Ofast -LNO:fusion=2 -OPT:fast_complex=on +FDO
 Portability Flags:
 178.galgel: -fixedform

Peak Tuning:

168.wupwise: -Ofast -LNO:prefetch Ahead=5:prefetch=3
 -OPT:unroll_times_max=8:unroll_size=128:IEEE_NaN_Inf=off:ro=3
 -IPA:linear=on:plimit=50000:callee_limit=5000
 -INLINE:aggressive=on
 171.swim: -Ofast -CG:local_fwd_sched=on -LNO:fusion=2 -m3dnow



CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices
TYAN Tomcat K8E (S2865), AMD Opteron (TM) 180

SPECfp_rate2000 = 34.3
SPECfp_rate_base2000 = 32.3

SPEC license #: 49 | Tested by: AMD, Austin TX | Test date: Sep-2005 | Hardware Avail: Nov-2005 | Software Avail: Aug-2005

Notes/Tuning Information (Continued)

```

172.mgrid: -Ofast -CG:gcm=off:cflow=on -OPT:IEEE_a=3:unroll_size=200
           -LNO:fusion=2:fission=1:blocking=off:prefetch_ahead=2
           -WOPT:mem_opnds=on:aggstr=0
173.applu: -Ofast -CG:local_fwd_sched=on -OPT:ro=3 -TENV:X=3
           -LNO:fusion=2:fission=2:full_unroll_size=10000:prefetch=3 +FDO
177.mesa: -O2 -ipa -OPT:Ofast -fno-math-errno -CG:local_fwd_sched=on -WOPT:mem_opnds=on +FDO
178.galgel: -Ofast -OPT:fast_complex=on +ACML +FDO
           RM_SOURCES=lapak.f90
179.art: -O3 -OPT:Ofast -fno-math-errno -mno-sse2 -m32
183.quake: -Ofast -CG:load_exe=2 -WOPT:mem_opnds=on -m32 +FDO
187.facerec: -Ofast -LNO:fusion=2
           -OPT:fast_complex=on:IEEE_NaN_Inf=off:unroll_size=0 +FDO
188.ammp: -O3 -OPT:alias=disjoint:unroll_times_max=8:Ofast:ro=3
          -fno-math-errno -TENV:X=4 +FDO
189.lucas: -Ofast -OPT:ro=3:fast_nint=off:unroll_size=256 -WOPT:mem_opnds=on +FDO
191.fma3d: -O2 -ipa -CG:load_exe=1 -OPT:Ofast:IEEE_arith=3:ro=3
          -WOPT:mem_opnds=on:retype_expr=on -IPA:pu_reorder=1 +FDO
200.sixtrack: -O3 -OPT:Ofast:Olimit=6000:early_intrinsics=on
             -fno-math-errno -CG:load_exe=1 +FDO
301.apsi: -Ofast -CG:load_exe=0 -LNO:prefetch=0:simd=2

```

The tested system can be built using a standard ATX case and an Antec True 550W EPS12V power supply.
All memory slots populated on all CPU(s).
BIOS Version 2.01
Taskset utility used to bind CPU(s) to processes.