



CFP2000 Result


Copyright ©1999-2005, Standard Performance Evaluation Corporation

Bull Express5800-120Lh

SPECfp_rate2000 = 19.0

SPECfp_rate_base2000 = 19.0

SPEC license #: 20 | Tested by: Bull | Test date: Nov-2005 | Hardware Avail: Oct-2005 | Software Avail: Oct-2005

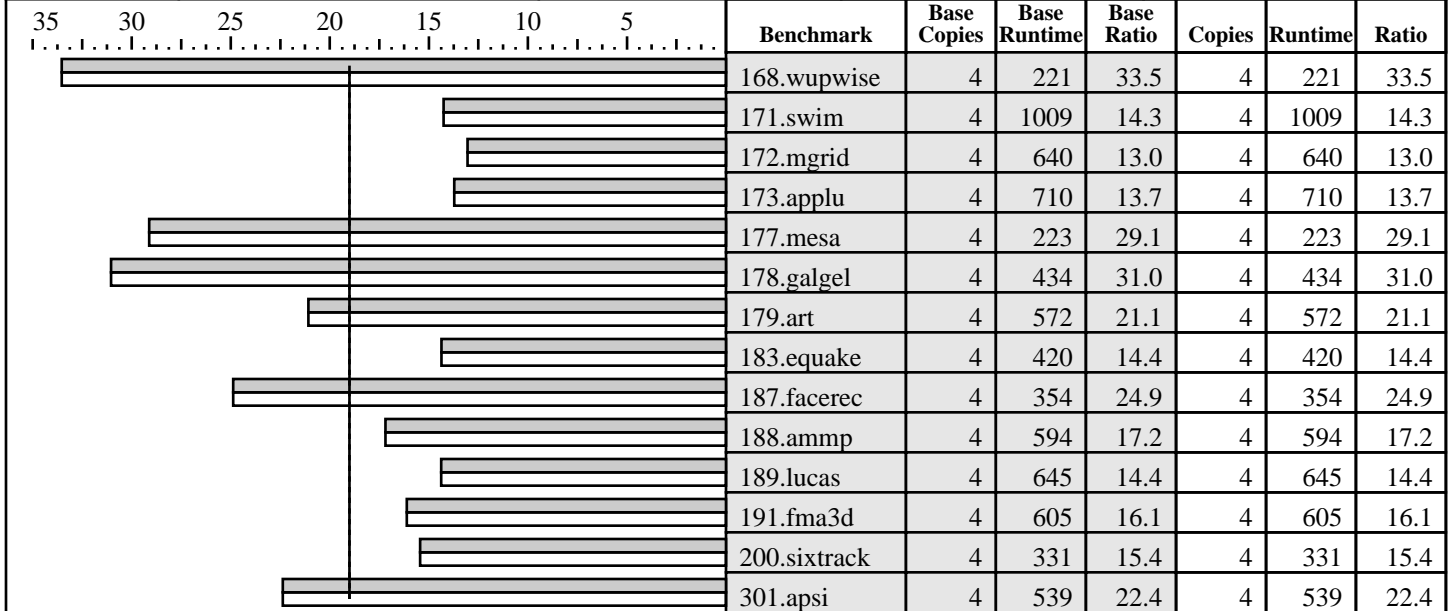

Hardware

CPU: Intel Xeon(2.8GHZ, 2MB L2, 800MHz System bus)
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 2 cores, 2 chips, 1 core/chip (Hyper-Threading Technology enabled)
 CPU(s) orderable: 1 to 2
 Parallel: No
 Primary Cache: 12 KB (I) micro-ops +16 KB (D) on chip
 Secondary Cache: 2MB on chip
 L3 Cache: N/A
 Other Cache: N/A
 Memory: 2* 512 MB SDRAM DDR 333 ECC
 Disk Subsystem: 73 GB SCSI 10000rpm
 Other Hardware:

Software

Operating System: Windows Server 2003 Enterprise Edition (Build 3790)
 Compiler: Intel C/C++ and Fortran Compilers 8.1 for Windows (Build 20051008z)
 Microsoft Visual Studio .net 2003 (7.1.3091, for libraries)
 File System: NTFS
 System State: Default

Notes/Tuning Information

```
+FDO: PASS1=/Qprof_gen PASS2=/Qprof_use
Base tuning:
C programs: -fast -Qansi_alias +FDO
Fortran programs: -fast -Qansi_alias +FDO
```

```
Portability
178.galgel: -FI /F32000000
```

```
Peak tuning flags
same as baseline (basepeak=true set globally)
```

This result was measured with 32-bit binaries using the 32-bit version of the operating system.