



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 318

PowerEdge R930 (Intel Xeon E7-8890 v4, 2.20 GHz)

SPECrate2017_int_peak = Not Run

CPU2017 License: 55


Test Date: Dec-2016

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2016

Tested by: Dell Inc.

Software Availability: Nov-2016

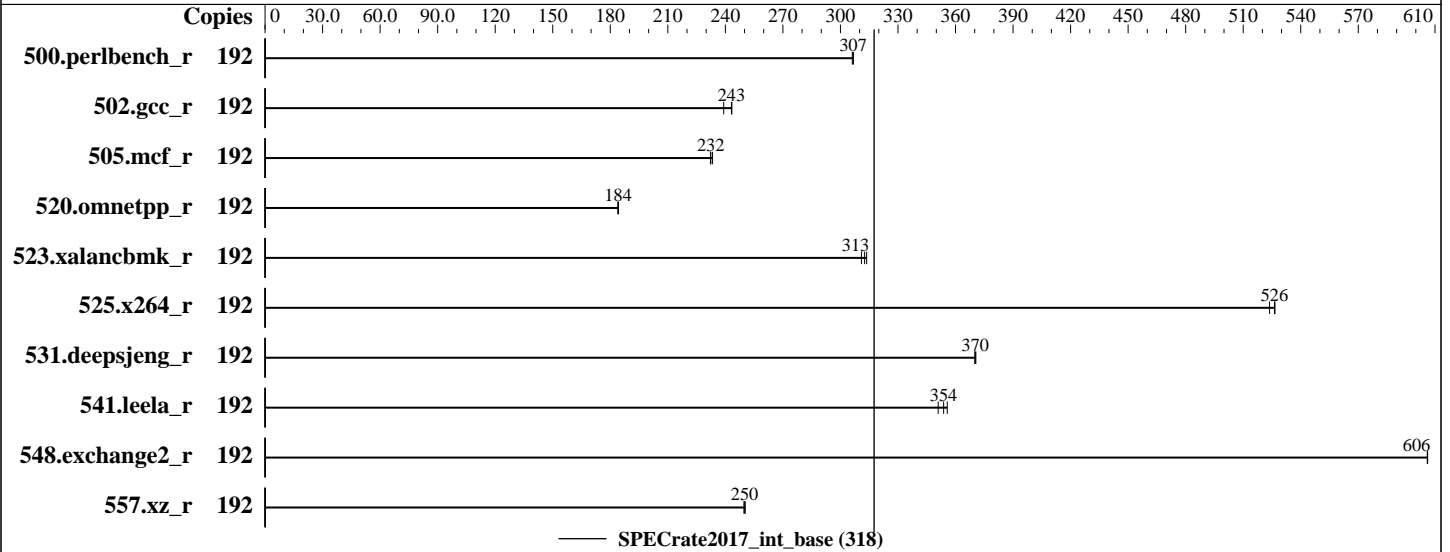

Hardware

CPU Name: Intel Xeon E7-8890 v4
 Max MHz.: 3400
 Nominal: 2200
 Enabled: 96 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (32 x 16 GB 2Rx8 PC4-2133P-R, running at 1600)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: SUSE Linux enterprise Server 12 SP1 3.12.49-11-default
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: 2.2.0
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: Not Applicable
 Other: Microquill SmartHeap V10.2



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 318

PowerEdge R930 (Intel Xeon E7-8890 v4, 2.20 GHz)

SPECrate2017_int_peak = Not Run

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2016
Hardware Availability: Oct-2016
Software Availability: Nov-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	998	306	997	307	997	307							
502.gcc_r	192	1137	239	1117	243	1118	243							
505.mcf_r	192	1336	232	1335	232	1330	233							
520.omnetpp_r	192	1367	184	1369	184	1368	184							
523.xalancbmk_r	192	646	314	652	311	649	313							
525.x264_r	192	642	524	639	526	638	527							
531.deepsjeng_r	192	594	370	595	370	594	371							
541.leela_r	192	906	351	899	354	894	356							
548.exchange2_r	192	830	606	830	606	830	606							
557.xz_r	192	829	250	831	250	828	250							

SPECrate2017_int_base = 318

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/sh10.2"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Platform Notes

BIOS settings:
Snoop Mode set to Cluster on Die
Virtualization Technology disabled
System Profile set to Custom

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 318

PowerEdge R930 (Intel Xeon E7-8890 v4, 2.20 GHz)

SPECrate2017_int_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2016

Hardware Availability: Oct-2016

Software Availability: Nov-2016

Platform Notes (Continued)

CPU Performance set to Hardware P States
 C States set to autonomous
 ClE disabled
 Energy Efficient Turbo disabled
 Uncore Frequency set to Dynamic
 Energy Efficiency Policy set to Balanced Performance
 Memory Patrol Scrub disabled
 Sysinfo program /root/cpu2017/Docs/sysinfo
 Rev: r5007 of 2016-11-15 fc8dc82f217779bedfed4d694d580ba9
 running on linux-lbo5 Sun Dec 11 19:14:25 2016

This section contains SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see <http://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) CPU E7-8890 v4 @ 2.20GHz
 4 "physical id"s (chips)
 192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 24
  siblings  : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
27 28 29
cache size : 30720 KB

```

The view from numactl --hardware follows. WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 96 100 104 108 112 116 120 124
128 132 136 140
node 0 size: 64200 MB
node 0 free: 63684 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 97 101 105 109 113 117 121 125
129 133 137 141
node 1 size: 64637 MB
node 1 free: 64200 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 98 102 106 110 114 118 122 126

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 318

PowerEdge R930 (Intel Xeon E7-8890 v4, 2.20 GHz)

SPECrate2017_int_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2016

Hardware Availability: Oct-2016

Software Availability: Nov-2016

Platform Notes (Continued)

```

130 134 138 142
node 2 size: 64637 MB
node 2 free: 64208 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 99 103 107 111 115 119 123 127
131 135 139 143
node 3 size: 64637 MB
node 3 free: 64195 MB
node 4 cpus: 48 52 56 60 64 68 72 76 80 84 88 92 144 148 152 156 160 164 168
172 176 180 184 188
node 4 size: 64637 MB
node 4 free: 64208 MB
node 5 cpus: 49 53 57 61 65 69 73 77 81 85 89 93 145 149 153 157 161 165 169
173 177 181 185 189
node 5 size: 64637 MB
node 5 free: 64174 MB
node 6 cpus: 50 54 58 62 66 70 74 78 82 86 90 94 146 150 154 158 162 166 170
174 178 182 186 190
node 6 size: 64637 MB
node 6 free: 64198 MB
node 7 cpus: 51 55 59 63 67 71 75 79 83 87 91 95 147 151 155 159 163 167 171
175 179 183 187 191
node 7 size: 64635 MB
node 7 free: 64205 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  21  21  21  11  21  21  21
  1:  21  10  21  21  21  11  21  21
  2:  21  21  10  21  21  21  11  21
  3:  21  21  21  10  21  21  21  11
  4:  11  21  21  21  10  21  21  21
  5:  21  11  21  21  21  10  21  21
  6:  21  21  11  21  21  21  10  21
  7:  21  21  21  11  21  21  21  10

```

```

From /proc/meminfo
MemTotal:      529059184 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 318

PowerEdge R930 (Intel Xeon E7-8890 v4, 2.20 GHz)

SPECrate2017_int_peak = Not Run

CPU2017 License: 55

Test Date: Dec-2016

Test Sponsor: Dell Inc.

Hardware Availability: Oct-2016

Tested by: Dell Inc.

Software Availability: Nov-2016

Platform Notes (Continued)

This file is deprecated and will be removed in a future service pack or release.
Please check /etc/os-release for details about this release.

```
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux linux-lbo5 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 11 10:11
```

```
SPEC is set to: /root/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   439G  13G  427G   3% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Dell Inc. 2.2.0 09/29/2016
Memory:
32x 00AD00B300AD HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1600 MHz
64x Not Specified Not Specified
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC      500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)  
        557.xz_r(base)  
=====
```

```
icc (ICC) 17.0.0 20160721  
Copyright (C) 1985-2016 Intel Corporation. All rights reserved.  
=====
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 318

PowerEdge R930 (Intel Xeon E7-8890 v4, 2.20 GHz)

SPECrate2017_int_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2016

Hardware Availability: Oct-2016

Software Availability: Nov-2016

Compiler Version Notes (Continued)

CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

icpc (ICC) 17.0.0 20160721
Copyright (C) 1985-2016 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

ifort (IFORT) 17.0.0 20160721
Copyright (C) 1985-2016 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502 gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017_int_base = 318

PowerEdge R930 (Intel Xeon E7-8890 v4, 2.20 GHz)

SPECrate2017_int_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2016

Hardware Availability: Oct-2016

Software Availability: Nov-2016

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -auto-p32 -qopt-prefetch  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-p32  
-qopt-prefetch -qopt-mem-layout-trans=3 -L/sh10.2 -lsmartheap64
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic17.0-official-linux64-revD.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge13G-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic17.0-official-linux64-revD.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge13G-revB.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v0.904.0 on 2016-12-11 20:14:24-0500.

Report generated on 2018-10-31 12:38:33 by CPU2017 PDF formatter v6067.

Originally published on 2017-06-19.