



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation


## Fujitsu Fujitsu SPARC M12-2S

SPECrate2017\_int\_base = 7.90

SPECrate2017\_int\_peak = 9.85

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Nov-2017  
Hardware Availability: Apr-2017  
Software Availability: Jul-2017

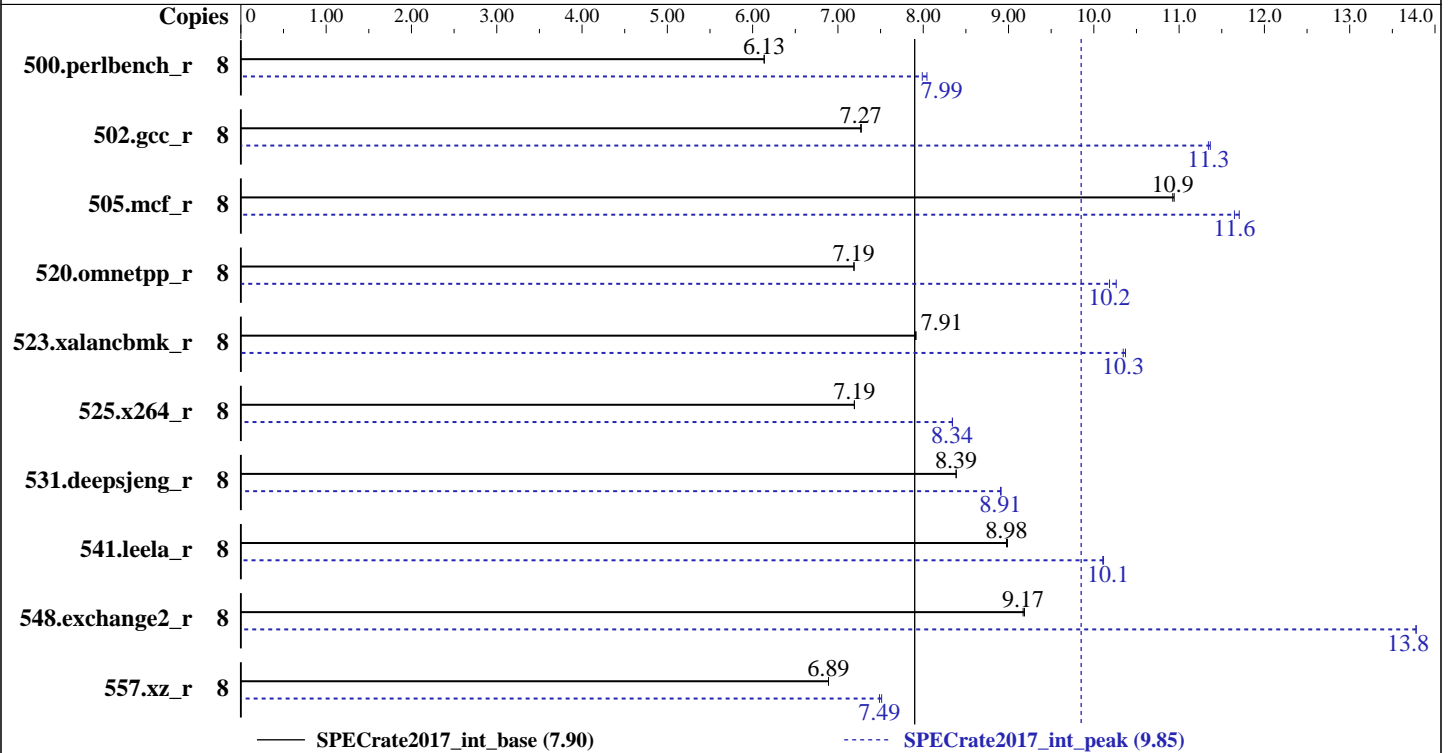

### Hardware

CPU Name: SPARC64 XII  
 Max MHz.: 4350  
 Nominal: 4250  
 Enabled: 1 core, 1 chip, 8 threads/core  
 Orderable: 1 to 16 BBs; each BB contains 1 or 2 CPU chips;  
 2, 3, 4, ... 384 cores  
 Cache L1: 64 KB I + 64 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 32 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-2400T-R)  
 Storage: 1 x 600 GB 10K RPM SAS (for system disk)  
 Other: None

### Software

OS: Oracle Solaris 11.3 SRU 24.4  
 Compiler: C/C++/Fortran: Version 12.6 of Oracle Developer Studio  
 Parallel: No  
 Firmware: Fujitsu HCP Version 3040 released Oct-2017  
 File System: tmpfs  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other: None



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M12-2S

SPECrate2017\_int\_base = 7.90

SPECrate2017\_int\_peak = 9.85

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Nov-2017  
Hardware Availability: Apr-2017  
Software Availability: Jul-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	8	2075	6.14	<b>2076</b>	<b>6.13</b>			8	1583	8.04	<b>1594</b>	<b>7.99</b>		
502.gcc_r	8	<b>1559</b>	<b>7.27</b>	1557	7.27			8	<b>999</b>	<b>11.3</b>	997	11.4		
505.mcf_r	8	1181	10.9	<b>1183</b>	<b>10.9</b>			8	<b>1110</b>	<b>11.6</b>	1104	11.7		
520.omnetpp_r	8	<b>1461</b>	<b>7.19</b>	1460	7.19			8	<b>1031</b>	<b>10.2</b>	1023	10.3		
523.xalancbmk_r	8	<b>1068</b>	<b>7.91</b>	1067	7.92			8	<b>817</b>	<b>10.3</b>	815	10.4		
525.x264_r	8	1947	7.19	<b>1948</b>	<b>7.19</b>			8	1679	8.34	<b>1679</b>	<b>8.34</b>		
531.deepsjeng_r	8	<b>1093</b>	<b>8.39</b>	1093	8.39			8	<b>1029</b>	<b>8.91</b>	1029	8.91		
541.leela_r	8	1474	8.99	<b>1476</b>	<b>8.98</b>			8	<b>1311</b>	<b>10.1</b>	1310	10.1		
548.exchange2_r	8	<b>2285</b>	<b>9.17</b>	2282	9.19			8	1521	13.8	<b>1521</b>	<b>13.8</b>		
557.xz_r	8	<b>1254</b>	<b>6.89</b>	1254	6.89			8	<b>1154</b>	<b>7.49</b>	1150	7.51		

SPECrate2017\_int\_base = 7.90

SPECrate2017\_int\_peak = 9.85

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

## Operating System Notes

Shell Environments:

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

The "Logical Domains Manager" service was turned off using the command "svcadm disable ldmd".

System Tunables:

(/etc/system parameters)

autoup = 86400

Causes pages older than the listed number of seconds to be written by fsflush.

doiflush = 0

Controls whether file system metadata syncs will be executed during fsflush invocations.

dopageflush = 0

Controls whether memory is examined for modified pages during fsflush invocations.

zfs:zfs\_arc\_max=1073741824

Determines the maximum size of the ZFS Adaptive Replacement Cache (ARC).



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Fujitsu**  
**Fujitsu SPARC M12-2S**

SPECrate2017\_int\_base = 7.90

SPECrate2017\_int\_peak = 9.85

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Nov-2017  
**Hardware Availability:** Apr-2017  
**Software Availability:** Jul-2017

## General Notes

The Building Block (BB) is just a Fujitsu SPARC M12-2S that is the basic unit to be expanded as if stacking up children's blocks.

File System:

tmpfs: output\_root was used to put run directories in /tmp/cpu2017  
zfs: operating system

Binaries were compiled on a system with 2x SPARC64 XII CPU + 1TB Memory using Oracle Solaris 11.3 SRU 24.4

## Platform Notes

Firmware Settings:

(XSCF operations)

Set High Speed Mode via XSCF command "sethsmode -s on".

Sysinfo program /export/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on H2S-202-D0 Mon Nov 27 18:25:30 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /usr/sbin/psrinfo

SPARC64-XII (chipid 0, clock 4250 MHz)  
1 chips  
8 threads  
4250 MHz

From kstat: 1 cores

From prtconf: 521728 Megabytes

/etc/release:

Oracle Solaris 11.3 SPARC

uname -a:

SunOS H2S-202-D0 5.11 11.3 sun4v sparc sun4v

disk: df -h /export/cpu2017

Filesystem	Size	Used	Available	Capacity	Mounted on
rpool/export	547G	8.0G	75G	10%	/export

(End of data from sysinfo program)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M12-2S

SPECrate2017\_int\_base = 7.90  
SPECrate2017\_int\_peak = 9.85

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Nov-2017  
Hardware Availability: Apr-2017  
Software Availability: Jul-2017

## Compiler Version Notes

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base)  
541.leela\_r(base)  
-----

CC: Studio 12.6 Sun C++ 5.15 SunOS\_sparc 2017/05/30  
-----

=====  
CXXC 520.omnetpp\_r(peak) 531.deepsjeng\_r(peak) 541.leela\_r(peak)  
-----

CC: Studio 12.6 Sun C++ 5.15 SunOS\_sparc 2017/05/30  
-----

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base)  
557.xz\_r(base)  
-----

cc: Studio 12.6 Sun C 5.15 SunOS\_sparc 2017/05/30  
-----

=====  
CC 500.perlbench\_r(peak) 502.gcc\_r(peak) 505.mcf\_r(peak) 525.x264\_r(peak)  
557.xz\_r(peak)  
-----

cc: Studio 12.6 Sun C 5.15 SunOS\_sparc 2017/05/30  
-----

=====  
FC 548.exchange2\_r(base)  
-----

f90: Studio 12.6 Fortran 95 8.8 SunOS\_sparc 2017/05/30  
-----

=====  
FC 548.exchange2\_r(peak)  
-----

f90: Studio 12.6 Fortran 95 8.8 SunOS\_sparc 2017/05/30  
-----

## Base Compiler Invocation

C benchmarks:  
cc

C++ benchmarks:  
CC

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M12-2S

SPECrate2017\_int\_base = 7.90

SPECrate2017\_int\_peak = 9.85

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Nov-2017  
Hardware Availability: Apr-2017  
Software Availability: Jul-2017

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
f90

## Base Portability Flags

```
500.perlbench_r: -DSPEC_SOLARIS_SPARC
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -D_FILE_OFFSET_BITS=64
520.omnetpp_r: -DSPEC_GCC_MANGLE -D_FILE_OFFSET_BITS=64
523.xalancbmk_r: -DSPEC_SOLARIS -D_FILE_OFFSET_BITS=64
525.x264_r: -D_FILE_OFFSET_BITS=64
531.deepsjeng_r: -D_FILE_OFFSET_BITS=64
541.leela_r: -D_FILE_OFFSET_BITS=64
548.exchange2_r: -D_FILE_OFFSET_BITS=64
557.xz_r: -D_FILE_OFFSET_BITS=64
```

## Base Optimization Flags

C benchmarks:  
-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M  
-xsegment\_align=4M -xthroughput -xalias\_level=weak

C++ benchmarks:  
-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M  
-xsegment\_align=4M -xthroughput -std=c++03 -lfast

Fortran benchmarks:  
-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M  
-xsegment\_align=4M -xthroughput

## Base Other Flags

C benchmarks:  
-xjobs=8

C++ benchmarks:  
-xjobs=8

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M12-2S

SPECrate2017\_int\_base = 7.90

SPECrate2017\_int\_peak = 9.85

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Nov-2017  
Hardware Availability: Apr-2017  
Software Availability: Jul-2017

## Base Other Flags (Continued)

Fortran benchmarks:  
-xjobs=8

## Peak Compiler Invocation

C benchmarks:  
cc

C++ benchmarks:  
CC

Fortran benchmarks:  
f90

## Peak Portability Flags

```
500.perlbenc_r: -DSPEC_SOLARIS_SPARC
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -D_FILE_OFFSET_BITS=64
520.omnetpp_r: -D_FILE_OFFSET_BITS=64
523.xalancbmk_r: -DSPEC_SOLARIS -D_FILE_OFFSET_BITS=64
525.x264_r: -D_FILE_OFFSET_BITS=64
531.deepsjeng_r: -D_FILE_OFFSET_BITS=64
541.leela_r: -D_FILE_OFFSET_BITS=64
548.exchange2_r: -D_FILE_OFFSET_BITS=64
557.xz_r: -D_FILE_OFFSET_BITS=64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbenc_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput -xO4
-xalias_level=layout -xinline_param=level:3 -lfast

502.gcc_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput -xtarget=sparc64xplus
-xipo=1 -xinline_param=level:3 -xprefetch=no%auto
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M12-2S

SPECrate2017\_int\_base = 7.90

SPECrate2017\_int\_peak = 9.85

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Nov-2017  
Hardware Availability: Apr-2017  
Software Availability: Jul-2017

## Peak Optimization Flags (Continued)

502.gcc\_r (continued):

```
-xthroughput=no -lfast
```

505.mcf\_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32

```
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M  
-xsegment_align=256M -xthroughput -xalias_level=strong  
-xprefetch=no%auto -xthroughput=no
```

525.x264\_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32

```
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M  
-xsegment_align=256M -xthroughput -xunroll=3  
-xprefetch=no%auto -W2,-Afully_unroll:always=on
```

557.xz\_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32

```
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M  
-xsegment_align=256M -xthroughput -xalias_level=std  
-xprefetch=latx:0.4
```

C++ benchmarks:

520.omnetpp\_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32

```
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M  
-xsegment_align=256M -xthroughput -xalias_level=compatible  
-xprefetch=latx:0.4 -library=stdcxx4 -template=extdef  
-lfast
```

523.xalancbmk\_r: -m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M

```
-xsegment_align=256M -xthroughput -xprefetch=no%auto  
-library=stlport4 -lfast
```

531.deepsjeng\_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32

```
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M  
-xsegment_align=256M -xthroughput -xalias_level=compatible  
-xinline_param=level:1 -xunroll=2 -xprefetch=no%auto  
-std=c++03
```

541.leela\_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32

```
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M  
-xsegment_align=256M -xthroughput  
-xinline_param=max_growth:500 -xprefetch=no%auto  
-xthroughput=no -Wc,-Qiselect-funcalign=4  
-Qoption iropt -Afully_unroll:always=on -std=c++03
```

Fortran benchmarks:

```
-xprofile=collect:./feedback -xprofile=use:./feedback -m32 -fast  
-xtarget=sparc64xii -xipo=2 -xpagesize=256M -xsegment_align=256M
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Fujitsu**  
**Fujitsu SPARC M12-2S**

SPECrate2017\_int\_base = 7.90

SPECrate2017\_int\_peak = 9.85

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Nov-2017  
**Hardware Availability:** Apr-2017  
**Software Availability:** Jul-2017

## Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-xthroughput -xtarget=sparc64xplus -xprefetch=no%auto  
-Qoption iropt -Afully_unroll:always=on
```

## Peak Other Flags

C benchmarks:

```
-xjobs=8
```

C++ benchmarks:

```
-xjobs=8
```

Fortran benchmarks:

```
-xjobs=8
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Oracle-Developer-Studio12.6.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-M12-2S.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Oracle-Developer-Studio12.6.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-M12-2S.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-11-27 04:25:28-0500.

Report generated on 2018-10-31 13:28:03 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.