



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation


## Fujitsu Fujitsu SPARC M12-2S

SPECrate2017\_int\_base = 2090

SPECrate2017\_int\_peak = 2610

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Dec-2017  
Hardware Availability: Apr-2017  
Software Availability: Jul-2017

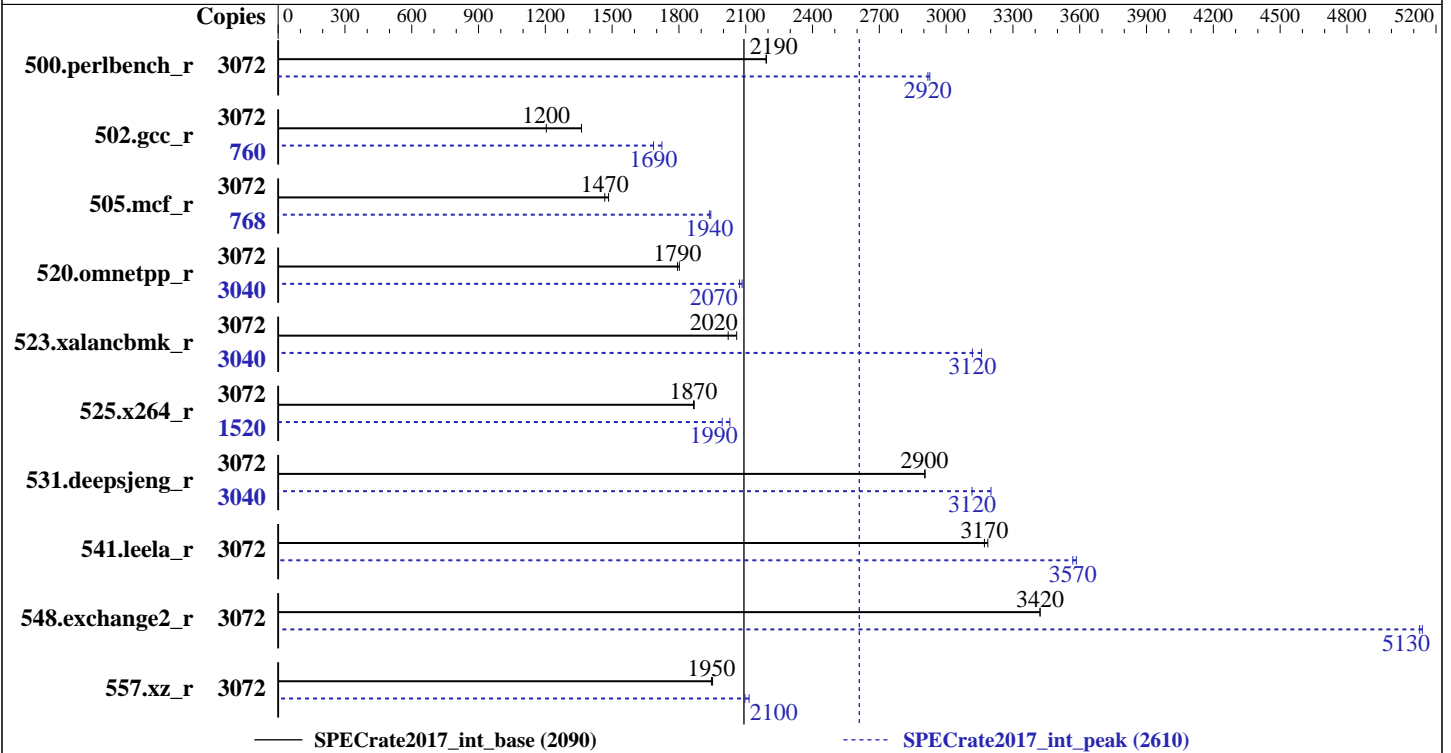

### Hardware

CPU Name: SPARC64 XII  
 Max MHz.: 4350  
 Nominal: 4250  
 Enabled: 384 cores, 32 chips, 8 threads/core  
 Orderable: 1 to 16 BBs; each BB contains 1 or 2 CPU chips;  
 2, 3, 4, ... 384 cores  
 Cache L1: 64 KB I + 64 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 32 MB I+D on chip per chip  
 Other: None  
 Memory: 16896 GB (256 x 32 GB 2Rx4 PC4-2400T-R, 136 x 64  
 GB 4Rx4 PC4-2400T-R)  
 Storage: 1 x 600 GB 10K RPM SAS (for system disk)  
 Other: None

### Software

OS: Oracle Solaris 11.3 SRU 24.4  
 Compiler: C/C++/Fortran: Version 12.6 of Oracle Developer  
 Studio  
 Parallel: No  
 Firmware: Fujitsu HCP Version 3040 released Oct-2017  
 File System: tmpfs  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other: None



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M12-2S

SPECrate2017\_int\_base = 2090

SPECrate2017\_int\_peak = 2610

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Dec-2017  
Hardware Availability: Apr-2017  
Software Availability: Jul-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	3072	<b><u>2232</u></b>	<b><u>2190</u></b>	2230	2190			3072	1671	2930	<b><u>1676</u></b>	<b><u>2920</u></b>		
502.gcc_r	3072	3193	1360	<b><u>3612</u></b>	<b><u>1200</u></b>			760	624	1720	<b><u>638</u></b>	<b><u>1690</u></b>		
505.mcf_r	3072	3345	1480	<b><u>3384</u></b>	<b><u>1470</u></b>			768	<b><u>641</u></b>	<b><u>1940</u></b>	639	1940		
520.omnetpp_r	3072	<b><u>2247</u></b>	<b><u>1790</u></b>	2237	1800			3040	<b><u>1925</u></b>	<b><u>2070</u></b>	1914	2080		
523.xalancbmk_r	3072	1575	2060	<b><u>1605</u></b>	<b><u>2020</u></b>			3040	1016	3160	<b><u>1030</u></b>	<b><u>3120</u></b>		
525.x264_r	3072	2879	1870	<b><u>2884</u></b>	<b><u>1870</u></b>			1520	<b><u>1335</u></b>	<b><u>1990</u></b>	1312	2030		
531.deepsjeng_r	3072	<b><u>1213</u></b>	<b><u>2900</u></b>	1212	2910			3040	1088	3200	<b><u>1118</u></b>	<b><u>3120</u></b>		
541.leela_r	3072	<b><u>1604</u></b>	<b><u>3170</u></b>	1596	3190			3072	<b><u>1425</u></b>	<b><u>3570</u></b>	1419	3580		
548.exchange2_r	3072	2352	3420	<b><u>2352</u></b>	<b><u>3420</u></b>			3072	<b><u>1570</u></b>	<b><u>5130</u></b>	1566	5140		
557.xz_r	3072	1700	1950	<b><u>1705</u></b>	<b><u>1950</u></b>			3072	1569	2120	<b><u>1583</u></b>	<b><u>2100</u></b>		

SPECrate2017\_int\_base = 2090

SPECrate2017\_int\_peak = 2610

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

## Operating System Notes

### Shell Environments:

ulimit -s 131072 was used to limit the space consumed by the stack (and therefore make more space available to the heap).

The "Logical Domains Manager" service was turned off using the command "svcadm disable ldmd".

### System Tunables:

(/etc/system parameters)

autoup = 86400

Causes pages older than the listed number of seconds to be written by fsflush.

doiflush = 0

Controls whether file system metadata syncs will be executed during fsflush invocations.

dopageflush = 0

Controls whether memory is examined for modified pages during fsflush invocations.

zfs:zfs\_arc\_max=1073741824

Determines the maximum size of the ZFS Adaptive Replacement Cache (ARC).



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M12-2S

SPECrate2017\_int\_base = 2090

SPECrate2017\_int\_peak = 2610

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2017  
**Hardware Availability:** Apr-2017  
**Software Availability:** Jul-2017

## General Notes

The Building Block (BB) is just a Fujitsu SPARC M12-2S that is the basic unit to be expanded as if stacking up children's blocks.

File System:

tmpfs: output\_root was used to put run directories in /tmp/cpu2017  
zfs: operating system

Binaries were compiled on a system with 2x SPARC64 XII CPU + 1TB Memory using Oracle Solaris 11.3 SRU 24.4

## Platform Notes

Firmware Settings:

(XSCF operations)

Set High Speed Mode via XSCF command "sethsmode -s on".

Sysinfo program /export/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on H2S-230-D0 Mon Dec 4 18:04:15 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /usr/sbin/psrinfo

```
SPARC64-XII (chipid 0, clock 4250 MHz)
SPARC64-XII (chipid 1, clock 4250 MHz)
SPARC64-XII (chipid 10, clock 4250 MHz)
SPARC64-XII (chipid 11, clock 4250 MHz)
SPARC64-XII (chipid 12, clock 4250 MHz)
SPARC64-XII (chipid 13, clock 4250 MHz)
SPARC64-XII (chipid 14, clock 4250 MHz)
SPARC64-XII (chipid 15, clock 4250 MHz)
SPARC64-XII (chipid 16, clock 4250 MHz)
SPARC64-XII (chipid 17, clock 4250 MHz)
SPARC64-XII (chipid 18, clock 4250 MHz)
SPARC64-XII (chipid 19, clock 4250 MHz)
SPARC64-XII (chipid 2, clock 4250 MHz)
SPARC64-XII (chipid 20, clock 4250 MHz)
SPARC64-XII (chipid 21, clock 4250 MHz)
SPARC64-XII (chipid 22, clock 4250 MHz)
SPARC64-XII (chipid 23, clock 4250 MHz)
SPARC64-XII (chipid 24, clock 4250 MHz)
SPARC64-XII (chipid 25, clock 4250 MHz)
SPARC64-XII (chipid 26, clock 4250 MHz)
SPARC64-XII (chipid 27, clock 4250 MHz)
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M12-2S

SPECrate2017\_int\_base = 2090

SPECrate2017\_int\_peak = 2610

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Dec-2017  
Hardware Availability: Apr-2017  
Software Availability: Jul-2017

## Platform Notes (Continued)

SPARC64-XII (chipid 28, clock 4250 MHz)  
SPARC64-XII (chipid 29, clock 4250 MHz)  
SPARC64-XII (chipid 3, clock 4250 MHz)  
SPARC64-XII (chipid 30, clock 4250 MHz)  
SPARC64-XII (chipid 31, clock 4250 MHz)  
SPARC64-XII (chipid 4, clock 4250 MHz)  
SPARC64-XII (chipid 5, clock 4250 MHz)  
SPARC64-XII (chipid 6, clock 4250 MHz)  
SPARC64-XII (chipid 7, clock 4250 MHz)  
SPARC64-XII (chipid 8, clock 4250 MHz)  
SPARC64-XII (chipid 9, clock 4250 MHz)  
32 chips  
3072 threads  
4250 MHz

From kstat: 384 cores

From prtconf: 17275904 Megabytes

/etc/release:  
Oracle Solaris 11.3 SPARC  
uname -a:  
SunOS H2S-230-D0 5.11 11.3 sun4v sparc sun4v

disk: df -h /export/cpu2017  
Filesystem Size Used Available Capacity Mounted on  
rpool/export 547G 136G 87G 61% /export

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CXXC 520.omnetpp\_r(base) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base)  
541.leela\_r(base)

-----  
CC: Studio 12.6 Sun C++ 5.15 SunOS\_sparc 2017/05/30  
-----

=====  
CXXC 520.omnetpp\_r(peak) 531.deepsjeng\_r(peak) 541.leela\_r(peak)

-----  
CC: Studio 12.6 Sun C++ 5.15 SunOS\_sparc 2017/05/30  
-----  
=====

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M12-2S

SPECrate2017\_int\_base = 2090

SPECrate2017\_int\_peak = 2610

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Dec-2017  
Hardware Availability: Apr-2017  
Software Availability: Jul-2017

## Compiler Version Notes (Continued)

CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base)  
557.xz\_r(base)

-----  
cc: Studio 12.6 Sun C 5.15 SunOS\_sparc 2017/05/30  
-----

=====  
CC 500.perlbench\_r(peak) 502.gcc\_r(peak) 505.mcf\_r(peak) 525.x264\_r(peak)  
557.xz\_r(peak)

-----  
cc: Studio 12.6 Sun C 5.15 SunOS\_sparc 2017/05/30  
-----

=====  
FC 548.exchange2\_r(base)

-----  
f90: Studio 12.6 Fortran 95 8.8 SunOS\_sparc 2017/05/30  
-----

=====  
FC 548.exchange2\_r(peak)

-----  
f90: Studio 12.6 Fortran 95 8.8 SunOS\_sparc 2017/05/30  
-----

## Base Compiler Invocation

C benchmarks:  
cc

C++ benchmarks:  
CC

Fortran benchmarks:  
f90

## Base Portability Flags

500.perlbench\_r: -DSPEC\_SOLARIS\_SPARC  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -D\_FILE\_OFFSET\_BITS=64  
520.omnetpp\_r: -DSPEC\_GCC\_MANGLE -D\_FILE\_OFFSET\_BITS=64  
523.xalancbmk\_r: -DSPEC\_SOLARIS -D\_FILE\_OFFSET\_BITS=64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M12-2S

SPECrate2017\_int\_base = 2090

SPECrate2017\_int\_peak = 2610

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Dec-2017  
Hardware Availability: Apr-2017  
Software Availability: Jul-2017

## Base Portability Flags (Continued)

```
525.x264_r: -D_FILE_OFFSET_BITS=64
531.deepsjeng_r: -D_FILE_OFFSET_BITS=64
541.leela_r: -D_FILE_OFFSET_BITS=64
548.exchange2_r: -D_FILE_OFFSET_BITS=64
557.xz_r: -D_FILE_OFFSET_BITS=64
```

## Base Optimization Flags

C benchmarks:

```
-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xalias_level=weak
```

C++ benchmarks:

```
-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -std=c++03 -lfast
```

Fortran benchmarks:

```
-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput
```

## Base Other Flags

C benchmarks:

```
-xjobs=8
```

C++ benchmarks:

```
-xjobs=8
```

Fortran benchmarks:

```
-xjobs=8
```

## Peak Compiler Invocation

C benchmarks:

```
cc
```

C++ benchmarks:

```
cc
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu  
Fujitsu SPARC M12-2S

SPECrate2017\_int\_base = 2090

SPECrate2017\_int\_peak = 2610

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Dec-2017  
Hardware Availability: Apr-2017  
Software Availability: Jul-2017

## Peak Compiler Invocation (Continued)

Fortran benchmarks:  
f90

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_SOLARIS_SPARC
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -D_FILE_OFFSET_BITS=64
520.omnetpp_r: -D_FILE_OFFSET_BITS=64
523.xalancbmk_r: -DSPEC_SOLARIS -D_FILE_OFFSET_BITS=64
525.x264_r: -D_FILE_OFFSET_BITS=64
531.deepsjeng_r: -D_FILE_OFFSET_BITS=64
541.leela_r: -D_FILE_OFFSET_BITS=64
548.exchange2_r: -D_FILE_OFFSET_BITS=64
557.xz_r: -D_FILE_OFFSET_BITS=64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput -xO4
-xalias_level=layout -xinline_param=level:3 -lfast

502.gcc_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput -xtarget=sparc64xplus
-xipo=1 -xinline_param=level:3 -xprefetch=no%auto
-xthroughput=no -lfast

505.mcf_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput -xalias_level=strong
-xprefetch=no%auto -xthroughput=no

525.x264_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput -xunroll=3
-xprefetch=no%auto -W2,-Afully_unroll:always=on
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC M12-2S

SPECrate2017\_int\_base = 2090

SPECrate2017\_int\_peak = 2610

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2017

Hardware Availability: Apr-2017

Software Availability: Jul-2017

## Peak Optimization Flags (Continued)

```
557.xz_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput -xalias_level=std
-xprefetch=latx:0.4
```

C++ benchmarks:

```
520.omnetpp_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput -xalias_level=compatible
-xprefetch=latx:0.4 -library=stdcxx4 -template=extdef
-lfast
```

```
523.xalancbmk_r: -m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput -xprefetch=no%auto
-library=stlport4 -lfast
```

```
531.deepsjeng_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput -xalias_level=compatible
-xinline_param=level:1 -xunroll=2 -xprefetch=no%auto
-std=c++03
```

```
541.leela_r: -xprofile=collect:./feedback -xprofile=use:./feedback -m32
-fast -xtarget=sparc64xii -xipo=2 -xpagesize=256M
-xsegment_align=256M -xthroughput
-xinline_param=max_growth:500 -xprefetch=no%auto
-xthroughput=no -Wc,-Qiselect-funcalign=4
-Qoption iropt -Afully_unroll:always=on -std=c++03
```

Fortran benchmarks:

```
-xprofile=collect:./feedback -xprofile=use:./feedback -m32 -fast
-xtarget=sparc64xii -xipo=2 -xpagesize=256M -xsegment_align=256M
-xthroughput -xtarget=sparc64xplus -xprefetch=no%auto
-Qoption iropt -Afully_unroll:always=on
```

## Peak Other Flags

C benchmarks:

```
-xjobs=8
```

C++ benchmarks:

```
-xjobs=8
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Fujitsu**  
**Fujitsu SPARC M12-2S**

SPECrate2017\_int\_base = 2090

SPECrate2017\_int\_peak = 2610

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Dec-2017  
**Hardware Availability:** Apr-2017  
**Software Availability:** Jul-2017

## Peak Other Flags (Continued)

Fortran benchmarks:  
-xjobs=8

The flags files that were used to format this result can be browsed at  
<http://www.spec.org/cpu2017/flags/Oracle-Developer-Studio12.6.html>  
<http://www.spec.org/cpu2017/flags/Fujitsu-M12-2S.html>

You can also download the XML flags sources by saving the following links:  
<http://www.spec.org/cpu2017/flags/Oracle-Developer-Studio12.6.xml>  
<http://www.spec.org/cpu2017/flags/Fujitsu-M12-2S.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-12-04 04:04:13-0500.  
Report generated on 2018-10-31 13:25:37 by CPU2017 PDF formatter v6067.  
Originally published on 2017-12-26.