



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017\_int\_base = 151

SPECrate2017\_int\_peak = 160

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

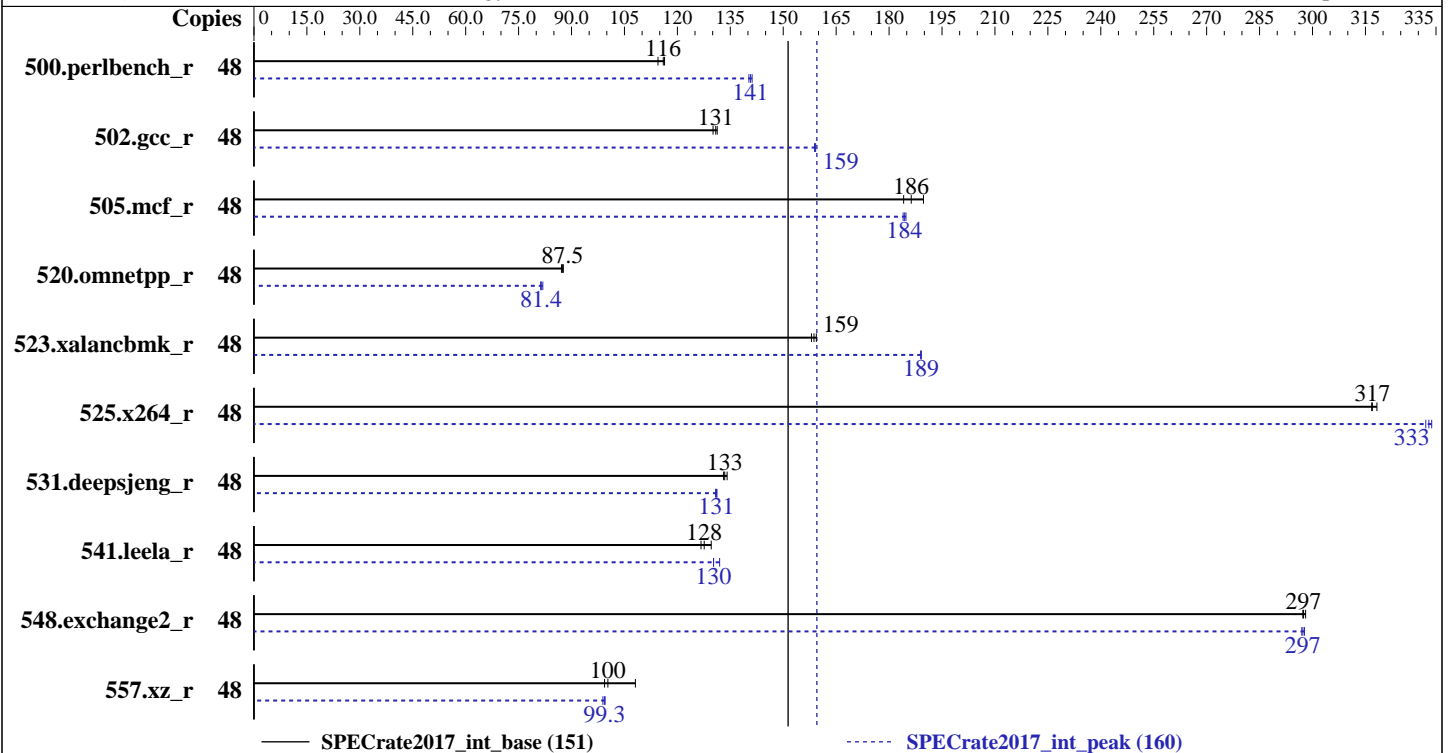

### Hardware

CPU Name: Intel Xeon Gold 6136  
 Max MHz.: 3700  
 Nominal: 3000  
 Enabled: 24 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 24.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 800 GB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
 Kernel 4.4.21-69-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version IVE111I 1.01 released Aug-2017  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library V5.0.1;  
 jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
 jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
 jemalloc: sources available from jemalloc.net or releases



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017\_int\_base = 151

SPECrate2017\_int\_peak = 160

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	657	116	667	115	<b>659</b>	<b>116</b>	48	541	141	<b>543</b>	<b>141</b>	545	140
502.gcc_r	48	518	131	<b>519</b>	<b>131</b>	522	130	48	427	159	<b>427</b>	<b>159</b>	428	159
505.mcf_r	48	409	190	<b>416</b>	<b>186</b>	421	184	48	<b>421</b>	<b>184</b>	422	184	420	185
520.omnetpp_r	48	723	87.1	<b>720</b>	<b>87.5</b>	718	87.7	48	769	81.9	<b>773</b>	<b>81.4</b>	775	81.2
523.xalancbmk_r	48	318	159	<b>319</b>	<b>159</b>	321	158	48	268	189	268	189	<b>268</b>	<b>189</b>
525.x264_r	48	265	317	264	318	<b>265</b>	<b>317</b>	48	<b>252</b>	<b>333</b>	253	332	252	334
531.deepsjeng_r	48	410	134	<b>412</b>	<b>133</b>	413	133	48	420	131	419	131	<b>420</b>	<b>131</b>
541.leela_r	48	613	130	<b>623</b>	<b>128</b>	627	127	48	<b>610</b>	<b>130</b>	610	130	602	132
548.exchange2_r	48	<b>423</b>	<b>297</b>	423	297	422	298	48	<b>423</b>	<b>297</b>	423	297	422	298
557.xz_r	48	480	108	<b>517</b>	<b>100</b>	522	99.4	48	<b>522</b>	<b>99.3</b>	524	98.9	521	99.5

SPECrate2017\_int\_base = **151**

SPECrate2017\_int\_peak = **160**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"  
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_int\_base = 151

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017\_int\_peak = 160

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

## General Notes (Continued)

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance  
MONITORMWAIT set to Enable  
Execute Disable Bit set to Disable  
Trusted Execution Technology set to Enable  
Stale AtoS set to Enable  
LLC Deadline Alloc set to Disable  
Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on Cyborg-SPECcpu2017-SUSE12SP2 Thu Jan 4 10:31:05 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 12
siblings : 24
physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26
physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_int\_base = 151

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017\_int\_peak = 160

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```

Byte Order:                Little Endian
CPU(s):                    48
On-line CPU(s) list:      0-47
Thread(s) per core:       2
Core(s) per socket:      12
Socket(s):                 2
NUMA node(s):             2
Vendor ID:                 GenuineIntel
CPU family:                6
Model:                     85
Model name:                Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz
Stepping:                  4
CPU MHz:                   2992.953
BogoMIPS:                  5985.90
Virtualization:           VT-x
L1d cache:                 32K
L1i cache:                 32K
L2 cache:                  1024K
L3 cache:                  25344K
NUMA node0 CPU(s):        0-11,24-35
NUMA node1 CPU(s):        12-23,36-47
Flags:                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 24 25 26 27 28 29 30 31 32 33 34 35
node 0 size: 193098 MB
node 0 free: 191660 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 36 37 38 39 40 41 42 43 44 45 46 47
node 1 size: 193504 MB
node 1 free: 192102 MB
node distances:
node  0  1
 0:   0  21
 1:  21   0

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017\_int\_base = 151

SPECrate2017\_int\_peak = 160

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```

From /proc/meminfo
  MemTotal:          395881764 kB
  HugePages_Total:   0
  Hugepagesize:      2048 kB

From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
  Linux Cyborg-SPECcpu2017-SUSE12SP2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC
  2016 (9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 3 18:30

SPEC is set to: /home/cpu2017.1.0.2.ic18.0
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sdb2        btrfs    744G      185G  559G   25% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS Lenovo -[IVE111I-1.01]- 08/11/2017
  Memory:
    24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

```

### Compiler Version Notes

```

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
   525.x264_r(base, peak) 557.xz_r(base, peak)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017\_int\_base = 151

SPECrate2017\_int\_peak = 160

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

=====  
CC 500.perlbench\_r(peak) 502.gcc\_r(peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(base) 523.xalanbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(peak) 523.xalanbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base, peak)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017\_int\_base = 151

SPECrate2017\_int\_peak = 160

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017\_int\_base = 151

SPECrate2017\_int\_peak = 160

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017\_int\_base = 151

SPECrate2017\_int\_peak = 160

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

525.x264\_r (continued):

```
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-m64 -std=c11
```

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

```
-m64
```

523.xalancbmk\_r: -m32

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR650  
(3.00 GHz, Intel Xeon Gold 6136)

SPECrate2017\_int\_base = 151

SPECrate2017\_int\_peak = 160

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-01-03 21:31:05-0500.

Report generated on 2018-10-31 16:51:30 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-06.