



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro


A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7261)

SPECrate2017\_int\_base = 89.6

SPECrate2017\_int\_peak = 96.6

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jun-2018  
Hardware Availability: Jun-2017  
Software Availability: Feb-2018

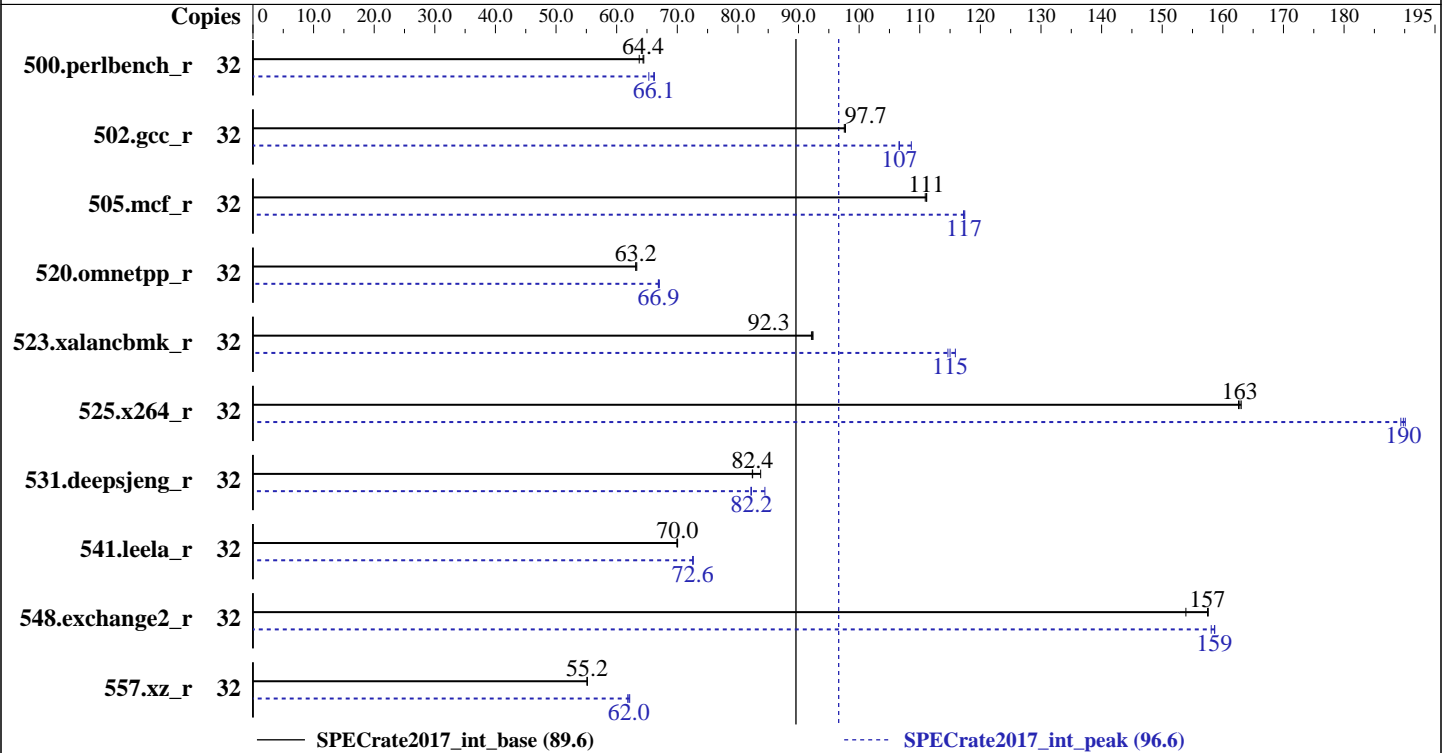

### Hardware

CPU Name: AMD EPYC 7261  
Max MHz.: 2900  
Nominal: 2500  
Enabled: 16 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 64 KB I + 32 KB D on chip per core  
L2: 512 KB I+D on chip per core  
L3: 64 MB I+D on chip per chip  
Other: None  
Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)  
Storage: 1 x 500 GB SATAIII, 7200 RPM  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
kernel 4.4.114-94.11-default  
Compiler: C/C++: Version 1.0.0 of AOCC  
Fortran: Version 4.8.2 of GCC  
Parallel: No  
Firmware: Supermicro BIOS version 1.1a released May-2018  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc general purpose malloc implementation  
V4.5.0



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7261)

SPECrate2017\_int\_base = 89.6

SPECrate2017\_int\_peak = 96.6

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jun-2018  
Hardware Availability: Jun-2017  
Software Availability: Feb-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	799	63.7	<b><u>792</u></b>	<b><u>64.4</u></b>	790	64.5	32	780	65.3	<b><u>771</u></b>	<b><u>66.1</u></b>	769	66.2
502.gcc_r	32	464	97.7	<b><u>464</u></b>	<b><u>97.7</u></b>	465	97.5	32	425	107	417	109	<b><u>425</u></b>	<b><u>107</u></b>
505.mcf_r	32	466	111	<b><u>465</u></b>	<b><u>111</u></b>	465	111	32	441	117	<b><u>441</u></b>	<b><u>117</u></b>	440	117
520.omnetpp_r	32	<b><u>665</u></b>	<b><u>63.2</u></b>	663	63.3	665	63.2	32	628	66.9	626	67.0	<b><u>627</u></b>	<b><u>66.9</u></b>
523.xalancbmk_r	32	367	92.1	<b><u>366</u></b>	<b><u>92.3</u></b>	366	92.4	32	<b><u>294</u></b>	<b><u>115</u></b>	292	116	295	115
525.x264_r	32	344	163	<b><u>344</u></b>	<b><u>163</u></b>	345	163	32	295	190	<b><u>295</u></b>	<b><u>190</u></b>	296	189
531.deepsjeng_r	32	<b><u>445</u></b>	<b><u>82.4</u></b>	438	83.8	445	82.4	32	434	84.5	446	82.1	<b><u>446</u></b>	<b><u>82.2</u></b>
541.leela_r	32	756	70.1	758	69.9	<b><u>757</u></b>	<b><u>70.0</u></b>	32	<b><u>730</u></b>	<b><u>72.6</u></b>	730	72.6	730	72.6
548.exchange2_r	32	545	154	<b><u>532</u></b>	<b><u>157</u></b>	532	158	32	528	159	530	158	<b><u>529</u></b>	<b><u>159</u></b>
557.xz_r	32	<b><u>627</u></b>	<b><u>55.2</u></b>	627	55.1	627	55.2	32	559	61.8	<b><u>557</u></b>	<b><u>62.0</u></b>	556	62.2

SPECrate2017\_int\_base = 89.6

SPECrate2017\_int\_peak = 96.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT, AMD EPYC 7261)

SPECrate2017\_int\_base = 89.6

SPECrate2017\_int\_peak = 96.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jun-2017  
**Software Availability:** Feb-2018

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/amd1704-rate-libs-revC/64;/home/cpu2017/amd1704-rate-libs-revC/32:"  
MALLOC\_CONF = "lg\_chunk:26"

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here:  
<http://developer.amd.com/amd-aocc/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at  
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>  
jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.  
jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.  
lg\_chunk: set the virtual memory chunk size (log base 2). For example,  
lg\_chunk:21 sets the default chunk size to 2<sup>21</sup> = 2MiB.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:  
Determinism Slider = Power  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-769d Mon Jun 4 10:27:10 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 7261 8-Core Processor  
2 "physical id"s (chips)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7261)

SPECrate2017\_int\_base = 89.6

SPECrate2017\_int\_peak = 96.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jun-2017  
**Software Availability:** Feb-2018

### Platform Notes (Continued)

32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 16
physical 0: cores 0 4 8 12 16 20 24 28
physical 1: cores 0 4 8 12 16 20 24 28
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                32
On-line CPU(s) list:   0-31
Thread(s) per core:    2
Core(s) per socket:    8
Socket(s):             2
NUMA node(s):         8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                1
Model name:            AMD EPYC 7261 8-Core Processor
Stepping:              2
CPU MHz:               2500.000
CPU max MHz:           2500.0000
CPU min MHz:           1200.0000
BogoMIPS:              4999.84
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             64K
L2 cache:              512K
L3 cache:              8192K
NUMA node0 CPU(s):    0,1,16,17
NUMA node1 CPU(s):    2,3,18,19
NUMA node2 CPU(s):    4,5,20,21
NUMA node3 CPU(s):    6,7,22,23
NUMA node4 CPU(s):    8,9,24,25
NUMA node5 CPU(s):    10,11,26,27
NUMA node6 CPU(s):    12,13,28,29
NUMA node7 CPU(s):    14,15,30,31
```

```
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7261)

SPECrate2017\_int\_base = 89.6

SPECrate2017\_int\_peak = 96.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jun-2017  
**Software Availability:** Feb-2018

### Platform Notes (Continued)

flushbyasid decodeassists pausefilter pfthreshold vmcall avic fsgsbase bml avx2  
smep bmi2 rdseed adx smap clflushopt sha\_ni xsaveopt xsavec xgetbv1 clzero irperf  
ibpb overflow\_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 16 17
node 0 size: 128851 MB
node 0 free: 128738 MB
node 1 cpus: 2 3 18 19
node 1 size: 129021 MB
node 1 free: 128907 MB
node 2 cpus: 4 5 20 21
node 2 size: 129021 MB
node 2 free: 128912 MB
node 3 cpus: 6 7 22 23
node 3 size: 129021 MB
node 3 free: 128914 MB
node 4 cpus: 8 9 24 25
node 4 size: 129021 MB
node 4 free: 128926 MB
node 5 cpus: 10 11 26 27
node 5 size: 129021 MB
node 5 free: 128924 MB
node 6 cpus: 12 13 28 29
node 6 size: 129021 MB
node 6 free: 128930 MB
node 7 cpus: 14 15 30 31
node 7 size: 116923 MB
node 7 free: 116836 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 16 16 16 32 32 32 32
1:  16 10 16 16 32 32 32 32
2:  16 16 10 16 32 32 32 32
3:  16 16 16 10 32 32 32 32
4:  32 32 32 32 10 16 16 16
5:  32 32 32 32 16 10 16 16
6:  32 32 32 32 16 16 10 16
7:  32 32 32 32 16 16 16 10
```

```
From /proc/meminfo
MemTotal: 1044379616 kB
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7261)

SPECrate2017\_int\_base = 89.6

SPECrate2017\_int\_peak = 96.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jun-2017  
**Software Availability:** Feb-2018

### Platform Notes (Continued)

HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)  
VERSION = 12  
PATCHLEVEL = 3

# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"  
VERSION="12-SP3"  
VERSION\_ID="12.3"  
PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP3"  
ID="sles"  
ANSI\_COLOR="0;32"  
CPE\_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-769d 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 May 31 11:19

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	422G	25G	397G	6%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.1a 05/02/2018

Memory:

16x Samsung M386A8K40BM2-CTD 64 GB 4 rank 2667

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 502.gcc\_r(peak)  
-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7261)

SPECrate2017\_int\_base = 89.6

SPECrate2017\_int\_peak = 96.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jun-2017  
**Software Availability:** Feb-2018

### Compiler Version Notes (Continued)

Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CXXC 523.xalancbmk\_r(peak)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CC 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base) 557.xz\_r(base, peak)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CXXC 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base,  
peak) 541.leela\_r(base)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CC 500.perlbench\_r(peak) 525.x264\_r(peak)

-----  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7261)

SPECrate2017\_int\_base = 89.6

SPECrate2017\_int\_peak = 96.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jun-2017  
**Software Availability:** Feb-2018

## Compiler Version Notes (Continued)

=====  
CXXC 541.leela\_r(peak)  
-----

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
-----

=====  
FC 548.exchange2\_r(base, peak)  
-----

GNU Fortran (GCC) 4.8.2  
Copyright (C) 2013 Free Software Foundation, Inc.  
GNU Fortran comes with NO WARRANTY, to the extent permitted by law.  
You may redistribute copies of GNU Fortran  
under the terms of the GNU General Public License.  
For more information about these matters, see the file named COPYING  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang\_gfortran

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT, AMD EPYC 7261)

SPECrate2017\_int\_base = 89.6

SPECrate2017\_int\_peak = 96.6

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Jun-2018  
Hardware Availability: Jun-2017  
Software Availability: Feb-2018

## Base Portability Flags (Continued)

557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2  
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2  
-inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100  
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs  
-ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop  
-disable-vect-cmp -O3(gfortran) -O3(clang) -mavx -madox  
-funroll-loops -ffast-math -z muldefs -Ofast -fdefault-integer-8  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="  
-enable-iv-split -inline-threshold:1000 -disable-vect-cmp" -ljemalloc  
-lgfortran -lamdlibm
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7261)

SPECrate2017\_int\_base = 89.6

SPECrate2017\_int\_peak = 96.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jun-2017  
**Software Availability:** Feb-2018

## Peak Portability Flags (Continued)

```
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc
```

```
502.gcc_r: -m32 -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -fgnu89-inline
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

```
505.mcf_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively
-mno-avx2 -unroll-threshold=100 -fremap-arrays
-inline-threshold=1000 -ljemalloc
```

525.x264\_r: Same as 500.perlbench\_r

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

A+ Server 4023S-TRT  
(H11DSi-NT , AMD EPYC 7261)

SPECrate2017\_int\_base = 89.6

SPECrate2017\_int\_peak = 96.6

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Jun-2018  
**Hardware Availability:** Jun-2017  
**Software Availability:** Feb-2018

## Peak Optimization Flags (Continued)

```
523.xalancbmk_r: -m32 -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -Ofast -march=znver1
-finline-aggressive -mllvm -unroll-threshold=100
-freemap-arrays -inline-threshold=1000
-L/root/work/lib/jemalloc/lib32 -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

```
541.leela_r: -flto -Wl, -plugin-opt= -merge-constant
-lsr-in-nested-loop -fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver1 -mllvm
-unroll-count=8 -unroll-threshold=100 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-O3(gfortran) -O3(clang) -mavx2 -madx -funroll-loops -ffast-math
-Ofast -fdefault-integer-8 -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=" -enable-iv-split
-inline-threshold:1000 -disable-vect-cmp" -ljemalloc -lgfortran
-lamdlibm
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>  
<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>  
<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>  
<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Naples-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-06-03 22:27:09-0400.  
Report generated on 2019-02-21 15:58:37 by CPU2017 PDF formatter v6067.  
Originally published on 2018-06-26.