



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170M  
2.10 GHz)

SPECrate2017\_fp\_base = 233

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2018

Hardware Availability: Aug-2017

Software Availability: Oct-2018

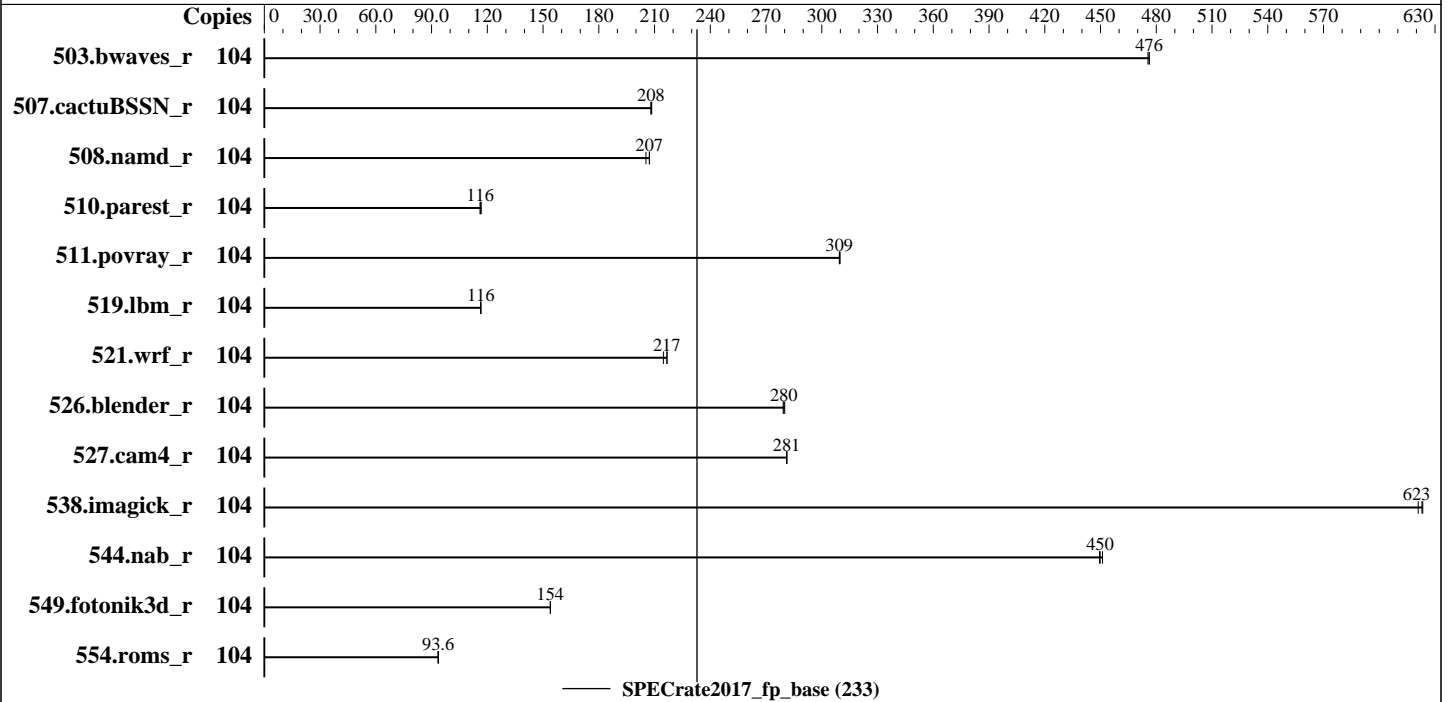

### Hardware

CPU Name: Intel Xeon Platinum 8170M  
 Max MHz.: 3700  
 Nominal: 2100  
 Enabled: 52 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 Chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 400 GB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
 4.4.120-92.70-default  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 4.0.1 released Oct-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170M 2.10 GHz)

SPECrate2017\_fp\_base = 233

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9019  
Test Sponsor: Cisco Systems  
Tested by: Cisco Systems

Test Date: Dec-2018  
Hardware Availability: Aug-2017  
Software Availability: Oct-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	104	2190	476	<b><u>2190</u></b>	<b><u>476</u></b>	2193	476							
507.cactuBSSN_r	104	633	208	632	208	<b><u>633</u></b>	<b><u>208</u></b>							
508.namd_r	104	477	207	481	205	<b><u>477</u></b>	<b><u>207</u></b>							
510.parest_r	104	2342	116	2331	117	<b><u>2342</u></b>	<b><u>116</u></b>							
511.povray_r	104	<b><u>785</u></b>	<b><u>309</u></b>	785	309	784	310							
519.lbm_r	104	941	117	941	116	<b><u>941</u></b>	<b><u>116</u></b>							
521.wrf_r	104	<b><u>1075</u></b>	<b><u>217</u></b>	1085	215	1075	217							
526.blender_r	104	566	280	<b><u>566</u></b>	<b><u>280</u></b>	567	279							
527.cam4_r	104	647	281	647	281	<b><u>647</u></b>	<b><u>281</u></b>							
538.imagick_r	104	417	621	415	623	<b><u>415</u></b>	<b><u>623</u></b>							
544.nab_r	104	<b><u>389</u></b>	<b><u>450</u></b>	388	451	389	449							
549.fotonik3d_r	104	2634	154	2632	154	<b><u>2633</u></b>	<b><u>154</u></b>							
554.roms_r	104	<b><u>1766</u></b>	<b><u>93.6</u></b>	1764	93.7	1768	93.5							

SPECrate2017\_fp\_base = 233

SPECrate2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170M 2.10 GHz)

SPECrate2017\_fp\_base = 233

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Dec-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Oct-2018

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Intel HyperThreading Technology set to Enabled

CPU performance set to Enterprise

Power Performance Tuning set to OS Controls

SNC set to Enabled

IMC Interleaving set to 1-way Interleave

Patrol Scrub set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-klde Fri Dec 7 22:34:18 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8170M CPU @ 2.10GHz

2 "physical id"s (chips)

104 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 26

siblings : 52

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 104

On-line CPU(s) list: 0-103

Thread(s) per core: 2

Core(s) per socket: 26

Socket(s): 2

NUMA node(s): 4

Vendor ID: GenuineIntel

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170M 2.10 GHz)

SPECrate2017\_fp\_base = 233

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Dec-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** Oct-2018

### Platform Notes (Continued)

```

CPU family:           6
Model:               85
Model name:          Intel(R) Xeon(R) Platinum 8170M CPU @ 2.10GHz
Stepping:            4
CPU MHz:             1000.273
CPU max MHz:         3700.0000
CPU min MHz:         1000.0000
BogoMIPS:            4190.15
Virtualization:      VT-x
L1d cache:           32K
L1i cache:           32K
L2 cache:            1024K
L3 cache:            36608K
NUMA node0 CPU(s):  0-3,7-9,13-15,20-22,52-55,59-61,65-67,72-74
NUMA node1 CPU(s):  4-6,10-12,16-19,23-25,56-58,62-64,68-71,75-77
NUMA node2 CPU(s):  26-29,33-35,39-41,46-48,78-81,85-87,91-93,98-100
NUMA node3 CPU(s):  30-32,36-38,42-45,49-51,82-84,88-90,94-97,101-103
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp
retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt
clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 20 21 22 52 53 54 55 59 60 61 65 66 67 72 73 74
node 0 size: 192098 MB
node 0 free: 191820 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 19 23 24 25 56 57 58 62 63 64 68 69 70 71 75 76 77
node 1 size: 193528 MB
node 1 free: 193274 MB
node 2 cpus: 26 27 28 29 33 34 35 39 40 41 46 47 48 78 79 80 81 85 86 87 91 92 93 98 99
100
node 2 size: 193528 MB
node 2 free: 193293 MB
node 3 cpus: 30 31 32 36 37 38 42 43 44 45 49 50 51 82 83 84 88 89 90 94 95 96 97 101
102 103
node 3 size: 193525 MB

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170M 2.10 GHz)

SPECrate2017\_fp\_base = 233

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Dec-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** Oct-2018

### Platform Notes (Continued)

```

node 3 free: 193156 MB
node distances:
node  0  1  2  3
  0:  10  11  21  21
  1:  11  10  21  21
  2:  21  21  10  11
  3:  21  21  11  10

From /proc/meminfo
MemTotal:          791225668 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux linux-klde 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 7 22:31

SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   212G  114G   99G  54% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS Cisco Systems, Inc. C240M5.4.0.1.139.1003182220 10/03/2018
Memory:
24x 0xCE00 M393A4K40BB2-CTD 32 GB 2 rank 2666

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170M 2.10 GHz)

SPECrate2017\_fp\_base = 233

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Dec-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** Oct-2018

### Platform Notes (Continued)

(End of data from sysinfo program)

### Compiler Version Notes

```

=====
CC  519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----

icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
CXXC 508.namd_r(base) 510.parest_r(base)
-----

icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
CC  511.povray_r(base) 526.blender_r(base)
-----

icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
FC  507.cactuBSSN_r(base)
-----

icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
icc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
ifort (IFORT) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
FC  503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
-----

ifort (IFORT) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170M 2.10 GHz)

SPECrate2017\_fp\_base = 233

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Dec-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Oct-2018

## Compiler Version Notes (Continued)

CC 521.wrf\_r(base) 527.cam4\_r(base)

ifort (IFORT) 19.0.1.144 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 19.0.1.144 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170M 2.10 GHz)

SPECrate2017\_fp\_base = 233

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Dec-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Oct-2018

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-12-07 12:04:17-0500.

Report generated on 2019-02-01 14:42:24 by CPU2017 PDF formatter v6067.

Originally published on 2019-01-29.