



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 199

PowerEdge M640 (Intel Xeon Gold 6222V, 1.80GHz)

SPECrate®2017\_int\_peak = 207

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Aug-2019

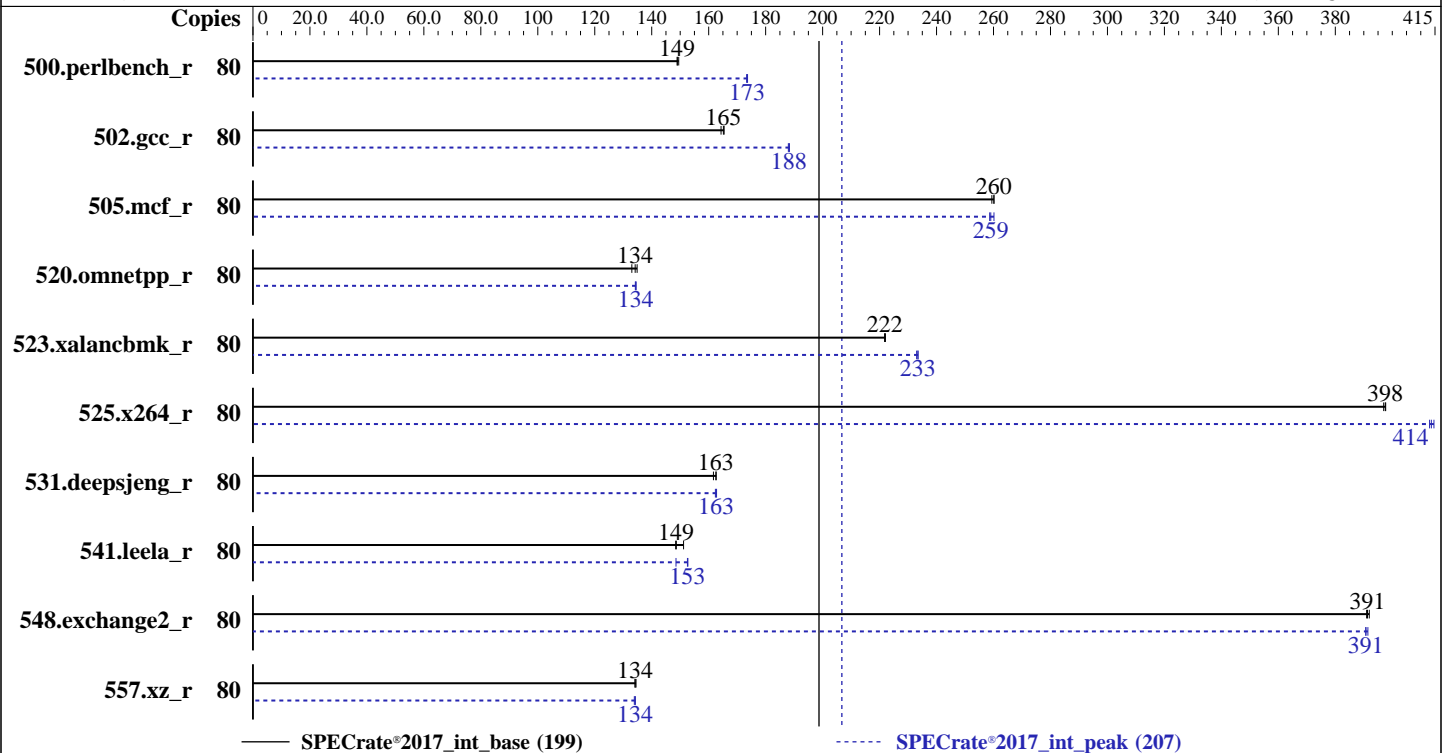

### Hardware

CPU Name: Intel Xeon Gold 6222V  
 Max MHz: 3600  
 Nominal: 1800  
 Enabled: 40 cores, 2 chips, 2 threads/core  
 Orderable: 2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 27.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R, running at 2400)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: Ubuntu 18.04.2 LTS  
 kernel 4.15.0-58-generic  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version 2.2.11 released Jun-2019  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 199

PowerEdge M640 (Intel Xeon Gold 6222V, 1.80GHz)

SPECrate®2017\_int\_peak = 207

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Jun-2019  
Hardware Availability: Apr-2019  
Software Availability: Aug-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	80	855	149	852	149	<b>855</b>	<b>149</b>	80	<b>734</b>	<b>173</b>	733	174	735	173
502.gcc_r	80	<b>686</b>	<b>165</b>	685	165	689	164	80	<b>602</b>	<b>188</b>	603	188	601	188
505.mcf_r	80	498	259	<b>497</b>	<b>260</b>	497	260	80	497	260	<b>499</b>	<b>259</b>	500	259
520.omnetpp_r	80	<b>782</b>	<b>134</b>	778	135	789	133	80	782	134	<b>781</b>	<b>134</b>	780	134
523.xalancbmk_r	80	380	222	381	222	<b>381</b>	<b>222</b>	80	363	233	<b>362</b>	<b>233</b>	362	234
525.x264_r	80	353	397	<b>352</b>	<b>398</b>	352	398	80	<b>339</b>	<b>414</b>	338	415	339	413
531.deepsjeng_r	80	<b>564</b>	<b>163</b>	567	162	564	163	80	<b>564</b>	<b>163</b>	563	163	565	162
541.leela_r	80	876	151	<b>891</b>	<b>149</b>	893	148	80	868	153	892	149	<b>868</b>	<b>153</b>
548.exchange2_r	80	<b>536</b>	<b>391</b>	535	392	536	391	80	<b>536</b>	<b>391</b>	536	391	535	391
557.xz_r	80	642	134	<b>644</b>	<b>134</b>	644	134	80	<b>644</b>	<b>134</b>	645	134	644	134

SPECrate®2017\_int\_base = **199**

SPECrate®2017\_int\_peak = **207**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 199

PowerEdge M640 (Intel Xeon Gold 6222V, 1.80GHz)

SPECrate®2017\_int\_peak = 207

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Aug-2019

## General Notes (Continued)

numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:  
ADDDC setting disabled  
Sub NUMA Cluster enabled  
Virtualization Technology disabled  
DCU Streamer Prefetcher enabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1E disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub disabled  
Logical Processor enabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on intel-sut Fri Aug 30 15:47:04 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6222V CPU @ 1.80GHz  
2 "physical id"s (chips)  
80 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 20  
siblings : 40  
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28  
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 80

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 199

PowerEdge M640 (Intel Xeon Gold 6222V, 1.80GHz)

SPECrate®2017\_int\_peak = 207

CPU2017 License: 55

Test Date: Jun-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## Platform Notes (Continued)

```

On-line CPU(s) list: 0-79
Thread(s) per core: 2
Core(s) per socket: 20
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6222V CPU @ 1.80GHz
Stepping: 7
CPU MHz: 1978.822
BogoMIPS: 3600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 28160K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 28160 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76
node 0 size: 95144 MB
node 0 free: 94792 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77
node 1 size: 96743 MB
node 1 free: 96436 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 199

PowerEdge M640 (Intel Xeon Gold 6222V, 1.80GHz)

SPECrate®2017\_int\_peak = 207

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

```

node 2 size: 96764 MB
node 2 free: 96374 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79
node 3 size: 96762 MB
node 3 free: 96494 MB
node distances:
node 0 1 2 3
0: 10 21 11 21
1: 21 10 21 11
2: 11 21 10 21
3: 21 11 21 10

```

```

From /proc/meminfo
MemTotal: 394664936 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

/usr/bin/lsb_release -d
Ubuntu 18.04.2 LTS

```

```

From /etc/*release* /etc/*version*
debian_version: buster/sid
os-release:
NAME="Ubuntu"
VERSION="18.04.2 LTS (Bionic Beaver)"
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 18.04.2 LTS"
VERSION_ID="18.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"

```

```

uname -a:
Linux intel-sut 4.15.0-58-generic #64-Ubuntu SMP Tue Aug 6 11:12:41 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

```

CVE-2017-5754 (Meltdown): Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swaps barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB
filling

```

run-level 3 Aug 30 15:46

SPEC is set to: /home/cpu2017

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 199

PowerEdge M640 (Intel Xeon Gold 6222V, 1.80GHz)

SPECrate®2017\_int\_peak = 207

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	439G	32G	385G	8%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 2.2.11 06/14/2019

Memory:

```
6x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2400
3x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2400
3x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933, configured at 2400
4x Not Specified Not Specified
```

(End of data from sysinfo program)

## Compiler Version Notes

C | 502.gcc\_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 199

PowerEdge M640 (Intel Xeon Gold 6222V, 1.80GHz)

SPECrate®2017\_int\_peak = 207

CPU2017 License: 55

Test Date: Jun-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

```
-----
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++      | 523.xalancbmk_r(peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++      | 523.xalancbmk_r(peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran  | 548.exchange2_r(base, peak)
-----
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 199

PowerEdge M640 (Intel Xeon Gold 6222V, 1.80GHz)

SPECrate®2017\_int\_peak = 207

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Aug-2019

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 199

PowerEdge M640 (Intel Xeon Gold 6222V, 1.80GHz)

SPECrate®2017\_int\_peak = 207

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2019

Hardware Availability: Apr-2019

Software Availability: Aug-2019

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
```

```
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-fno-strict-overflow
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

```
502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
```

```
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 199

PowerEdge M640 (Intel Xeon Gold 6222V, 1.80GHz)

SPECrate®2017\_int\_peak = 207

CPU2017 License: 55

Test Date: Jun-2019

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

## Peak Optimization Flags (Continued)

505.mcf\_r (continued):

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

525.x264\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4 -fno-alias
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

523.xalancbmk\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

```
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-L/usr/local/je5.0.1-32/lib -ljemallocc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmallocc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revE3.xml>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 199

PowerEdge M640 (Intel Xeon Gold 6222V, 1.80GHz)

SPECrate®2017\_int\_peak = 207

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Jun-2019

**Hardware Availability:** Apr-2019

**Software Availability:** Aug-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-30 11:47:03-0400.

Report generated on 2019-10-01 14:14:55 by CPU2017 PDF formatter v6255.

Originally published on 2019-10-01.