



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro


SuperWorkstation 5039C-T (X11SCA , Intel Xeon E-2288G)

SPECrate®2017\_int\_base = 58.2

SPECrate®2017\_int\_peak = 61.2

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Nov-2019  
Hardware Availability: May-2019  
Software Availability: May-2019

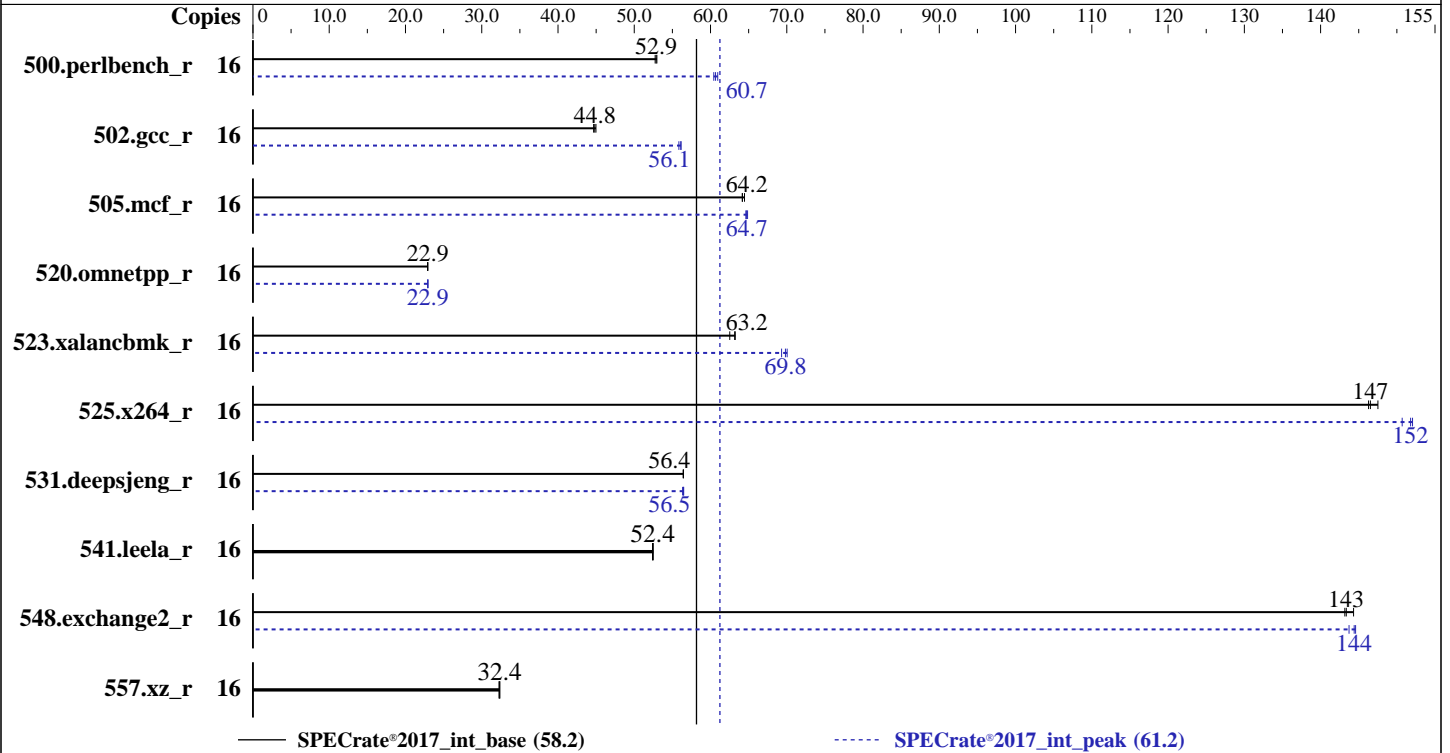

### Hardware

CPU Name: Intel Xeon E-2288G  
Max MHz: 5000  
Nominal: 3700  
Enabled: 8 cores, 1 chip, 2 threads/core  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 256 KB I+D on chip per core  
L3: 16 MB I+D on chip per chip  
Other: None  
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)  
Storage: 1 x 200 GB SATA III SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64)  
Kernel 4.12.14-94.41-default  
Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux;  
Fortran: Version 19.0.4.227 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Version 1.1 released Aug-2019  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Xeon E-2288G)

SPECrate®2017\_int\_base = 58.2

SPECrate®2017\_int\_peak = 61.2

CPU2017 License: 001176  
Test Sponsor: Supermicro  
Tested by: Supermicro

Test Date: Nov-2019  
Hardware Availability: May-2019  
Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	16	481	53.0	483	52.7	<b>482</b>	<b>52.9</b>	16	422	60.4	<b>420</b>	<b>60.7</b>	418	60.9
502.gcc_r	16	507	44.7	<b>505</b>	<b>44.8</b>	504	45.0	16	404	56.1	406	55.8	<b>404</b>	<b>56.1</b>
505.mcf_r	16	401	64.5	403	64.2	<b>403</b>	<b>64.2</b>	16	<b>399</b>	<b>64.7</b>	400	64.6	399	64.9
520.omnetpp_r	16	916	22.9	916	22.9	<b>916</b>	<b>22.9</b>	16	915	22.9	916	22.9	<b>915</b>	<b>22.9</b>
523.xalancbmk_r	16	270	62.5	267	63.2	<b>267</b>	<b>63.2</b>	16	244	69.3	<b>242</b>	<b>69.8</b>	241	70.0
525.x264_r	16	192	146	190	148	<b>191</b>	<b>147</b>	16	184	152	<b>185</b>	<b>152</b>	186	151
531.deepsjeng_r	16	325	56.4	<b>325</b>	<b>56.4</b>	325	56.4	16	325	56.3	325	56.5	<b>325</b>	<b>56.5</b>
541.leela_r	16	<b>505</b>	<b>52.4</b>	506	52.4	505	52.5	16	<b>505</b>	<b>52.4</b>	506	52.4	505	52.5
548.exchange2_r	16	293	143	<b>292</b>	<b>143</b>	290	144	16	290	145	292	144	<b>290</b>	<b>144</b>
557.xz_r	16	534	32.4	536	32.3	<b>534</b>	<b>32.4</b>	16	534	32.4	536	32.3	<b>534</b>	<b>32.4</b>

SPECrate®2017\_int\_base = **58.2**

SPECrate®2017\_int\_peak = **61.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Xeon E-2288G)

SPECrate®2017\_int\_base = 58.2

SPECrate®2017\_int\_peak = 61.2

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2019  
**Hardware Availability:** May-2019  
**Software Availability:** May-2019

### General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

### Platform Notes

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on 135-175-3 Fri Nov 8 20:12:08 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) E-2288G CPU @ 3.70GHz  
1 "physical id"s (chips)  
16 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16  
physical 0: cores 0 1 2 3 4 5 6 7

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 16  
On-line CPU(s) list: 0-15  
Thread(s) per core: 2  
Core(s) per socket: 8  
Socket(s): 1  
NUMA node(s): 1  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 158  
Model name: Intel(R) Xeon(R) E-2288G CPU @ 3.70GHz  
Stepping: 13  
CPU MHz: 3700.000

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Xeon E-2288G)

SPECrate®2017\_int\_base = 58.2

SPECrate®2017\_int\_peak = 61.2

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2019  
**Hardware Availability:** May-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

CPU max MHz: 5000.0000  
CPU min MHz: 800.0000  
BogoMIPS: 7392.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 256K  
L3 cache: 16384K  
NUMA node0 CPU(s): 0-15

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfmperf tsc\_known\_freq pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb invpcid\_single ssbd ibrs ibpb stibp tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel\_pt xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp\_notify hwp\_act\_window hwp\_epp flush\_lld arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 16384 KB
```

```
From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
node 0 size: 64258 MB
node 0 free: 63717 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal: 65801124 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Xeon E-2288G)

SPECrate®2017\_int\_base = 58.2

SPECrate®2017\_int\_peak = 61.2

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2019  
**Hardware Availability:** May-2019  
**Software Availability:** May-2019

### Platform Notes (Continued)

```
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

```
uname -a:
Linux 135-175-3 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      No status reported
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Indirect Branch Restricted
Speculation, IBPB, IBRS_FW
```

```
run-level 3 Nov 8 20:00
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   145G  4.0G  141G   3% /home
```

```
From /sys/devices/virtual/dmi/id
BIOS:      American Megatrends Inc. 1.1 08/14/2019
Vendor:    Supermicro
Product:   Super Server
Serial:    0123456789
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
4x Micron 18ADF2G72AZ-2G6H1R 16 GB 2 rank 2667
```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Xeon E-2288G)

SPECrate®2017\_int\_base = 58.2

SPECrate®2017\_int\_peak = 61.2

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2019  
**Hardware Availability:** May-2019  
**Software Availability:** May-2019

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 523.xalanbmk\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base)  
531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Xeon E-2288G)

SPECrate®2017\_int\_base = 58.2

SPECrate®2017\_int\_peak = 61.2

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2019  
**Hardware Availability:** May-2019  
**Software Availability:** May-2019

### Compiler Version Notes (Continued)

Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
C++ | 523.xalancbmk\_r(peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

### Base Compiler Invocation

C benchmarks:  
icc -m64 -std=c11

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

### Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Xeon E-2288G)

SPECrate®2017\_int\_base = 58.2

SPECrate®2017\_int\_peak = 61.2

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2019  
**Hardware Availability:** May-2019  
**Software Availability:** May-2019

## Base Portability Flags (Continued)

```
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Xeon E-2288G)

SPECrate®2017\_int\_base = 58.2

SPECrate®2017\_int\_peak = 61.2

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2019  
**Hardware Availability:** May-2019  
**Software Availability:** May-2019

## Peak Compiler Invocation (Continued)

Fortran benchmarks:  
ifort -m64

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

525.x264_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

557.xz_r: basepeak = yes
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Supermicro

SuperWorkstation 5039C-T (X11SCA , Intel Xeon E-2288G)

SPECrate®2017\_int\_base = 58.2

SPECrate®2017\_int\_peak = 61.2

**CPU2017 License:** 001176  
**Test Sponsor:** Supermicro  
**Tested by:** Supermicro

**Test Date:** Nov-2019  
**Hardware Availability:** May-2019  
**Software Availability:** May-2019

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: basepeak = yes

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Default-Platform-Flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-08 07:12:07-0500.

Report generated on 2019-11-26 12:55:20 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-26.