



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55


Test Date: Nov-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

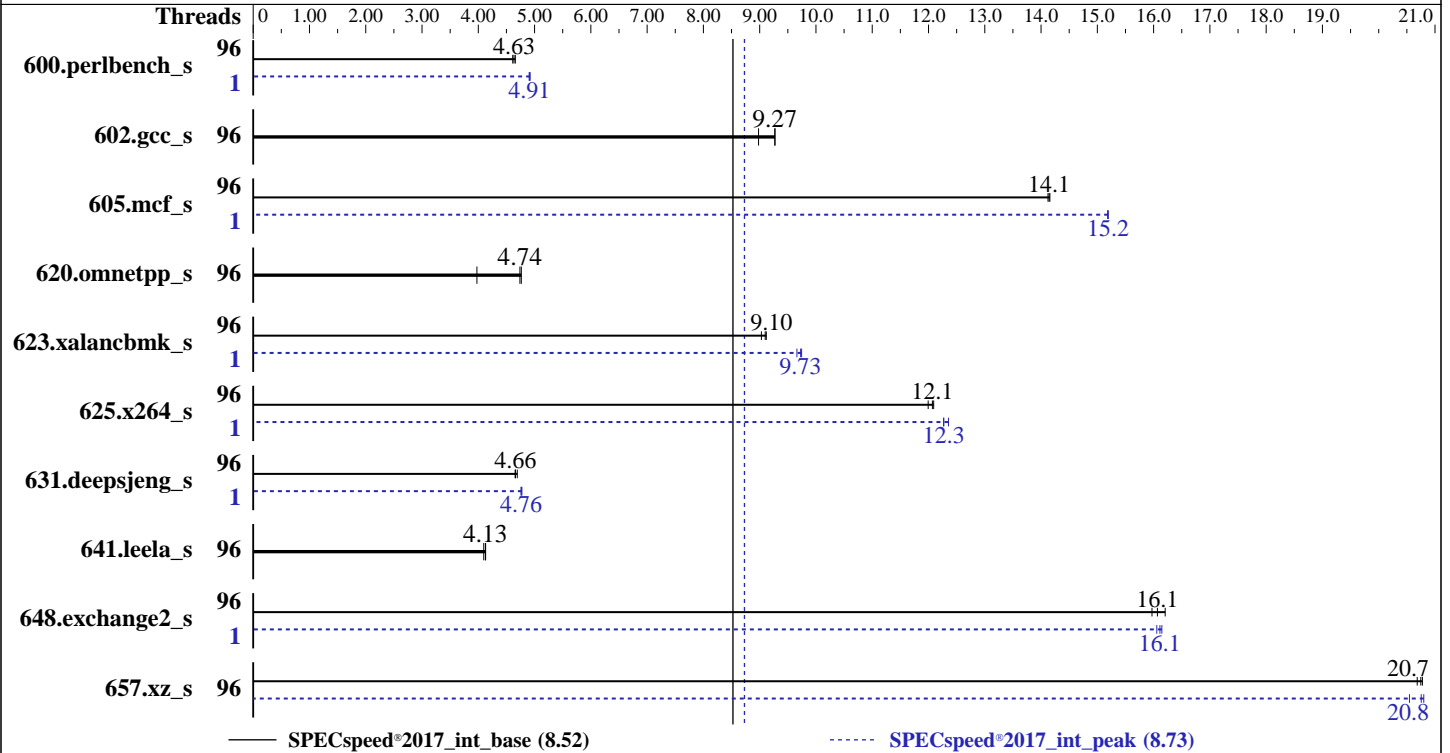

Hardware

CPU Name: AMD EPYC 7642
 Max MHz: 3300
 Nominal: 2300
 Enabled: 96 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 16 MB shared / 3 cores
 Other: None
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 2 x 960 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1
 kernel 4.12.14-195-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: Yes
 Firmware: Version 1.2.5 released Nov-2019
 File System: xfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECSpeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	96	381	4.66	383	4.63	385	4.61	1	362	4.90	361	4.92	361	4.91
602.gcc_s	96	443	8.98	429	9.27	430	9.27	96	443	8.98	429	9.27	430	9.27
605.mcf_s	96	334	14.1	333	14.2	334	14.1	1	311	15.2	311	15.2	311	15.2
620.omnetpp_s	96	342	4.76	410	3.98	344	4.74	96	342	4.76	410	3.98	344	4.74
623.xalancbmk_s	96	157	9.03	155	9.12	156	9.10	1	145	9.75	147	9.66	146	9.73
625.x264_s	96	146	12.1	147	12.0	146	12.1	1	143	12.4	144	12.3	144	12.3
631.deepsjeng_s	96	308	4.65	305	4.69	307	4.66	1	300	4.78	301	4.76	301	4.76
641.leela_s	96	413	4.13	416	4.10	413	4.13	96	413	4.13	416	4.10	413	4.13
648.exchange2_s	96	183	16.1	184	16.0	181	16.2	1	182	16.1	182	16.1	183	16.1
657.xz_s	96	298	20.7	299	20.7	298	20.8	96	301	20.5	298	20.8	297	20.8

SPECSpeed®2017_int_base = **8.52**

SPECSpeed®2017_int_peak = **8.73**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-191"

LD_LIBRARY_PATH =

"/root/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/64;/root/cpu2017-1.1.0/amd_speed_aocc200_rome_C_lib/32:"

MALLOC_CONF = "retain:true"

OMP_DYNAMIC = "false"

OMP_SCHEDULE = "static"

OMP_STACKSIZE = "128M"

OMP_THREAD_LIMIT = "192"

Environment variables set by runcpu during the 600.perlbench_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

GOMP_CPU_AFFINITY = "0"

OMP_STACKSIZE = "128M"

Environment variables set by runcpu during the 625.x264_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:

GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:

GOMP_CPU_AFFINITY = "0-95"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

General Notes (Continued)

jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS settings:

- NUMA Nodes Per Socket set to 4
- CCX as NUMA Domain set to Enabled
- System Profile set to Custom
- CPU Power Management set to Maximum Performance
- Memory Frequency set to Maximum Performance
- Turbo Boost Enabled
- Cstates set to Enabled
- Memory Patrol Scrub Disabled
- Memory Refresh Rate set to 1x
- PCI ASPM L1 Link Power Management Disabled
- Determinism Slider set to Power Determinism
- Efficiency Optimized Mode Disabled
- Memory Interleaving set to Disabled

Sysinfo program /root/cpu2017-1.1.0/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on linux-g3ob Tue Nov 19 23:58:41 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : AMD EPYC 7642 48-Core Processor
 2 "physical id"s (chips)
192 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 48
  siblings  : 96
physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
32 33 34 36 37 38 40 41 42 44 45 46 48 49 50 52 53 54 56 57 58 60 61 62
physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
32 33 34 36 37 38 40 41 42 44 45 46 48 49 50 52 53 54 56 57 58 60 61 62

```

From lscpu:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

Address sizes: 43 bits physical, 48 bits virtual
CPU(s): 192
On-line CPU(s) list: 0-191
Thread(s) per core: 2
Core(s) per socket: 48
Socket(s): 2
NUMA node(s): 32
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7642 48-Core Processor
Stepping: 0
CPU MHz: 2295.709
BogoMIPS: 4591.41
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-2,96-98
NUMA node1 CPU(s): 3-5,99-101
NUMA node2 CPU(s): 6-8,102-104
NUMA node3 CPU(s): 9-11,105-107
NUMA node4 CPU(s): 12-14,108-110
NUMA node5 CPU(s): 15-17,111-113
NUMA node6 CPU(s): 18-20,114-116
NUMA node7 CPU(s): 21-23,117-119
NUMA node8 CPU(s): 24-26,120-122
NUMA node9 CPU(s): 27-29,123-125
NUMA node10 CPU(s): 30-32,126-128
NUMA node11 CPU(s): 33-35,129-131
NUMA node12 CPU(s): 36-38,132-134
NUMA node13 CPU(s): 39-41,135-137
NUMA node14 CPU(s): 42-44,138-140
NUMA node15 CPU(s): 45-47,141-143
NUMA node16 CPU(s): 48-50,144-146
NUMA node17 CPU(s): 51-53,147-149
NUMA node18 CPU(s): 54-56,150-152
NUMA node19 CPU(s): 57-59,153-155
NUMA node20 CPU(s): 60-62,156-158
NUMA node21 CPU(s): 63-65,159-161
NUMA node22 CPU(s): 66-68,162-164
NUMA node23 CPU(s): 69-71,165-167
NUMA node24 CPU(s): 72-74,168-170
NUMA node25 CPU(s): 75-77,171-173
NUMA node26 CPU(s): 78-80,174-176
NUMA node27 CPU(s): 81-83,177-179

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

NUMA node28 CPU(s): 84-86,180-182

NUMA node29 CPU(s): 87-89,183-185

NUMA node30 CPU(s): 90-92,186-188

NUMA node31 CPU(s): 93-95,189-191

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

/proc/cpuinfo cache data
cache size : 512 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 32 nodes (0-31)
node 0 cpus: 0 1 2 96 97 98
node 0 size: 15548 MB
node 0 free: 15431 MB
node 1 cpus: 3 4 5 99 100 101
node 1 size: 16126 MB
node 1 free: 16038 MB
node 2 cpus: 6 7 8 102 103 104
node 2 size: 16126 MB
node 2 free: 16030 MB
node 3 cpus: 9 10 11 105 106 107
node 3 size: 16125 MB
node 3 free: 16018 MB
node 4 cpus: 12 13 14 108 109 110
node 4 size: 16126 MB
node 4 free: 16040 MB
node 5 cpus: 15 16 17 111 112 113
node 5 size: 16097 MB
node 5 free: 16007 MB
node 6 cpus: 18 19 20 114 115 116
node 6 size: 16126 MB
node 6 free: 16035 MB
node 7 cpus: 21 22 23 117 118 119
node 7 size: 16125 MB
node 7 free: 16030 MB
node 8 cpus: 24 25 26 120 121 122
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

node 8 size: 16126 MB
node 8 free: 16042 MB
node 9 cpus: 27 28 29 123 124 125
node 9 size: 16126 MB
node 9 free: 16040 MB
node 10 cpus: 30 31 32 126 127 128
node 10 size: 16126 MB
node 10 free: 16034 MB
node 11 cpus: 33 34 35 129 130 131
node 11 size: 16125 MB
node 11 free: 16038 MB
node 12 cpus: 36 37 38 132 133 134
node 12 size: 16126 MB
node 12 free: 16016 MB
node 13 cpus: 39 40 41 135 136 137
node 13 size: 16126 MB
node 13 free: 16040 MB
node 14 cpus: 42 43 44 138 139 140
node 14 size: 16126 MB
node 14 free: 16041 MB
node 15 cpus: 45 46 47 141 142 143
node 15 size: 16113 MB
node 15 free: 16026 MB
node 16 cpus: 48 49 50 144 145 146
node 16 size: 16126 MB
node 16 free: 16041 MB
node 17 cpus: 51 52 53 147 148 149
node 17 size: 16126 MB
node 17 free: 16045 MB
node 18 cpus: 54 55 56 150 151 152
node 18 size: 16126 MB
node 18 free: 16045 MB
node 19 cpus: 57 58 59 153 154 155
node 19 size: 16125 MB
node 19 free: 16040 MB
node 20 cpus: 60 61 62 156 157 158
node 20 size: 16126 MB
node 20 free: 15975 MB
node 21 cpus: 63 64 65 159 160 161
node 21 size: 16126 MB
node 21 free: 15799 MB
node 22 cpus: 66 67 68 162 163 164
node 22 size: 16126 MB
node 22 free: 15864 MB
node 23 cpus: 69 70 71 165 166 167
node 23 size: 16125 MB
node 23 free: 16016 MB

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

node 24 cpus: 72 73 74 168 169 170
node 24 size: 16126 MB
node 24 free: 16041 MB
node 25 cpus: 75 76 77 171 172 173
node 25 size: 16126 MB
node 25 free: 16036 MB
node 26 cpus: 78 79 80 174 175 176
node 26 size: 16126 MB
node 26 free: 16042 MB
node 27 cpus: 81 82 83 177 178 179
node 27 size: 16125 MB
node 27 free: 16040 MB
node 28 cpus: 84 85 86 180 181 182
node 28 size: 16126 MB
node 28 free: 16023 MB
node 29 cpus: 87 88 89 183 184 185
node 29 size: 16126 MB
node 29 free: 16011 MB
node 30 cpus: 90 91 92 186 187 188
node 30 size: 16126 MB
node 30 free: 15962 MB
node 31 cpus: 93 94 95 189 190 191
node 31 size: 16124 MB
node 31 free: 15996 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
20 21 22 23 24 25 26 27 28 29 30 31
0: 10 11 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
1: 11 10 11 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
2: 11 11 10 11 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
3: 11 11 11 10 12 12 12 12 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
4: 12 12 12 12 10 11 11 11 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
5: 12 12 12 12 11 10 11 11 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
6: 12 12 12 12 11 11 10 11 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
7: 12 12 12 12 11 11 11 10 12 12 12 12 12 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
8: 12 12 12 12 12 12 12 12 12 10 11 11 11 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32
9: 12 12 12 12 12 12 12 12 12 11 10 11 11 12 12 12 32 32 32 32
32 32 32 32 32 32 32 32 32 32 32 32 32

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

```

10:  12  12  12  12  12  12  12  12  12  11  11  10  11  12  12  12  12  32  32  32  32
32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32
11:  12  12  12  12  12  12  12  12  12  12  11  11  11  10  12  12  12  12  32  32  32  32
32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32
12:  12  12  12  12  12  12  12  12  12  12  12  12  12  12  10  11  11  11  32  32  32  32
32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32
13:  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  11  10  11  11  32  32  32  32
32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32
14:  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  11  11  10  11  32  32  32  32
32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32
15:  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  11  11  11  10  32  32  32  32
32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32
16:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  10  11  11  11
12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12
17:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  10  11  11
12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12
18:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  10  11
12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12
19:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  11  11  11  10
12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12
20:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
10  11  11  11  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12
21:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
11  10  11  11  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12
22:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
11  11  10  11  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12
23:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
11  11  11  10  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12  12
24:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  10  11  11  11  12  12  12  12  12  12  12  12  12  12  12  12  12
25:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  11  10  11  11  12  12  12  12  12  12  12  12  12  12  12  12  12
26:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  11  11  10  11  12  12  12  12  12  12  12  12  12  12  12  12  12
27:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  11  11  11  10  12  12  12  12  12  12  12  12  12  12  12  12  12
28:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  12  12  12  12  10  11  11  11  11  11  11  11  11  11  11  11  11
29:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  12  12  12  12  11  10  11  11  11  11  11  11  11  11  11  11  11
30:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  12  12  12  12  11  11  10  11  11  11  11  11  11  11  11  11  11
31:  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  12  12  12  12
12  12  12  12  12  12  12  12  11  11  11  10  11  11  11  11  11  11  11  11  11

```

From /proc/meminfo
MemTotal: 527796228 kB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Platform Notes (Continued)

HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault): Not affected
Microarchitectural Data Sampling: Not affected
CVE-2017-5754 (Meltdown): Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: conditional, RSB
filling
```

run-level 5 Nov 19 10:55

SPEC is set to: /root/cpu2017-1.1.0

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 xfs 440G 36G 405G 8% /
```

From /sys/devices/virtual/dmi/id

```
BIOS: Dell Inc. 1.2.5 11/14/2019
Vendor: Dell Inc.
Product: PowerEdge R7525
Product Family: PowerEdge
Serial: 1234567
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Nov-2019
Hardware Availability: Feb-2020
Software Availability: Aug-2019

Platform Notes (Continued)

Memory:

7x 802C80B3802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
8x 802C869D802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
1x 80AD80B380AD HMA84GR7CJR4N-XN 32 GB 2 rank 3200
16x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====
```

```
=====  
C++    | 623.xalanbmk_s(peak)  
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====
```

```
=====  
C++    | 620.omnetpp_s(base, peak) 623.xalanbmk_s(base)  
      | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)  
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
=====
```

```
=====  
C++    | 623.xalanbmk_s(peak)  
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Compiler Version Notes (Continued)

```
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

```
====
C++      | 620.omnetpp_s(base, peak) 623.xalanbmk_s(base)
          | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

```
====
Fortran  | 648.exchange2_s(base, peak)
-----
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----
```

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Date: Nov-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Base Portability Flags (Continued)

```
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Base Other Flags

C benchmarks:

-Wno-return-type

C++ benchmarks:

-Wno-return-type

Fortran benchmarks:

-Wno-return-type

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

```

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

600.perlbench_s (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

602.gcc_s:basepeak = yes

```
605.mcf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

625.x264_s: Same as 600.perlbench_s

```
657.xz_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Date: Nov-2019

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

657.xz_s (continued):

```
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

620.omnetpp_s: basepeak = yes

```
623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc
```

```
631.deepsjeng_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

641.leela_s: basepeak = yes

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 8.52

PowerEdge R7525 (AMD EPYC 7642, 2.30 GHz)

SPECspeed®2017_int_peak = 8.73

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2019

Hardware Availability: Feb-2020

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

-lflang

Peak Other Flags

C benchmarks:

-Wno-return-type

C++ benchmarks (except as noted below):

-Wno-return-type

623.xalancbmk_s: -Wno-return-type

-L/sppo/dev/cpu2017/v110/amd_speed_aocc200_rome_C_lib/32

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-speed-Dell.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE7.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-20 00:58:41-0500.

Report generated on 2019-12-26 11:33:23 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-24.