



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR645 2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98

SPECspeed®2017_int_energy_base = 44.8

SPECspeed®2017_int_peak = 9.20

SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2020

Hardware Availability: Jun-2020

Software Availability: Nov-2019

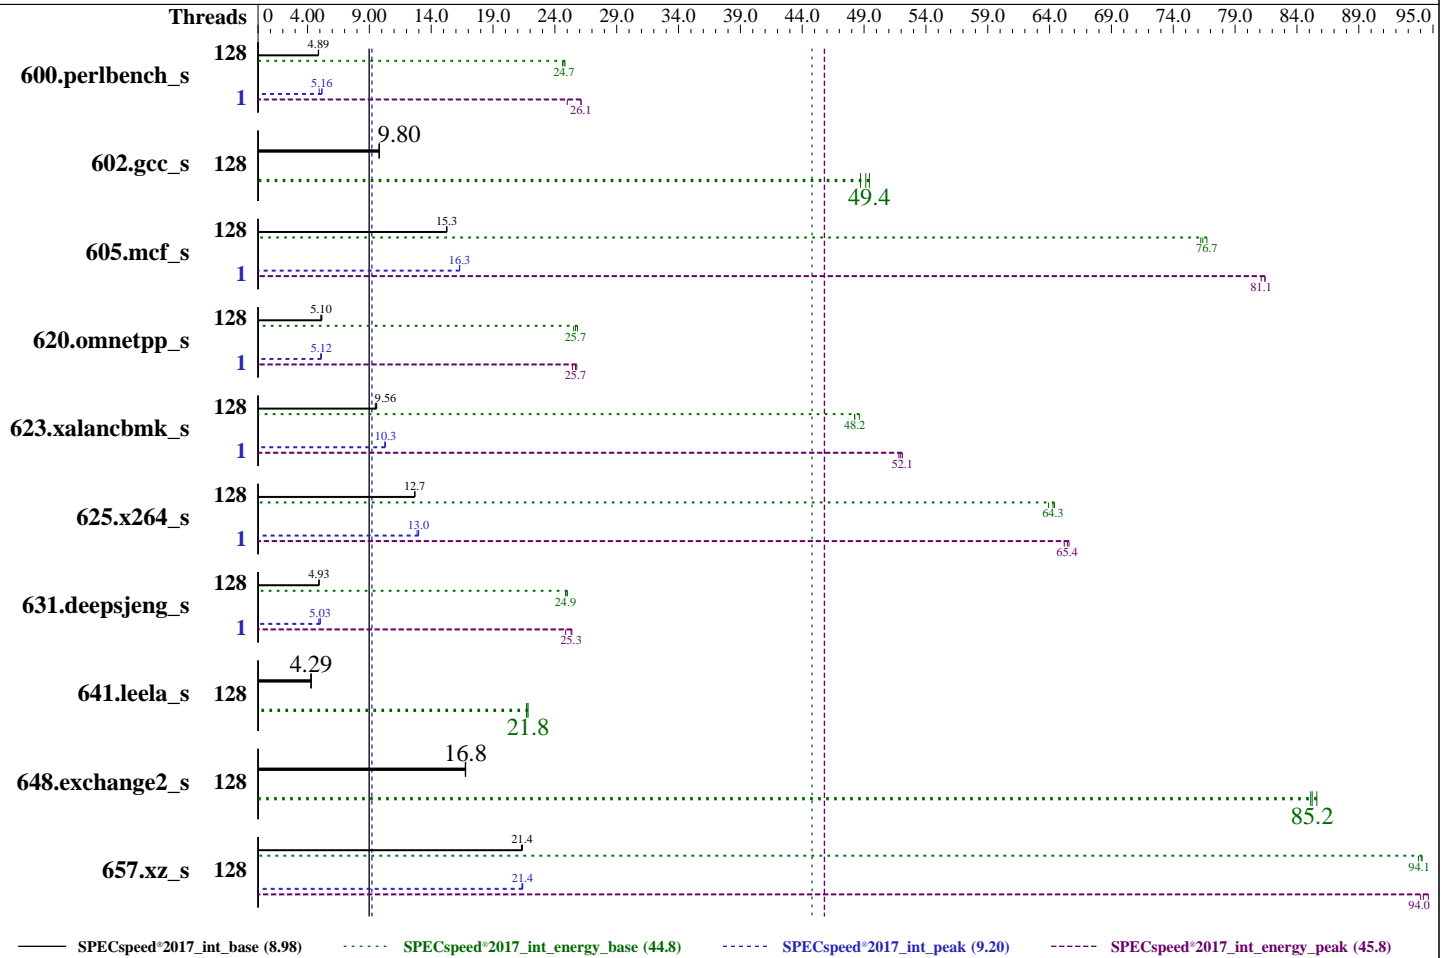

Hardware	Software
CPU Name: AMD EPYC 7742	OS: Red Hat Enterprise Linux 8.1 (Ootpa)
Max MHz: 3400	Kernel 4.18.0-147.el8.x86_64
Nominal: 2250	C/C++/Fortran: Version 2.0.0 of AOCC
Enabled: 128 cores, 2 chips, 2 threads/core	Compiler: Yes
Orderable: 1,2 chips	Parallel: Yes
Cache L1: 32 KB I + 32 KB D on chip per core	Firmware: Lenovo BIOS Version D8E105F 1.00 released Mar-2020
L2: 512 KB I+D on chip per core	File System: xfs
L3: 256 MB I+D on chip per chip, 16 MB shared / 4 cores	System State: Run level 3 (multi-user)
Other: None	Base Pointers: 64-bit
Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R)	Peak Pointers: 32/64-bit
Storage: 1 x 960 GB SATA SSD	Other: jemalloc: jemalloc memory allocator library v5.1.0
Other: None	Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology ThinkSystem SR645 2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98
SPECspeed®2017_int_energy_base = 44.8
SPECspeed®2017_int_peak = 9.20
SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Power

Max. Power (W): 633.67
Idle Power (W): 121.38
Min. Temperature (C): 20.88
Elevation (m): 43
Line Standard: 220 V / 50 Hz / 1 phase / 1 wire
Provisioning: Line-powered

Power Settings

Management FW: Version 2.00 of D8BT05U
Memory Mode: Normal

Power-Relevant Hardware

Power Supply: 1 x 1100 W (non-redundant)
Details: ThinkSystem 1100W Platinum Power Supply SP57A14700
Backplane: 8 x 2.5-inch HDD back plane
Other Storage: RAID 930-8i 2GB Flash PCIe 12Gb Adapter
Storage Model #: 6FC81AB0
NICs Installed: 1 x ThinkSystem Ethernet 4-port Adaptor @ 1 Gb
NICs Enabled (FW/OS): 4 / 1
NICs Connected/Speed: 1 @ 1 Gb
Other HW Model #: 8 x High Performance fans

Power Analyzer

Power Analyzer: WIN:8888
Hardware Vendor: YOKOGAWA, Inc.
Model: YokogawaWT310E
Serial Number: C3UG05013E
Input Connection: Default
Metrology Institute: CNAS
Calibration By: China CEPREI Laboratory
Calibration Label: 1GA19013841-0005
Calibration Date: 27-Sep-2019
PTDaemon™ Version: 1.9.1 (a2d19f26; 2019-07-17)
Setup Description: Connected to PSU1
Current Ranges Used: 2.5A
Voltage Range Used: 300V

Temperature Meter

Temperature Meter: WIN:8889
Hardware Vendor: Digi International, Inc.
Model: DigiWATCHPORT_H
Serial Number: COM1
Input Connection: USB
PTDaemon Version: 1.9.1 (a2d19f26; 2019-07-17)
Setup Description: 50 mm in front of SUT main intake

Base Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	128	363	4.89	77.6	24.8	214	216	363	4.89	77.8	24.7	214	217	364	4.87	78.2	24.6	215	221
602.gcc_s	128	406	9.80	87.6	49.4	216	224	405	9.82	88.1	49.1	217	228	407	9.78	88.9	48.7	218	229
605.mcf_s	128	310	15.3	67.1	76.7	217	222	309	15.3	67.6	76.2	219	231	310	15.2	67.4	76.4	218	222
620.omnetpp_s	128	321	5.08	69.5	25.5	217	218	320	5.10	69.1	25.7	216	217	316	5.16	68.7	25.8	218	218
623.xalancbmk_s	128	149	9.48	31.9	48.2	213	214	148	9.60	31.6	48.6	214	215	148	9.56	31.9	48.2	215	216
625.x264_s	128	139	12.7	29.8	64.4	214	215	139	12.7	29.9	64.3	214	215	139	12.7	30.0	63.9	215	216
631.deepsjeng_s	128	292	4.91	62.6	24.9	214	225	290	4.94	62.3	25.0	214	232	291	4.93	62.7	24.9	216	225
641.leela_s	128	398	4.29	85.1	21.7	214	215	398	4.29	84.6	21.8	213	213	398	4.29	85.0	21.7	214	215
648.exchange2_s	128	175	16.8	37.6	85.1	214	215	175	16.8	37.4	85.6	213	214	175	16.8	37.5	85.2	214	215
657.xz_s	128	289	21.4	71.6	94.1	247	631	290	21.3	71.8	93.8	247	631	289	21.4	71.5	94.1	247	632

SPECspeed®2017_int_base = 8.98

SPECspeed®2017_int_energy_base = 44.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECSpeed®2017_int_base = 8.98
SPECSpeed®2017_int_energy_base = 44.8
SPECSpeed®2017_int_peak = 9.20
SPECSpeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Peak Results Table

Benchmark	Threads	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power	Seconds	Ratio	Energy (kJ)	Energy Ratio	Average Power	Maximum Power
600.perlbench_s	1	359	4.95	77.0	25.0	215	218	344	5.16	73.7	26.1	215	218	344	5.16	73.8	26.1	215	218
602.gcc_s	128	406	9.80	87.6	49.4	216	224	405	9.82	88.1	49.1	217	228	407	9.78	88.9	48.7	218	229
605.mcf_s	1	290	16.3	63.3	81.4	218	230	290	16.3	63.3	81.4	218	231	290	16.3	63.5	81.1	219	231
620.omnetpp_s	1	322	5.06	69.8	25.4	217	218	318	5.12	68.9	25.8	216	218	319	5.12	69.1	25.7	217	218
623.xalanbmk_s	1	138	10.3	29.6	52.0	215	216	138	10.3	29.5	52.1	214	215	138	10.3	29.7	51.8	215	216
625.x264_s	1	136	13.0	29.3	65.4	216	217	137	12.9	29.4	65.2	215	216	136	13.0	29.3	65.6	215	217
631.deepsjeng_s	1	285	5.03	61.5	25.3	216	233	292	4.91	62.6	24.9	215	230	285	5.03	61.4	25.4	215	232
641.leela_s	128	398	4.29	85.1	21.7	214	215	398	4.29	84.6	21.8	213	213	398	4.29	85.0	21.7	214	215
648.exchange2_s	128	175	16.8	37.6	85.1	214	215	175	16.8	37.4	85.6	213	214	175	16.8	37.5	85.2	214	215
657.xz_s	128	289	21.4	71.6	94.0	248	634	290	21.3	71.5	94.2	247	631	289	21.4	71.1	94.6	246	628

SPECSpeed®2017_int_peak = 9.20

SPECSpeed®2017_int_energy_peak = 45.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98
SPECspeed®2017_int_energy_base = 44.8
SPECspeed®2017_int_peak = 9.20
SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-255"
LD_LIBRARY_PATH =
 "/home/cpu2017-1.1.0-amd-rome-aocc200-C1/amd_speed_aocc200_rome_C_lib/64
 ;/home/cpu2017-1.1.0-amd-rome-aocc200-C1/amd_speed_aocc200_rome_C_lib/32
 :"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "256"

Environment variables set by runcpu during the 600.perlbench_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "0"
OMP_STACKSIZE = "128M"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-127"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98
SPECspeed®2017_int_energy_base = 44.8
SPECspeed®2017_int_peak = 9.20
SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

General Notes (Continued)

is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.
jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS settings:

Choose Operating Mode set to Custom Mode
Determinism Slider set to Power
cTDP set to Manual
cTDP Manual set to 240
Memory Speed set to 3200MHz
Efficiency Mode set to Auto
NUMA nodes per socket set to NPS4
Zero Output set to Advanced Mode

Sysinfo program /home/cpu2017-1.1.0-amd-rome-aocc200-C1/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on localhost.localdomain Tue Apr 7 05:53:29 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7742 64-Core Processor
 2 "physical id"s (chips)
256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 64
siblings  : 128
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55 56 57 58 59 60 61 62 63
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98
SPECspeed®2017_int_energy_base = 44.8
SPECspeed®2017_int_peak = 9.20
SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Platform Notes (Continued)

From lscpu:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 256
On-line CPU(s) list: 0-255
Thread(s) per core: 2
Core(s) per socket: 64
Socket(s): 2
NUMA node(s): 8
Vendor ID: AuthenticAMD
CPU family: 23
Model: 49
Model name: AMD EPYC 7742 64-Core Processor
Stepping: 0
CPU MHz: 3136.401
CPU max MHz: 2250.0000
CPU min MHz: 1500.0000
BogoMIPS: 4491.86
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 16384K
NUMA node0 CPU(s): 0-15,128-143
NUMA node1 CPU(s): 16-31,144-159
NUMA node2 CPU(s): 32-47,160-175
NUMA node3 CPU(s): 48-63,176-191
NUMA node4 CPU(s): 64-79,192-207
NUMA node5 CPU(s): 80-95,208-223
NUMA node6 CPU(s): 96-111,224-239
NUMA node7 CPU(s): 112-127,240-255

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98
SPECspeed®2017_int_energy_base = 44.8
SPECspeed®2017_int_peak = 9.20
SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 128 129 130 131 132 133 134 135 136
137 138 139 140 141 142 143
node 0 size: 64282 MB
node 0 free: 64106 MB
node 1 cpus: 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 144 145 146 147 148 149
150 151 152 153 154 155 156 157 158 159
node 1 size: 64503 MB
node 1 free: 64210 MB
node 2 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 160 161 162 163 164 165
166 167 168 169 170 171 172 173 174 175
node 2 size: 64503 MB
node 2 free: 64312 MB
node 3 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 176 177 178 179 180 181
182 183 184 185 186 187 188 189 190 191
node 3 size: 64491 MB
node 3 free: 64059 MB
node 4 cpus: 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 192 193 194 195 196 197
198 199 200 201 202 203 204 205 206 207
node 4 size: 64503 MB
node 4 free: 64354 MB
node 5 cpus: 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 208 209 210 211 212 213
214 215 216 217 218 219 220 221 222 223
node 5 size: 64503 MB
node 5 free: 64362 MB
node 6 cpus: 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 224 225 226
227 228 229 230 231 232 233 234 235 236 237 238 239
node 6 size: 64503 MB
node 6 free: 64353 MB
node 7 cpus: 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 240 241
242 243 244 245 246 247 248 249 250 251 252 253 254 255
node 7 size: 64502 MB
node 7 free: 64310 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10 12 12 12 32 32 32 32
  1:  12 10 12 12 32 32 32 32
  2:  12 12 10 12 32 32 32 32
  3:  12 12 12 10 32 32 32 32
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECSpeed®2017_int_base = 8.98
SPECSpeed®2017_int_energy_base = 44.8
SPECSpeed®2017_int_peak = 9.20
SPECSpeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Platform Notes (Continued)

```
4: 32 32 32 32 10 12 12 12
5: 32 32 32 32 12 10 12 12
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10
```

From /proc/meminfo

```
MemTotal:      528174676 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"
```

```
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swapgs barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: conditional, RSB
filling
```

run-level 3 Apr 7 05:51

```
SPEC is set to: /home/cpu2017-1.1.0-amd-rome-aocc200-C1
Filesystem      Type      Size      Used      Avail      Use%      Mounted on
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98
SPECspeed®2017_int_energy_base = 44.8
SPECspeed®2017_int_peak = 9.20
SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Platform Notes (Continued)

/dev/sda2 xfs 838G 53G 785G 7% /home

```
From /sys/devices/virtual/dmi/id
  BIOS:      Lenovo D8E105F-1.00 03/19/2020
  Vendor:    Lenovo
  Product:   ThinkSystem SR645 MB
  Product Family: ThinkSystem
  Serial:    1234567890
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
  16x Samsung M393A4K40DB3-CWE 32 kB 2 rank 3200
  16x Unknown Unknown
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====
```

```
=====
C++   | 623.xalancbmk_s(peak)
=====
```

```
AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
=====
```

```
=====
C++   | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
=====
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98
SPECspeed®2017_int_energy_base = 44.8
SPECspeed®2017_int_peak = 9.20
SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Compiler Version Notes (Continued)

| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 623.xalancbmk_s(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base)
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
Fortran | 648.exchange2_s(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98
SPECspeed®2017_int_energy_base = 44.8
SPECspeed®2017_int_peak = 9.20
SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-fremap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang

C++ benchmarks:
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98
SPECspeed®2017_int_energy_base = 44.8
SPECspeed®2017_int_peak = 9.20
SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2020

Hardware Availability: Jun-2020

Software Availability: Nov-2019

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -DUSE_OPENMP
-fopenmp=libomp -lomp -lpthread -ldl -lmvec -lamdlibm -ljemalloc
-lflang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks:

```
-Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98
SPECspeed®2017_int_energy_base = 44.8
SPECspeed®2017_int_peak = 9.20
SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Peak Compiler Invocation (Continued)

Fortran benchmarks:
flang

Peak Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98
SPECspeed®2017_int_energy_base = 44.8
SPECspeed®2017_int_peak = 9.20
SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Apr-2020

Hardware Availability: Jun-2020

Software Availability: Nov-2019

Peak Optimization Flags (Continued)

602.gcc_s: basepeak = yes

```
605.mcf_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -lmvec -lamdlibm -fopenmp=libomp -lomp
-lpthread -ldl -ljemalloc -lflang
```

625.x264_s: Same as 600.perlbench_s

```
657.xz_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -DSPEC_OPENMP -fopenmp
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl
-lmvec -lamdlibm -ljemalloc -lflang
```

C++ benchmarks:

```
620.omnetpp_s: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98
SPECspeed®2017_int_energy_base = 44.8
SPECspeed®2017_int_peak = 9.20
SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

Peak Optimization Flags (Continued)

620.omnetpp_s (continued):

```
-mllvm -vector-library=LIBMVEC  
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl  
-lmvec -lamdlibm -ljemalloc -lflang
```

623.xalancbmk_s: -m32 -flto -Wl,-mllvm -Wl,-function-specialize

```
-Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver2 -flv-function-specialization  
-mllvm -unroll-threshold=100  
-mllvm -enable-partial-unswitch  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -vector-library=LIBMVEC  
-mllvm -inline-threshold=1000 -DSPEC_OPENMP -fopenmp  
-DUSE_OPENMP -fopenmp=libomp -lomp -lpthread -ldl  
-ljemalloc
```

631.deepsjeng_s: Same as 620.omnetpp_s

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

```
-Wno-return-type
```

C++ benchmarks (except as noted below):

```
-Wno-return-type
```

623.xalancbmk_s: -Wno-return-type

```
-L/sppo/dev/cpu2017/v110/amd_speed_aocc200_rome_C_lib/32
```

Fortran benchmarks:

```
-Wno-return-type
```




SPEC CPU®2017 Integer Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology
ThinkSystem SR645
2.25 GHz, AMD EPYC 7742

SPECspeed®2017_int_base = 8.98
SPECspeed®2017_int_energy_base = 44.8
SPECspeed®2017_int_peak = 9.20
SPECspeed®2017_int_energy_peak = 45.8

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Apr-2020
Hardware Availability: Jun-2020
Software Availability: Nov-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-1.html>
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-J.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1-1.xml>
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-J.xml>

PTDaemon, SPEC CPU, and SPECspeed are trademarks or registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-06 17:53:29-0400.
Report generated on 2020-05-05 11:00:35 by CPU2017 PDF formatter v6255.
Originally published on 2020-05-05.