



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 222

PowerEdge C6420 (Intel Xeon Gold 6246R, 3.40 GHz)

SPECrate®2017_int_peak = 229

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Feb-2020

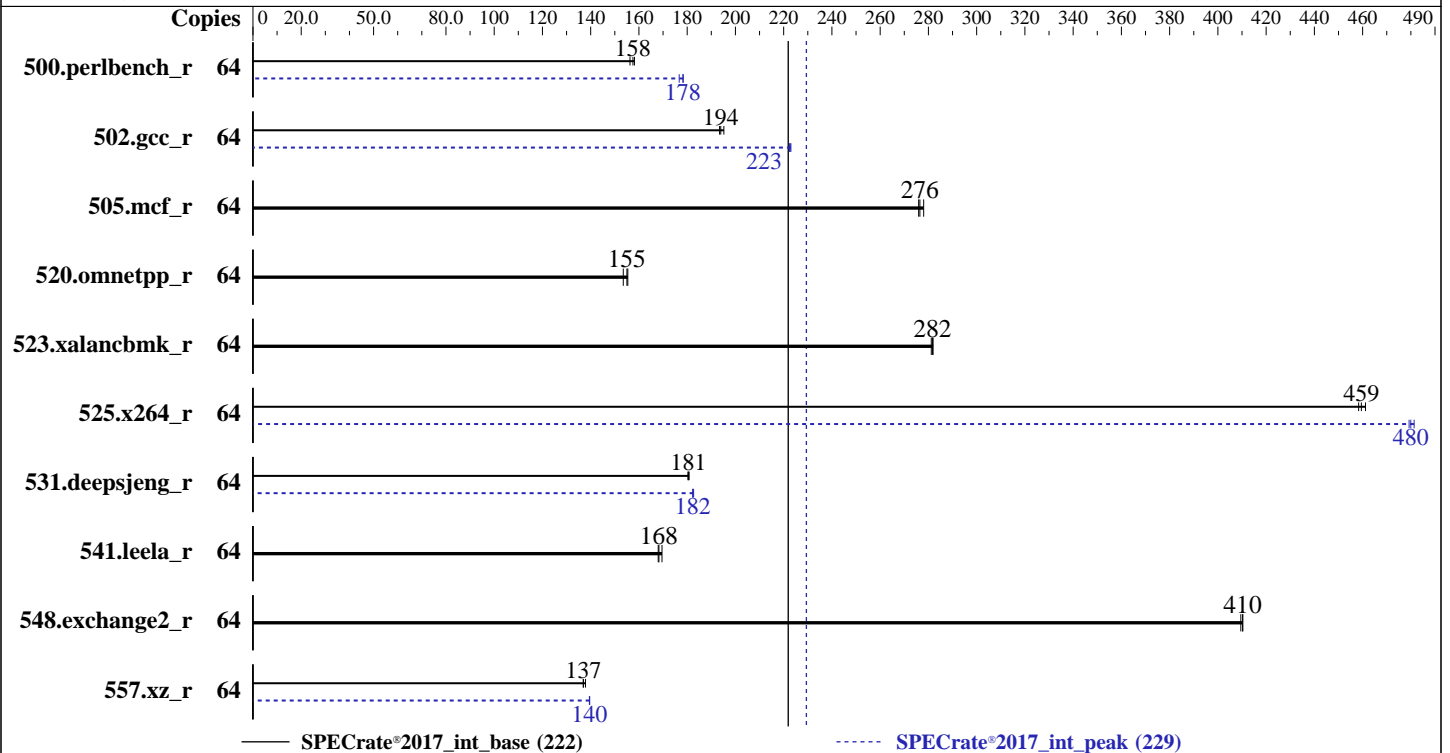

Hardware

CPU Name: Intel Xeon Gold 6246R
 Max MHz: 4100
 Nominal: 3400
 Enabled: 32 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx8 PC4-2933V-R, running at 2933)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: CentOS Linux 8.1.1911
 kernel 4.18.0-147.5.1.el8_1.x86_64
 Compiler: C/C++: Version 19.0.5.281 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.5.281 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Version 2.7.3 released Mar-2020
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 222

PowerEdge C6420 (Intel Xeon Gold 6246R, 3.40 GHz)

SPECrate®2017_int_peak = 229

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Feb-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	644	158	<u>647</u>	<u>158</u>	652	156	64	571	178	<u>572</u>	<u>178</u>	577	177
502.gcc_r	64	469	193	<u>467</u>	<u>194</u>	464	195	64	406	223	<u>407</u>	<u>223</u>	407	222
505.mcf_r	64	375	276	372	278	<u>374</u>	<u>276</u>	64	375	276	372	278	<u>374</u>	<u>276</u>
520.omnetpp_r	64	540	155	<u>542</u>	<u>155</u>	547	154	64	540	155	<u>542</u>	<u>155</u>	547	154
523.xalancbmk_r	64	240	282	240	281	<u>240</u>	<u>282</u>	64	240	282	240	281	<u>240</u>	<u>282</u>
525.x264_r	64	244	458	243	461	<u>244</u>	<u>459</u>	64	233	481	234	479	<u>233</u>	<u>480</u>
531.deepsjeng_r	64	407	180	<u>406</u>	<u>181</u>	406	181	64	<u>402</u>	<u>182</u>	402	182	402	183
541.leela_r	64	625	170	631	168	<u>630</u>	<u>168</u>	64	625	170	631	168	<u>630</u>	<u>168</u>
548.exchange2_r	64	409	410	<u>409</u>	<u>410</u>	409	410	64	409	410	<u>409</u>	<u>410</u>	409	410
557.xz_r	64	505	137	<u>505</u>	<u>137</u>	501	138	64	<u>495</u>	<u>140</u>	496	139	495	140

SPECrate®2017_int_base = 222

SPECrate®2017_int_peak = 229

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/dev/shm/cpu2017/lib/intel64:/dev/shm/cpu2017/lib/ia32:/dev/shm/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 222

PowerEdge C6420 (Intel Xeon Gold 6246R, 3.40 GHz)

SPECrate®2017_int_peak = 229

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Feb-2020

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS settings:

Sub NUMA Cluster enabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

ClE disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub set to standard

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

UPI Prefetch enabled

LLC Prefetch disabled

Dead Line LLC Alloc enabled

Directory AtoS disabled

Sysinfo program /dev/shm/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost.localdomain Mon Apr 27 22:30:45 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6246R CPU @ 3.40GHz
```

```
2 "physical id"s (chips)
```

```
64 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 222

PowerEdge C6420 (Intel Xeon Gold 6246R, 3.40 GHz)

SPECrate®2017_int_peak = 229

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Feb-2020

Platform Notes (Continued)

```
cpu cores : 16
siblings  : 32
physical 0: cores 0 1 2 6 12 13 16 17 18 19 21 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 13 16 17 18 19 21 24 28 29
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:   0-63
Thread(s) per core:    2
Core(s) per socket:    16
Socket(s):             2
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6246R CPU @ 3.40GHz
Stepping:              7
CPU MHz:               1989.150
CPU max MHz:           4100.0000
CPU min MHz:           1200.0000
BogoMIPS:              6800.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              36608K
NUMA node0 CPU(s):    0,4,6,12,16,20,24,28,32,36,38,44,48,52,56,60
NUMA node1 CPU(s):    1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61
NUMA node2 CPU(s):    2,8,10,14,18,22,26,30,34,40,42,46,50,54,58,62
NUMA node3 CPU(s):    3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63
```

```
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities
```

/proc/cpuinfo cache data

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 222

PowerEdge C6420 (Intel Xeon Gold 6246R, 3.40 GHz)

SPECrate®2017_int_peak = 229

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Feb-2020

Platform Notes (Continued)

cache size : 36608 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 4 6 12 16 20 24 28 32 36 38 44 48 52 56 60

node 0 size: 95305 MB

node 0 free: 95124 MB

node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61

node 1 size: 96764 MB

node 1 free: 95992 MB

node 2 cpus: 2 8 10 14 18 22 26 30 34 40 42 46 50 54 58 62

node 2 size: 96764 MB

node 2 free: 80961 MB

node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63

node 3 size: 96738 MB

node 3 free: 96431 MB

node distances:

node 0 1 2 3

0: 10 21 11 21

1: 21 10 21 11

2: 11 21 10 21

3: 21 11 21 10

From /proc/meminfo

MemTotal: 394827724 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

centos-release: CentOS Linux release 8.1.1911 (Core)

centos-release-upstream: Derived from Red Hat Enterprise Linux 8.1 (Source)

os-release:

NAME="CentOS Linux"

VERSION="8 (Core)"

ID="centos"

ID_LIKE="rhel fedora"

VERSION_ID="8"

PLATFORM_ID="platform:el8"

PRETTY_NAME="CentOS Linux 8 (Core)"

ANSI_COLOR="0;31"

redhat-release: CentOS Linux release 8.1.1911 (Core)

system-release: CentOS Linux release 8.1.1911 (Core)

system-release-cpe: cpe:/o:centos:centos:8

uname -a:

Linux localhost.localdomain 4.18.0-147.5.1.el8_1.x86_64 #1 SMP Wed Feb 5 02:00:39 UTC

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 222

PowerEdge C6420 (Intel Xeon Gold 6246R, 3.40 GHz)

SPECrate®2017_int_peak = 229

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Feb-2020

Platform Notes (Continued)

2020 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

itlb_multihit:	Processor vulnerable
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
tsx_async_abort:	Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Apr 27 17:02

SPEC is set to: /dev/shm/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	189G	7.6G	181G	4%	/dev/shm

From /sys/devices/virtual/dmi/id

```

BIOS:      Dell Inc.  2.7.3 03/25/2020
Vendor:    Dell Inc.
Product:   PowerEdge C6420
Product Family: PowerEdge
Serial:    1234567

```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```

8x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
1x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
3x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
4x Not Specified Not Specified

```

(End of data from sysinfo program)

Compiler Version Notes

```

=====
C      | 502.gcc_r(peak)
=====

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 222

PowerEdge C6420 (Intel Xeon Gold 6246R, 3.40 GHz)

SPECrate®2017_int_peak = 229

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Feb-2020

Compiler Version Notes (Continued)

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)  
      | 525.x264_r(base, peak) 557.xz_r(base)  
-----
```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====  
C      | 500.perlbench_r(peak) 557.xz_r(peak)  
-----
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====  
C      | 502.gcc_r(peak)  
-----
```

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)  
      | 525.x264_r(base, peak) 557.xz_r(base)  
-----
```

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====  
C      | 500.perlbench_r(peak) 557.xz_r(peak)  
-----
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 222

PowerEdge C6420 (Intel Xeon Gold 6246R, 3.40 GHz)

SPECrate®2017_int_peak = 229

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Apr-2020
Hardware Availability: Feb-2020
Software Availability: Feb-2020

Compiler Version Notes (Continued)

=====
C | 502.gcc_r(peak)

Intel(R) C Compiler for applications running on IA-32, Version 19.0.5 NextGen
Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base, peak)
531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 19.0.5
NextGen Technology Build 20190729
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.5.281 Build 20190815
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 222

PowerEdge C6420 (Intel Xeon Gold 6246R, 3.40 GHz)

SPECrate®2017_int_peak = 229

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Feb-2020

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -flto
-mfpmath=sse -funroll-loops -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmallo
```

C++ benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -flto -mfpmath=sse
-funroll-loops -qnextgen -fuse-ld=gold -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmallo
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmallo
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 222

PowerEdge C6420 (Intel Xeon Gold 6246R, 3.40 GHz)

SPECrate®2017_int_peak = 229

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Feb-2020

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-32/lib
-ljemalloc

505.mcf_r: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 222

PowerEdge C6420 (Intel Xeon Gold 6246R, 3.40 GHz)

SPECrate®2017_int_peak = 229

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2020

Hardware Availability: Feb-2020

Software Availability: Feb-2020

Peak Optimization Flags (Continued)

```
525.x264_r: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -flto -O3
-ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: basepeak = yes
```

```
531.deepsjeng_r: -m64 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.5.281/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
541.leela_r: basepeak = yes
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.html

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.0u5-official-linux64_revD.xml

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-27 22:30:44-0400.

Report generated on 2020-05-26 14:46:32 by CPU2017 PDF formatter v6255.

Originally published on 2020-05-26.