



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology


ThinkSystem SR665  
2.40 GHz, AMD EPYC 7532

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = 471

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Nov-2019

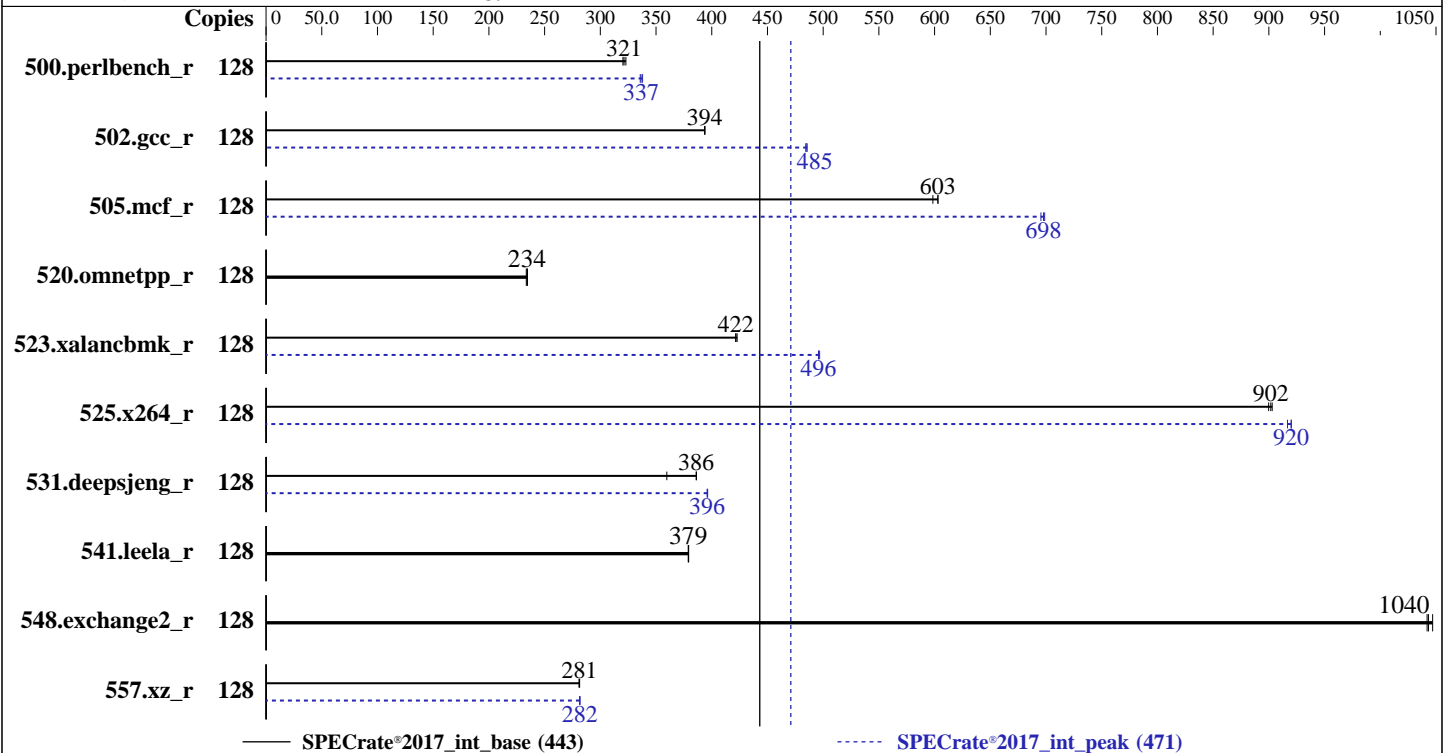

### Hardware

CPU Name: AMD EPYC 7532  
 Max MHz: 3300  
 Nominal: 2400  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip,  
 16 MB shared / 2 cores  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.1 (Ootpa)  
 Kernel 4.18.0-147.el8.x86\_64  
 C/C++/Fortran: Version 2.0.0 of AOCC  
 Parallel: No  
 Firmware: Lenovo BIOS Version D8E105P 1.00 released May-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.2.0  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.40 GHz, AMD EPYC 7532

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = 471

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Nov-2019

## Results Table

| Benchmark       | Base   |            |             |            |            |            |            | Peak   |            |             |            |            |            |            |
|-----------------|--------|------------|-------------|------------|------------|------------|------------|--------|------------|-------------|------------|------------|------------|------------|
|                 | Copies | Seconds    | Ratio       | Seconds    | Ratio      | Seconds    | Ratio      | Copies | Seconds    | Ratio       | Seconds    | Ratio      | Seconds    | Ratio      |
| 500.perlbench_r | 128    | 631        | 323         | 636        | 320        | <b>634</b> | <b>321</b> | 128    | <b>605</b> | <b>337</b>  | 607        | 336        | 603        | 338        |
| 502.gcc_r       | 128    | 461        | 394         | 460        | 394        | <b>460</b> | <b>394</b> | 128    | 374        | 484         | 373        | 486        | <b>374</b> | <b>485</b> |
| 505.mcf_r       | 128    | 346        | 598         | <b>343</b> | <b>603</b> | 343        | 603        | 128    | <b>296</b> | <b>698</b>  | 296        | 699        | 297        | 695        |
| 520.omnetpp_r   | 128    | 719        | 234         | <b>717</b> | <b>234</b> | 716        | 235        | 128    | 719        | 234         | <b>717</b> | <b>234</b> | 716        | 235        |
| 523.xalancbmk_r | 128    | <b>320</b> | <b>422</b>  | 320        | 423        | 321        | 421        | 128    | 272        | 497         | <b>273</b> | <b>496</b> | 273        | 496        |
| 525.x264_r      | 128    | <b>249</b> | <b>902</b>  | 248        | 903        | 249        | 900        | 128    | 244        | 917         | <b>244</b> | <b>920</b> | 244        | 920        |
| 531.deepsjeng_r | 128    | 380        | 386         | 408        | 360        | <b>380</b> | <b>386</b> | 128    | 370        | 396         | <b>370</b> | <b>396</b> | 370        | 396        |
| 541.leela_r     | 128    | 559        | 379         | <b>559</b> | <b>379</b> | 559        | 379        | 128    | 559        | 379         | <b>559</b> | <b>379</b> | 559        | 379        |
| 548.exchange2_r | 128    | <b>321</b> | <b>1040</b> | 320        | 1050       | 322        | 1040       | 128    | <b>321</b> | <b>1040</b> | 320        | 1050       | 322        | 1040       |
| 557.xz_r        | 128    | <b>492</b> | <b>281</b>  | 491        | 281        | 492        | 281        | 128    | 491        | 281         | 491        | 282        | <b>491</b> | <b>282</b> |

SPECrate®2017\_int\_base = **443**

SPECrate®2017\_int\_peak = **471**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665  
2.40 GHz, AMD EPYC 7532

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = 471

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2020

Hardware Availability: Jun-2020

Software Availability: Nov-2019

## Operating System Notes (Continued)

Transparent huge pages set to 'always' for this run (OS default)

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/home/cpu2017-1.1.0-amd-rome-aocc200-C3/amd_rate_aocc200_rome_C_lib/64;  
    /home/cpu2017-1.1.0-amd-rome-aocc200-C3/amd_rate_aocc200_rome_C_lib/32:"  
MALLOCONF = "retain:true"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto  
jemalloc 5.2.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

## Platform Notes

BIOS settings:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode  
NUMA nodes per socket set to NPS4

Sysinfo program /home/cpu2017-1.1.0-amd-rome-aocc200-C3/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on localhost.localdomain Sat Jun 20 10:41:06 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7532 32-Core Processor

2 "physical id"s (chips)

128 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.40 GHz, AMD EPYC 7532

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = 471

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Nov-2019

### Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 32
siblings  : 64
physical 0: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29 32 33 36 37 40 41 44 45
48 49 52 53 56 57 60 61
physical 1: cores 0 1 4 5 8 9 12 13 16 17 20 21 24 25 28 29 32 33 36 37 40 41 44 45
48 49 52 53 56 57 60 61
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):             2
NUMA node(s):         8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                49
Model name:            AMD EPYC 7532 32-Core Processor
Stepping:              0
CPU MHz:               1737.264
CPU max MHz:           2400.0000
CPU min MHz:           1500.0000
BogoMIPS:              4791.06
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             32K
L2 cache:              512K
L3 cache:              16384K
NUMA node0 CPU(s):    0-7,64-71
NUMA node1 CPU(s):    8-15,72-79
NUMA node2 CPU(s):    16-23,80-87
NUMA node3 CPU(s):    24-31,88-95
NUMA node4 CPU(s):    32-39,96-103
NUMA node5 CPU(s):    40-47,104-111
NUMA node6 CPU(s):    48-55,112-119
NUMA node7 CPU(s):    56-63,120-127
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.40 GHz, AMD EPYC 7532

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = 471

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020

**Hardware Availability:** Jun-2020

**Software Availability:** Nov-2019

### Platform Notes (Continued)

```
smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr
wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid
overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7 64 65 66 67 68 69 70 71
node 0 size: 128825 MB
node 0 free: 128576 MB
node 1 cpus: 8 9 10 11 12 13 14 15 72 73 74 75 76 77 78 79
node 1 size: 129018 MB
node 1 free: 128752 MB
node 2 cpus: 16 17 18 19 20 21 22 23 80 81 82 83 84 85 86 87
node 2 size: 129018 MB
node 2 free: 128705 MB
node 3 cpus: 24 25 26 27 28 29 30 31 88 89 90 91 92 93 94 95
node 3 size: 129006 MB
node 3 free: 128775 MB
node 4 cpus: 32 33 34 35 36 37 38 39 96 97 98 99 100 101 102 103
node 4 size: 128993 MB
node 4 free: 128807 MB
node 5 cpus: 40 41 42 43 44 45 46 47 104 105 106 107 108 109 110 111
node 5 size: 129018 MB
node 5 free: 128795 MB
node 6 cpus: 48 49 50 51 52 53 54 55 112 113 114 115 116 117 118 119
node 6 size: 129018 MB
node 6 free: 128832 MB
node 7 cpus: 56 57 58 59 60 61 62 63 120 121 122 123 124 125 126 127
node 7 size: 129019 MB
node 7 free: 128804 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32
1:  12 10 12 12 32 32 32 32
2:  12 12 10 12 32 32 32 32
3:  12 12 12 10 32 32 32 32
4:  32 32 32 32 10 12 12 12
5:  32 32 32 32 12 10 12 12
6:  32 32 32 32 12 12 10 12
7:  32 32 32 32 12 12 12 10
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.40 GHz, AMD EPYC 7532

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = 471

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Nov-2019

### Platform Notes (Continued)

```

From /proc/meminfo
MemTotal:      1056685400 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.1 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.1"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.1 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.1 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.1:ga

uname -a:
Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Thu Sep 26 15:52:44 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:      Not affected
CVE-2017-5754 (Meltdown):              Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):      Mitigation: usercopy/swaps barriers and __user
pointer sanitization
CVE-2017-5715 (Spectre variant 2):      Mitigation: Full AMD retpoline, IBPB:
conditional, IBRS_FW, STIBP: conditional, RSB
filling

run-level 3 Jun 19 19:47

SPEC is set to: /home/cpu2017-1.1.0-amd-rome-aocc200-C3
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2       xfs   838G   49G  789G   6% /home

From /sys/devices/virtual/dmi/id
BIOS:      Lenovo D8E105P-1.00 05/08/2020
Vendor:    Lenovo
Product:   ThinkSystem SR665 MB
Product Family: ThinkSystem

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.40 GHz, AMD EPYC 7532

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = 471

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Nov-2019

### Platform Notes (Continued)

Serial: 1234567890

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Samsung M393A4G43AB3-CWE 32 kB 2 rank 3200

(End of data from sysinfo program)

This system support 16 DIMMs per processor, total 32 DIMMs.  
32 DIMM slots installed with 32 GB DIMM for this run.

### Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

=====  
C | 502.gcc\_r(peak)  
-----

AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665  
2.40 GHz, AMD EPYC 7532

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = 471

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jun-2020  
**Hardware Availability:** Jun-2020  
**Software Availability:** Nov-2019

### Compiler Version Notes (Continued)

```
=====  
C          | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)  
          | 525.x264_r(base, peak) 557.xz_r(base, peak)  
=====
```

```
-----  
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
  AOCCLLVM.2.0.0-Build#191) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----
```

```
=====  
C++       | 523.xalancbmk_r(peak)  
=====
```

```
-----  
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
  AOCCLLVM.2.0.0-Build#191) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----
```

```
=====  
C++       | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)  
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)  
=====
```

```
-----  
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
  AOCCLLVM.2.0.0-Build#191) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----
```

```
=====  
C++       | 523.xalancbmk_r(peak)  
=====
```

```
-----  
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins  
  AOCCLLVM.2.0.0-Build#191) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin  
-----
```

```
=====  
C++       | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)  
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)  
=====
```

```
-----  
AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665  
2.40 GHz, AMD EPYC 7532

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = 471

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2020

Hardware Availability: Jun-2020

Software Availability: Nov-2019

## Compiler Version Notes (Continued)

AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

-----  
Fortran | 548.exchange2\_r(base, peak)

-----  
AOCC.LLVM.2.0.0.B191.2019\_07\_19 clang version 8.0.0 (CLANG: Jenkins  
AOCC\_2\_0\_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019\_07\_19)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 443

ThinkSystem SR665  
2.40 GHz, AMD EPYC 7532

SPECrate®2017\_int\_peak = 471

CPU2017 License: 9017

Test Date: Jun-2020

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2020

Tested by: Lenovo Global Technology

Software Availability: Nov-2019

## Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 443

ThinkSystem SR665  
2.40 GHz, AMD EPYC 7532

SPECrate®2017\_int\_peak = 471

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2020

Hardware Availability: Jun-2020

Software Availability: Nov-2019

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017\_int\_base = 443

ThinkSystem SR665  
2.40 GHz, AMD EPYC 7532

SPECrate®2017\_int\_peak = 471

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2020

Hardware Availability: Jun-2020

Software Availability: Nov-2019

## Peak Optimization Flags (Continued)

```
505.mcf_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

525.x264\_r: Same as 500.perlbench\_r

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -ljemalloc
```

```
531.deepsjeng_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665  
2.40 GHz, AMD EPYC 7532

SPECrate®2017\_int\_base = 443

SPECrate®2017\_int\_peak = 471

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jun-2020

Hardware Availability: Jun-2020

Software Availability: Nov-2019

## Peak Optimization Flags (Continued)

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks:

502.gcc\_r: -L/sppo/dev/cpu2017/v110/amd\_rate\_aocc200\_rome\_C\_lib/32

C++ benchmarks:

523.xalancbmk\_r: -L/sppo/dev/cpu2017/v110/amd\_rate\_aocc200\_rome\_C\_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-K.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-C3.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Rome2P-K.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-19 22:41:05-0400.

Report generated on 2020-07-07 14:39:21 by CPU2017 PDF formatter v6255.

Originally published on 2020-07-07.