



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**

(Test Sponsor: Dell Inc)

PowerEdge MX740c (Intel Xeon Gold 6258R, 2.70 GHz)

SPECspeed®2017\_fp\_base = 154

SPECspeed®2017\_fp\_peak = 156

CPU2017 License: 55


Test Sponsor: Dell Inc

Tested by: Dell Inc.

Test Date: Sep-2020

Hardware Availability: Apr-2020

Software Availability: Apr-2020

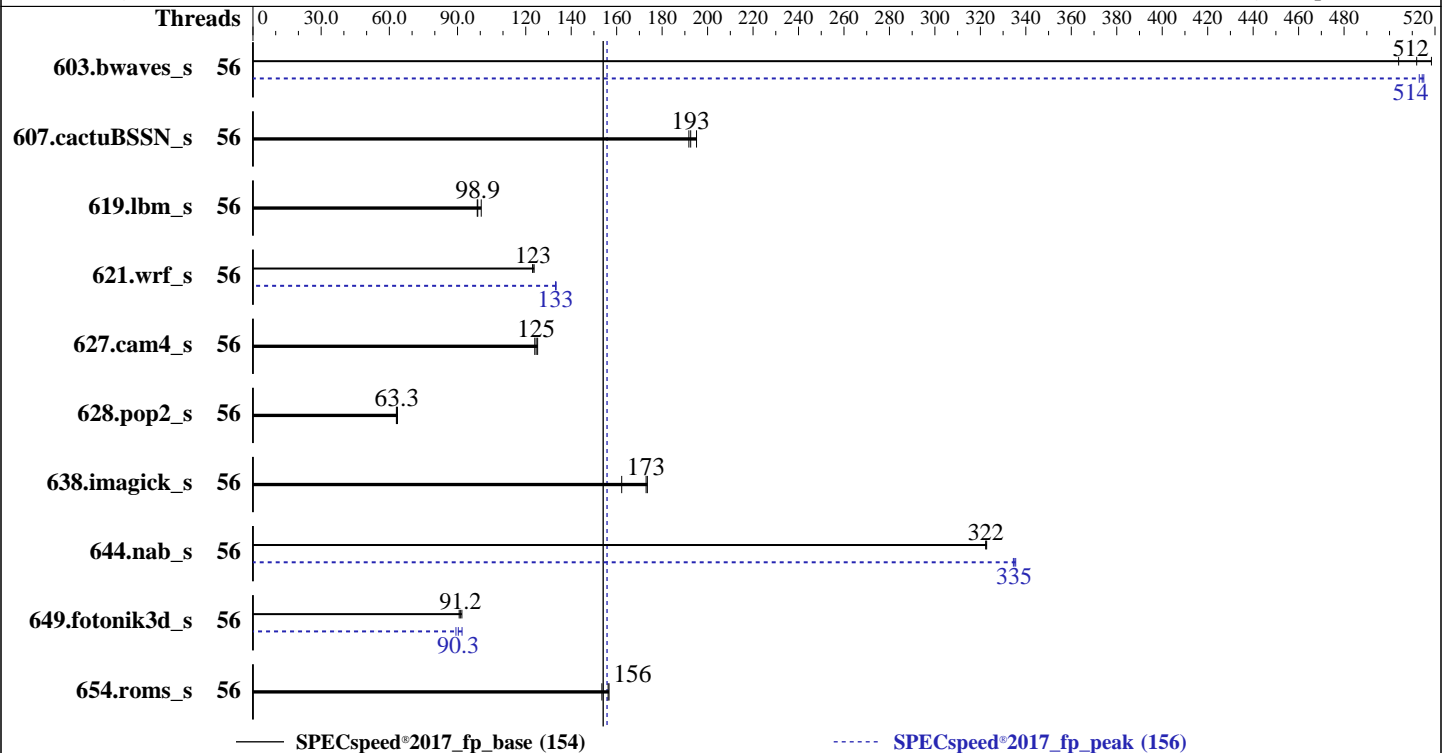

## Hardware

CPU Name: Intel Xeon Gold 6258R  
 Max MHz: 4000  
 Nominal: 2700  
 Enabled: 56 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

## Software

OS: Red Hat Enterprise Linux 8.2  
 kernel 4.18.0-193.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.1.1.217 of Intel Fortran Compiler for Linux  
 Parallel: Yes  
 Firmware: Version 2.9.1 released Aug-2020  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

(Test Sponsor: Dell Inc)

PowerEdge MX740c (Intel Xeon Gold 6258R, 2.70 GHz)

SPECspeed®2017\_fp\_base = 154

SPECspeed®2017\_fp\_peak = 156

CPU2017 License: 55  
Test Sponsor: Dell Inc  
Tested by: Dell Inc.

Test Date: Sep-2020  
Hardware Availability: Apr-2020  
Software Availability: Apr-2020

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	56	114	518	117	504	<u>115</u>	<u>512</u>	56	115	515	<u>115</u>	<u>514</u>	115	513
607.cactuBSSN_s	56	<b>86.6</b>	<b>193</b>	86.9	192	85.4	195	56	<b>86.6</b>	<b>193</b>	86.9	192	85.4	195
619.lbm_s	56	53.1	98.7	<u>53.0</u>	<u>98.9</u>	52.2	100	56	53.1	98.7	<u>53.0</u>	<u>98.9</u>	52.2	100
621.wrf_s	56	107	124	<u>107</u>	<u>123</u>	108	123	56	99.4	133	<u>99.3</u>	<u>133</u>	99.2	133
627.cam4_s	56	70.8	125	71.5	124	<u>71.1</u>	<u>125</u>	56	70.8	125	71.5	124	<u>71.1</u>	<u>125</u>
628.pop2_s	56	187	63.6	<u>187</u>	<u>63.3</u>	188	63.1	56	187	63.6	<u>187</u>	<u>63.3</u>	188	63.1
638.imagick_s	56	<b>83.4</b>	<b>173</b>	88.9	162	83.1	174	56	<b>83.4</b>	<b>173</b>	88.9	162	83.1	174
644.nab_s	56	<b>54.2</b>	<b>322</b>	54.2	322	54.1	323	56	<b>52.2</b>	<b>335</b>	52.2	335	52.1	336
649.fotonik3d_s	56	99.2	91.9	100	90.7	<u>99.9</u>	<u>91.2</u>	56	102	89.3	99.1	92.0	<u>101</u>	<u>90.3</u>
654.roms_s	56	103	153	101	157	<u>101</u>	<u>156</u>	56	103	153	101	157	<u>101</u>	<u>156</u>

SPECspeed®2017\_fp\_base = 154

SPECspeed®2017\_fp\_peak = 156

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH =  
"/dev/shm/cpu2017-ic19.lul/lib/intel64:/dev/shm/cpu2017-ic19.lul/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)  
PowerEdge MX740c (Intel Xeon Gold 6258R, 2.70 GHz)

SPECspeed®2017\_fp\_base = 154  
SPECspeed®2017\_fp\_peak = 156

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Sep-2020  
**Hardware Availability:** Apr-2020  
**Software Availability:** Apr-2020

## General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:  
Sub NUMA Cluster enabled  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1E disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub set to standard  
Logical Processor disabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
UPI Prefetch enabled  
LLC Prefetch disabled  
Dead Line LLC Alloc enabled  
Directory AtoS disabled

Sysinfo program /dev/shm/cpu2017-ic19.lul/bin/sysinfo  
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011  
running on localhost.localdomain Fri Sep 4 18:07:32 2020

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6258R CPU @ 2.70GHz  
2 "physical id"s (chips)  
56 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)  
PowerEdge MX740c (Intel Xeon Gold 6258R, 2.70 GHz)

**SPECspeed®2017\_fp\_base = 154**  
**SPECspeed®2017\_fp\_peak = 156**

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Sep-2020  
**Hardware Availability:** Apr-2020  
**Software Availability:** Apr-2020

## Platform Notes (Continued)

excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 28
siblings  : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                56
On-line CPU(s) list:   0-55
Thread(s) per core:    1
Core(s) per socket:    28
Socket(s):              2
NUMA node(s):          2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6258R CPU @ 2.70GHz
Stepping:               7
CPU MHz:                2760.698
CPU max MHz:           4000.0000
CPU min MHz:           1000.0000
BogoMIPS:               5400.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               39424K
NUMA node0 CPU(s):     0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54
NUMA node1 CPU(s):     1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47,49,51,53,55
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**

(Test Sponsor: Dell Inc)

PowerEdge MX740c (Intel Xeon Gold 6258R, 2.70 GHz)

SPECspeed®2017\_fp\_base = 154

SPECspeed®2017\_fp\_peak = 156

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Sep-2020  
**Hardware Availability:** Apr-2020  
**Software Availability:** Apr-2020

## Platform Notes (Continued)

arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 48 50
52 54
node 0 size: 385577 MB
node 0 free: 385128 MB
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39 41 43 45 47 49 51
53 55
node 1 size: 387065 MB
node 1 free: 377117 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

```
From /proc/meminfo
MemTotal: 791186236 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.2 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
itlb_multihit: KVM: Vulnerable
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)  
PowerEdge MX740c (Intel Xeon Gold 6258R, 2.70 GHz)

**SPECSpeed®2017\_fp\_base = 154**  
**SPECSpeed®2017\_fp\_peak = 156**

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Sep-2020  
**Hardware Availability:** Apr-2020  
**Software Availability:** Apr-2020

## Platform Notes (Continued)

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaggs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
tsx_async_abort:	Mitigation: Clear CPU buffers; SMT disabled

run-level 3 Sep 4 15:56

```

SPEC is set to: /dev/shm/cpu2017-ic19.1ul
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs            tmpfs    378G  4.3G  374G   2% /dev/shm

```

```

From /sys/devices/virtual/dmi/id
BIOS:      Dell Inc. 2.9.1 08/09/2020
Vendor:    Dell Inc.
Product:   PowerEdge MX740c
Product Family: PowerEdge
Serial:    1234567

```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```

Memory:
 21x 00AD00B300AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
 1x 00AD063200AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933
 2x 00AD069D00AD HMA84GR7CJR4N-WM 32 GB 2 rank 2933

```

(End of data from sysinfo program)

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler. The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Compiler Version Notes

```

=====
C          | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
          | 644.nab_s(base, peak)
-----

```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**

(Test Sponsor: Dell Inc)

PowerEdge MX740c (Intel Xeon Gold 6258R, 2.70 GHz)

SPECSpeed®2017\_fp\_base = 154

SPECSpeed®2017\_fp\_peak = 156

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc

**Tested by:** Dell Inc.

**Test Date:** Sep-2020

**Hardware Availability:** Apr-2020

**Software Availability:** Apr-2020

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

-----  
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

-----  
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**

(Test Sponsor: Dell Inc)

PowerEdge MX740c (Intel Xeon Gold 6258R, 2.70 GHz)

SPECspeed®2017\_fp\_base = 154

SPECspeed®2017\_fp\_peak = 156

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc

**Tested by:** Dell Inc.

**Test Date:** Sep-2020

**Hardware Availability:** Apr-2020

**Software Availability:** Apr-2020

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
```

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)  
PowerEdge MX740c (Intel Xeon Gold 6258R, 2.70 GHz)

SPECspeed®2017\_fp\_base = 154  
SPECspeed®2017\_fp\_peak = 156

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Sep-2020  
**Hardware Availability:** Apr-2020  
**Software Availability:** Apr-2020

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-DSPEC_OPENMP -mbranches-within-32B-boundaries -nostandard-realloc-lhs  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:  
icc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
ifort icc

Benchmarks using Fortran, C, and C++:  
icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: basepeak = yes
```

```
638.imagick_s: basepeak = yes
```

```
644.nab_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX2 -ipo -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)  
-DSPEC_SUPPRESS_OPENMP -DSPEC_OPENMP -ipo -xCORE-AVX2
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**Dell Inc.**  
(Test Sponsor: Dell Inc)  
PowerEdge MX740c (Intel Xeon Gold 6258R, 2.70 GHz)

SPECspeed®2017\_fp\_base = 154  
SPECspeed®2017\_fp\_peak = 156

**CPU2017 License:** 55  
**Test Sponsor:** Dell Inc  
**Tested by:** Dell Inc.

**Test Date:** Sep-2020  
**Hardware Availability:** Apr-2020  
**Software Availability:** Apr-2020

## Peak Optimization Flags (Continued)

603.bwaves\_s (continued):

```
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=4 -qopenmp -nostandard-realloc-lhs
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

649.fotonik3d\_s: Same as 603.bwaves\_s

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -std=c11 -Wl,-z,muldefs -prof-gen(pass 1)
-prof-use(pass 2) -ipo -xCORE-AVX2 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE12.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-09-04 18:07:32-0400.  
Report generated on 2020-09-29 15:23:16 by CPU2017 PDF formatter v6255.  
Originally published on 2020-09-29.