



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)


ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

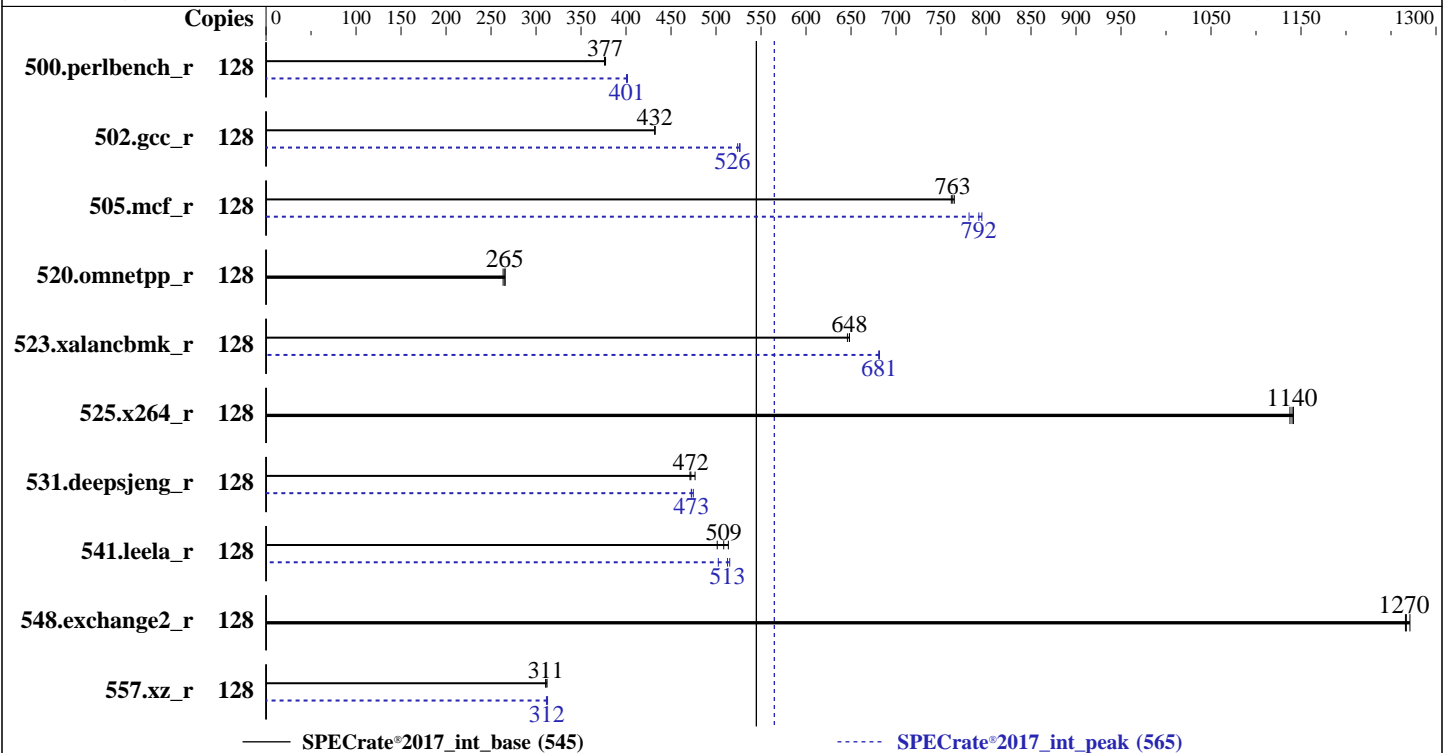

Hardware

CPU Name: AMD EPYC 7543
 Max MHz: 3700
 Nominal: 2800
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores
 Other: None
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200AA-L)
 Storage: 1 x 196 GB SATA SSD, RAID 0
 Other: None

Software

OS: Ubuntu 20.04.1 LTS (x86_64)
 Kernel 5.4.0-56-generic
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC
 Parallel: No
 Firmware: HPE BIOS Version A42 v2.40 02/23/2021 released Feb-2021
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.1.0
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	540	377	<u>541</u>	<u>377</u>	542	376	128	<u>508</u>	<u>401</u>	507	402	509	401
502.gcc_r	128	419	432	<u>420</u>	<u>432</u>	420	432	128	344	527	346	524	<u>344</u>	<u>526</u>
505.mcf_r	128	270	765	272	761	<u>271</u>	<u>763</u>	128	260	795	<u>261</u>	<u>792</u>	265	781
520.omnetpp_r	128	632	266	<u>633</u>	<u>265</u>	638	263	128	632	266	<u>633</u>	<u>265</u>	638	263
523.xalancbmk_r	128	209	648	209	646	<u>209</u>	<u>648</u>	128	<u>198</u>	<u>681</u>	198	682	199	681
525.x264_r	128	197	1140	<u>197</u>	<u>1140</u>	196	1140	128	197	1140	<u>197</u>	<u>1140</u>	196	1140
531.deepsjeng_r	128	308	477	311	471	<u>311</u>	<u>472</u>	128	310	473	<u>310</u>	<u>473</u>	309	475
541.leela_r	128	<u>417</u>	<u>509</u>	413	514	423	501	128	422	503	<u>413</u>	<u>513</u>	411	515
548.exchange2_r	128	264	1270	265	1270	<u>265</u>	<u>1270</u>	128	264	1270	265	1270	<u>265</u>	<u>1270</u>
557.xz_r	128	443	312	445	311	<u>444</u>	<u>311</u>	128	<u>443</u>	<u>312</u>	442	313	444	312

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root for peak integer runs and all FP runs to enable Transparent Hugepages (THP).
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root for base integer runs to enable THP only on request.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017n/amd_rate_aocc300_milan_A_lib/64;/home/cpu2017n/amd_rate_aocc300_milan_A_lib/32:"
MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:
MALLOC_CONF = "thp:never"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 512GiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration
Workload Profile set to General Throughput Compute
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Last-Level Cache (LLC) as NUMA Node set to Enabled
NUMA memory domains per socket set to Four memory domains per socket
Infinity Fabric Power Management set to Disabled
Infinity Fabric Performance State set to P0
Thermal Configuration set to Maximum Cooling
Workload Profile set to Custom
L2 HW Prefetcher set to Disabled

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

Platform Notes (Continued)

sysinfo program /home/cpu2017n/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on admin Wed Apr 1 23:02:32 2020

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7543 32-Core Processor
 2 "physical id"s (chips)
128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings  : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         48 bits physical, 48 bits virtual
CPU(s):                128
On-line CPU(s) list:   0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):          16
Vendor ID:              AuthenticAMD
CPU family:             25
Model:                  1
Model name:             AMD EPYC 7543 32-Core Processor
Stepping:               1
Frequency boost:       enabled
CPU MHz:                2304.684
CPU max MHz:           2800.0000
CPU min MHz:           1500.0000
BogoMIPS:              5589.71
Virtualization:        AMD-V
L1d cache:              2 MiB
L1i cache:              2 MiB
L2 cache:               32 MiB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```

L3 cache:                    512 MiB
NUMA node0 CPU(s):          0-3,64-67
NUMA node1 CPU(s):          4-7,68-71
NUMA node2 CPU(s):          8-11,72-75
NUMA node3 CPU(s):          12-15,76-79
NUMA node4 CPU(s):          16-19,80-83
NUMA node5 CPU(s):          20-23,84-87
NUMA node6 CPU(s):          24-27,88-91
NUMA node7 CPU(s):          28-31,92-95
NUMA node8 CPU(s):          32-35,96-99
NUMA node9 CPU(s):          36-39,100-103
NUMA node10 CPU(s):         40-43,104-107
NUMA node11 CPU(s):         44-47,108-111
NUMA node12 CPU(s):         48-51,112-115
NUMA node13 CPU(s):         52-55,116-119
NUMA node14 CPU(s):         56-59,120-123
NUMA node15 CPU(s):         60-63,124-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:         Not affected
Vulnerability Mds:          Not affected
Vulnerability Meltdown:     Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:    Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:    Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling
Vulnerability Srbds:         Not affected
Vulnerability Tsx async abort: Not affected
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_omsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 64 65 66 67
node 0 size: 128752 MB
node 0 free: 128560 MB
node 1 cpus: 4 5 6 7 68 69 70 71
node 1 size: 129020 MB
node 1 free: 128893 MB
node 2 cpus: 8 9 10 11 72 73 74 75
node 2 size: 129022 MB
node 2 free: 128859 MB
node 3 cpus: 12 13 14 15 76 77 78 79
node 3 size: 129021 MB
node 3 free: 128899 MB
node 4 cpus: 16 17 18 19 80 81 82 83
node 4 size: 129022 MB
node 4 free: 128854 MB
node 5 cpus: 20 21 22 23 84 85 86 87
node 5 size: 129021 MB
node 5 free: 128899 MB
node 6 cpus: 24 25 26 27 88 89 90 91
node 6 size: 129022 MB
node 6 free: 128890 MB
node 7 cpus: 28 29 30 31 92 93 94 95
node 7 size: 129009 MB
node 7 free: 128879 MB
node 8 cpus: 32 33 34 35 96 97 98 99
node 8 size: 129022 MB
node 8 free: 128887 MB
node 9 cpus: 36 37 38 39 100 101 102 103
node 9 size: 129021 MB
node 9 free: 128893 MB
node 10 cpus: 40 41 42 43 104 105 106 107
node 10 size: 129022 MB
node 10 free: 128898 MB
node 11 cpus: 44 45 46 47 108 109 110 111
node 11 size: 129021 MB
node 11 free: 128868 MB
node 12 cpus: 48 49 50 51 112 113 114 115
node 12 size: 129022 MB
node 12 free: 128904 MB
node 13 cpus: 52 53 54 55 116 117 118 119
node 13 size: 129021 MB
node 13 free: 128880 MB
node 14 cpus: 56 57 58 59 120 121 122 123
node 14 size: 129022 MB
node 14 free: 128880 MB
node 15 cpus: 60 61 62 63 124 125 126 127

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Platform Notes (Continued)

node 15 size: 129019 MB
node 15 free: 128871 MB
node distances:

node	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0:	10	11	12	12	12	12	12	12	32	32	32	32	32	32	32	32
1:	11	10	12	12	12	12	12	12	32	32	32	32	32	32	32	32
2:	12	12	10	11	12	12	12	12	32	32	32	32	32	32	32	32
3:	12	12	11	10	12	12	12	12	32	32	32	32	32	32	32	32
4:	12	12	12	12	10	11	12	12	32	32	32	32	32	32	32	32
5:	12	12	12	12	11	10	12	12	32	32	32	32	32	32	32	32
6:	12	12	12	12	12	12	10	11	32	32	32	32	32	32	32	32
7:	12	12	12	12	12	12	11	10	32	32	32	32	32	32	32	32
8:	32	32	32	32	32	32	32	32	10	11	12	12	12	12	12	12
9:	32	32	32	32	32	32	32	32	11	10	12	12	12	12	12	12
10:	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12	12
11:	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12
12:	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12	12
13:	32	32	32	32	32	32	32	32	12	12	12	12	11	10	12	12
14:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	10	11
15:	32	32	32	32	32	32	32	32	12	12	12	12	12	12	11	10

```
From /proc/meminfo
MemTotal:      2113598740 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/sbin/tuned-adm active
Current active profile: balanced
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
/usr/bin/lsb_release -d
Ubuntu 20.04.1 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: bullseye/sid
os-release:
NAME="Ubuntu"
VERSION="20.04.1 LTS (Focal Fossa)"
ID=ubuntu
ID_LIKE=debian
PRETTY_NAME="Ubuntu 20.04.1 LTS"
VERSION_ID="20.04"
HOME_URL="https://www.ubuntu.com/"
SUPPORT_URL="https://help.ubuntu.com/"
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Platform Notes (Continued)

```
uname -a:
Linux admin 5.4.0-56-generic #62-Ubuntu SMP Mon Nov 23 19:20:19 UTC 2020 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

```
run-level 5 Apr 1 17:24
```

SPEC is set to: /home/cpu2017n

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	196G	50G	137G	27%	/

From /sys/devices/virtual/dmi/id

```
Vendor:      HPE
Product:    ProLiant DL365 Gen10 Plus
Product Family: ProLiant
Serial:     CN70430NKR
```

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
16x UNKNOWN M386AAG40AM3-CWE 128 GB 4 rank 3200
16x UNKNOWN NOT AVAILABLE
```

BIOS:

```
BIOS Vendor:    HPE
BIOS Version:   A42
BIOS Date:      02/23/2021
BIOS Revision:  2.40
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Platform Notes (Continued)

Firmware Revision: 2.40

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 502.gcc_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C | 502.gcc_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Compiler Version Notes (Continued)

=====
C++ | 523.xalancbmk_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++ | 523.xalancbmk_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====
Fortran | 548.exchange2_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Compiler Version Notes (Continued)

AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs  
-lamdlibm -ljemalloc -lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch  
-mllvm -unroll-threshold=100 -finline-aggressive  
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false  
-z muldefs -mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm  
-ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4  
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split  
-flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -z muldefs -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Mar-2021
Hardware Availability: Apr-2021
Software Availability: Mar-2021

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

502.gcc_r (continued):

```
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc
```

505.mcf_r: -m64 -Wl,-allow-multiple-definition

```
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264_r: basepeak = yes

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

520.omnetpp_r: basepeak = yes

```
523.xalancbmk_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

531.deepsjeng_r: -m64 -std=c++98

```
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate®2017_int_base = 545

SPECrate®2017_int_peak = 565

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

Peak Optimization Flags (Continued)

531.deepsjeng_r (continued):

```
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc
```

541.leela_r: Same as 531.deepsjeng_r

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc_r: -L/usr/lib -Wno-unused-command-line-argument

```
-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32
```

C++ benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

523.xalancbmk_r: -L/usr/lib -Wno-unused-command-line-argument

```
-L/sppo/bin/cpu2017v115aocc3/amd_rate_aocc300_milan_A_lib/32
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revP.xml>



SPEC CPU[®]2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL365 Gen10 Plus
(2.80 GHz, AMD EPYC 7543)

SPECrate[®]2017_int_base = 545

SPECrate[®]2017_int_peak = 565

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU[®]2017 v1.1.5 on 2020-04-01 19:02:31-0400.

Report generated on 2021-04-27 16:22:11 by CPU2017 PDF formatter v6442.

Originally published on 2021-04-27.