



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro


SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

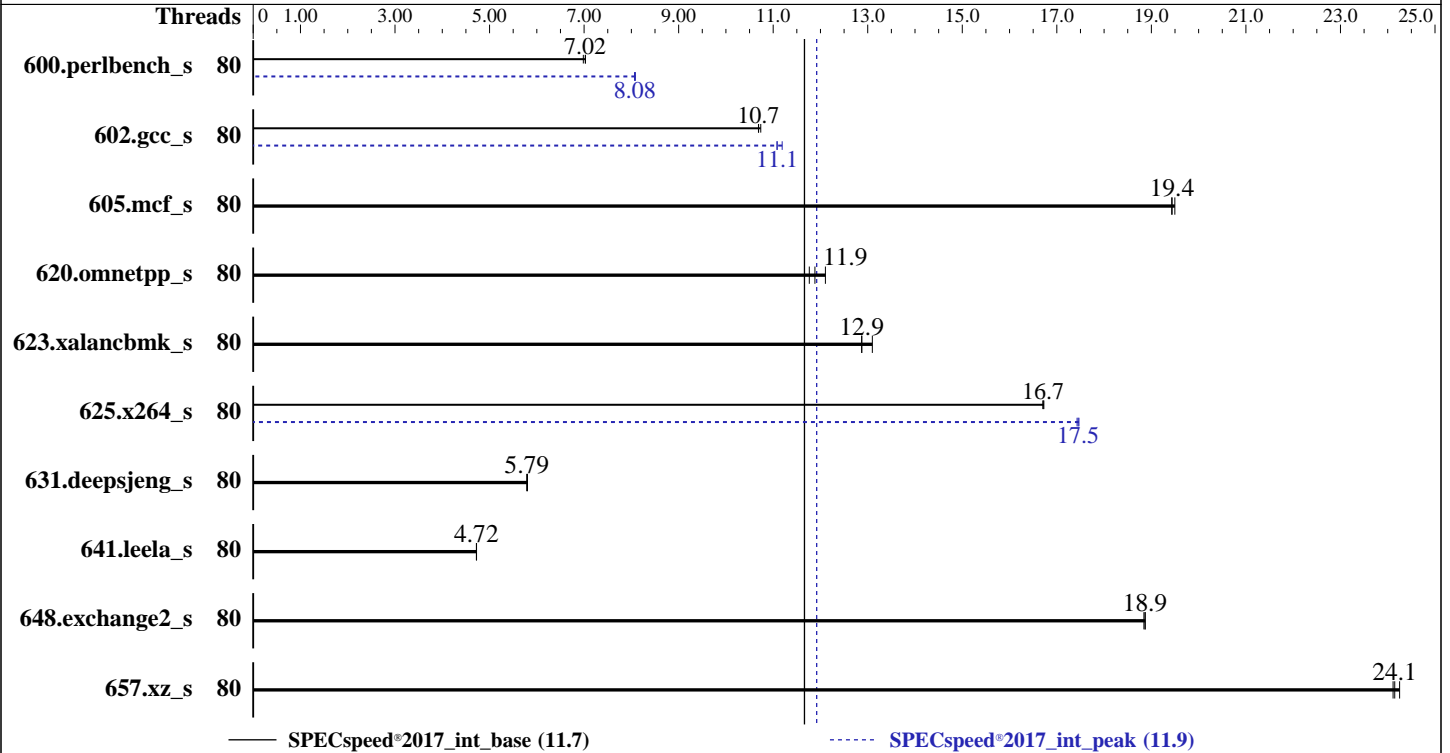

Hardware

CPU Name: Intel Xeon Platinum 8380
Max MHz: 3400
Nominal: 2300
Enabled: 80 cores, 2 chips
Orderable: 1,2 Chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 60 MB I+D on chip per chip
Other: None
Memory: 1 TB
(32 x 32 GB 2Rx4 PC4-3200AA-R)
Storage: 1 x 500 GB SATA III SSD
Other: None

Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa)
4.18.0-240.el8.x86_64
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++
Compiler Build 20201113 for Linux;
Fortran: Version 2021.1 of Intel Fortran Compiler
Classic Build 20201112 for Linux;
C/C++: Version 2021.1 of Intel C/C++ Compiler
Classic Build 20201112 for Linux
Parallel: Yes
Firmware: Version 1.1 released Apr-2021
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at
the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	80	254	6.98	253	7.03	<u>253</u>	<u>7.02</u>	80	220	8.08	220	8.07	<u>220</u>	<u>8.08</u>
602.gcc_s	80	373	10.7	371	10.7	<u>372</u>	<u>10.7</u>	80	<u>359</u>	<u>11.1</u>	359	11.1	356	11.2
605.mcf_s	80	242	19.5	<u>243</u>	<u>19.4</u>	243	19.4	80	242	19.5	<u>243</u>	<u>19.4</u>	243	19.4
620.omnetpp_s	80	<u>137</u>	<u>11.9</u>	135	12.1	139	11.8	80	<u>137</u>	<u>11.9</u>	135	12.1	139	11.8
623.xalancbmk_s	80	110	12.9	108	13.1	<u>110</u>	<u>12.9</u>	80	110	12.9	108	13.1	<u>110</u>	<u>12.9</u>
625.x264_s	80	106	16.7	<u>106</u>	<u>16.7</u>	105	16.7	80	101	17.5	101	17.4	<u>101</u>	<u>17.5</u>
631.deepsjeng_s	80	247	5.80	<u>247</u>	<u>5.79</u>	247	5.79	80	247	5.80	<u>247</u>	<u>5.79</u>	247	5.79
641.leela_s	80	<u>361</u>	<u>4.72</u>	361	4.72	361	4.72	80	<u>361</u>	<u>4.72</u>	361	4.72	361	4.72
648.exchange2_s	80	156	18.8	<u>156</u>	<u>18.9</u>	156	18.9	80	156	18.8	<u>156</u>	<u>18.9</u>	156	18.9
657.xz_s	80	<u>256</u>	<u>24.1</u>	256	24.1	255	24.3	80	<u>256</u>	<u>24.1</u>	256	24.1	255	24.3

SPECspeed®2017_int_base = **11.7**

SPECspeed®2017_int_peak = **11.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH =
"/root/cpu2017-1.1.7/lib/intel64:/root/cpu2017-1.1.7/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Technology = Custom
Power Performance Tuning = BIOS Controls EPB
ENERGY_PERF_BIAS_CFG mode = Performance
SNC (Sub NUMA)= Disabled
Hyper-Threading = Disable
LLC Dead Line Alloc = Disable

Sysinfo program /root/cpu2017-1.1.7/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on 153-77.pnet Wed Apr 28 14:30:08 2021

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
 2 "physical id"s (chips)
 80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
cpu cores      : 40
siblings       : 40
physical 0:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
                25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
physical 1:    cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
                25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
```

From lscpu:

```
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          80
On-line CPU(s) list: 0-79
Thread(s) per core: 1
Core(s) per socket: 40
Socket(s):       2
NUMA node(s):   2
Vendor ID:       GenuineIntel
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Platform Notes (Continued)

```

CPU family:          6
Model:               106
Model name:         Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
Stepping:           6
CPU MHz:            3249.866
CPU max MHz:        3400.0000
CPU min MHz:        800.0000
BogoMIPS:           4600.00
Virtualization:     VT-x
L1d cache:          48K
L1i cache:          32K
L2 cache:           1280K
L3 cache:           61440K
NUMA node0 CPU(s): 0-39
NUMA node1 CPU(s): 40-79
Flags:              fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 61440 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35 36 37 38 39
node 0 size: 483927 MB
node 0 free: 515047 MB
node 1 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64
65 66 67 68 69 70 71 72 73 74 75 76 77 78 79
node 1 size: 485954 MB
node 1 free: 514940 MB
node distances:
node  0  1
 0:   10  20
 1:   20  10

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Platform Notes (Continued)

From /proc/meminfo

MemTotal: 1056442140 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

/sbin/tuned-adm active
Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*

os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:

Linux 153-77.pnet 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020 x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Platform Notes (Continued)

run-level 3 Apr 28 14:29

SPEC is set to: /root/cpu2017-1.1.7

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfst	442G	111G	332G	25%	/

From /sys/devices/virtual/dmi/id

Vendor: Supermicro
 Product: SYS-620U-TNR
 Product Family: Ultra
 Serial: 0123456789

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x SK Hynix HMA84GR7DJR4N-XN 32 GB 2 rank 3200

BIOS:

BIOS Vendor: American Megatrends International, LLC.
 BIOS Version: 1.1
 BIOS Date: 04/21/2021
 BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 600.perlbench_s(peak)
```

```
-----
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

```
=====
C      | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
      | 625.x264_s(base, peak) 657.xz_s(base, peak)
```

```
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Compiler Version Notes (Continued)

=====
C | 600.perlbench_s(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 600.perlbench_s(base) 602.gcc_s(base, peak) 605.mcf_s(base, peak)
625.x264_s(base, peak) 657.xz_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
631.deepsjeng_s(base, peak) 641.leela_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-DSPEC_OPENMP -std=c11 -m64 -fiopenmp -Wl,-z,muldefs -xCORE-AVX512
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

600.perlbench_s: icc

C++ benchmarks:

icpx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
605.mcf_s: basepeak = yes
```

```
625.x264_s: -DSPEC_OPENMP -fiopenmp -std=c11 -m64 -Wl,-z,muldefs
-xCORE-AVX512 -flto -O3 -ffast-math
-qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
657.xz_s: basepeak = yes
```

C++ benchmarks:

```
620.omnetpp_s: basepeak = yes
```

```
623.xalancbmk_s: basepeak = yes
```

```
631.deepsjeng_s: basepeak = yes
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Supermicro

SuperServer SYS-620U-TNR
(X12DPU-6 , Intel Xeon Platinum 8380)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = 11.9

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Apr-2021
Hardware Availability: Apr-2021
Software Availability: Dec-2020

Peak Optimization Flags (Continued)

641.leela_s:basepeak = yes

Fortran benchmarks:

648.exchange2_s:basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revH.2021-04-14.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-CLX-revH.2021-04-14.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.7 on 2021-04-28 17:30:08-0400.
Report generated on 2021-06-08 19:50:59 by CPU2017 PDF formatter v6442.
Originally published on 2021-06-08.