



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

SPECspeed®2017\_int\_base = 12.3

PowerEdge R6515 (AMD EPYC 7513 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.2

CPU2017 License: 55


Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Mar-2021

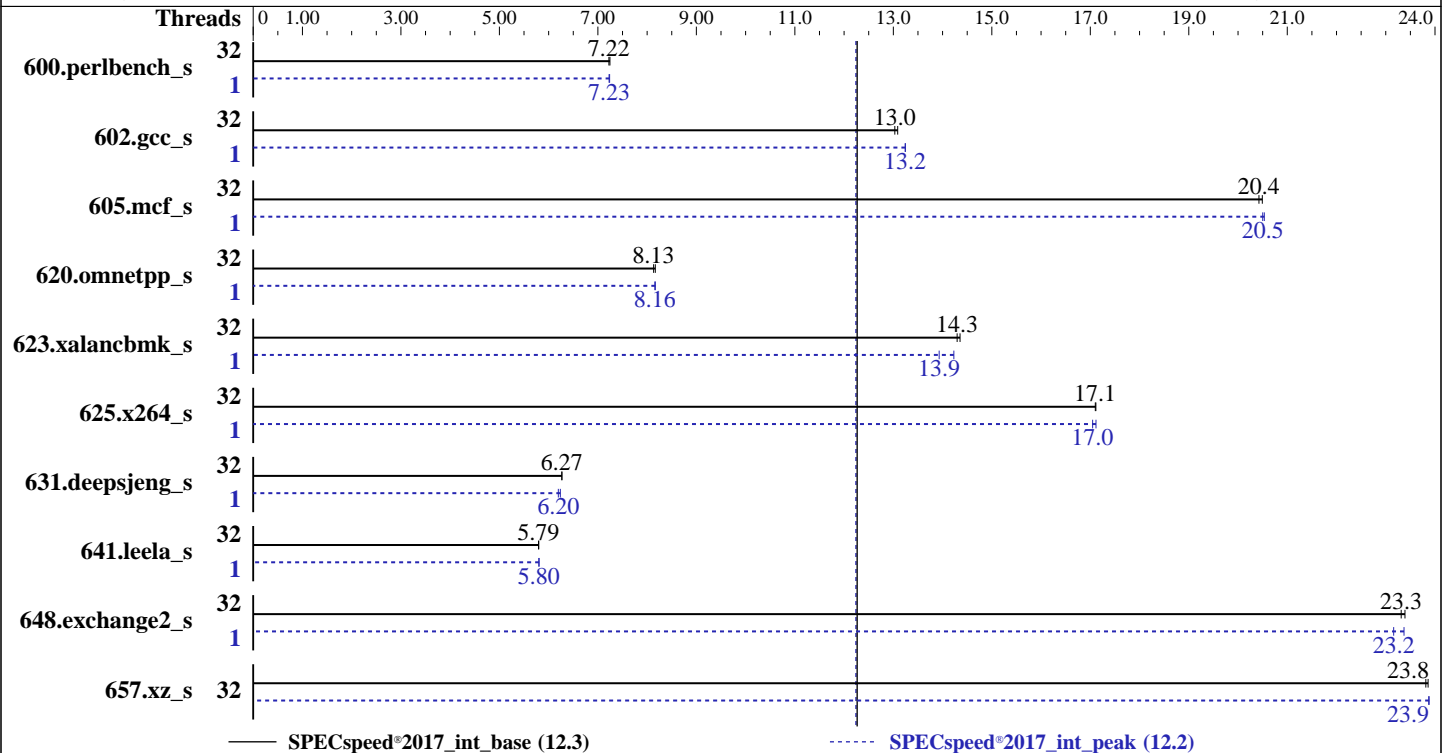

### Hardware

CPU Name: AMD EPYC 7513  
 Max MHz: 3650  
 Nominal: 2600  
 Enabled: 32 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L)  
 Storage: 256 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
 4.18.0-240.el8.x86\_64  
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 2.2.4 released Apr-2021  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.3

PowerEdge R6515 (AMD EPYC 7513 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	32	<b><u>246</u></b>	<b><u>7.22</u></b>	245	7.25			1	<b><u>246</u></b>	<b><u>7.23</u></b>	245	7.24		
602.gcc_s	32	304	13.1	<b><u>306</u></b>	<b><u>13.0</u></b>			1	301	13.2	<b><u>301</u></b>	<b><u>13.2</u></b>		
605.mcf_s	32	230	20.5	<b><u>231</u></b>	<b><u>20.4</u></b>			1	230	20.5	<b><u>230</u></b>	<b><u>20.5</u></b>		
620.omnetpp_s	32	<b><u>201</u></b>	<b><u>8.13</u></b>	200	8.17			1	200	8.17	<b><u>200</u></b>	<b><u>8.16</u></b>		
623.xalancbmk_s	32	98.7	14.4	<b><u>99.1</u></b>	<b><u>14.3</u></b>			1	<b><u>102</u></b>	<b><u>13.9</u></b>	99.6	14.2		
625.x264_s	32	103	17.1	<b><u>103</u></b>	<b><u>17.1</u></b>			1	<b><u>103</u></b>	<b><u>17.0</u></b>	103	17.1		
631.deepsjeng_s	32	229	6.27	<b><u>229</u></b>	<b><u>6.27</u></b>			1	<b><u>231</u></b>	<b><u>6.20</u></b>	230	6.24		
641.leela_s	32	<b><u>294</u></b>	<b><u>5.79</u></b>	294	5.80			1	<b><u>294</u></b>	<b><u>5.80</u></b>	294	5.81		
648.exchange2_s	32	<b><u>126</u></b>	<b><u>23.3</u></b>	126	23.4			1	126	23.4	<b><u>127</u></b>	<b><u>23.2</u></b>		
657.xz_s	32	259	23.9	<b><u>260</u></b>	<b><u>23.8</u></b>			32	<b><u>259</u></b>	<b><u>23.9</u></b>	259	23.9		

SPECspeed®2017\_int\_base = **12.3**

SPECspeed®2017\_int\_peak = **12.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
  
'echo 8 > /proc/sys/vm/dirty\_ratio' run as root to limit dirty cache to 8% of memory.  
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum necessary.  
'echo 1 > /proc/sys/vm/zone\_reclaim\_mode' run as root to free node-local memory and avoid remote memory usage.  
'sync; echo 3 > /proc/sys/vm/drop\_caches' run as root to reset filesystem caches.  
'sysctl -w kernel.randomize\_va\_space=0' run as root to disable address space layout randomization (ASLR) to reduce run-to-run variability.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.3

PowerEdge R6515 (AMD EPYC 7513 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
GOMP\_CPU\_AFFINITY = "0-31"  
LD\_LIBRARY\_PATH =  
"/mnt/ramdisk/cpu2017-1.1.7-aocc300/amd\_speed\_aocc300\_milan\_B\_lib/64;/mnt  
t/ramdisk/cpu2017-1.1.7-aocc300/amd\_speed\_aocc300\_milan\_B\_lib/32:"  
MALLOCCONF = "retain:true"  
OMP\_DYNAMIC = "false"  
OMP\_SCHEDULE = "static"  
OMP\_STACKSIZE = "128M"  
OMP\_THREAD\_LIMIT = "32"

Environment variables set by runcpu during the 600.perlbench\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 602.gcc\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 605.mcf\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalanbmk\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 625.x264\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2\_s peak run:  
GOMP\_CPU\_AFFINITY = "0"

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.3

PowerEdge R6515 (AMD EPYC 7513 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

## Environment Variables Notes (Continued)

Environment variables set by runcpu during the 657.xz\_s peak run:  
GOMP\_CPU\_AFFINITY = "0-31"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using opensUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Benchmark run from a 256 GB ramdisk created with the cmd: "mount -t tmpfs -o size=256G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

Logical processor : Disabled  
L3 Cache as NUMA Domain : Enabled  
Virtualization Technology : Disabled  
DRAM Refresh Delay : Performance  
System Profile : Custom  
CPU Power Management : Maximum Performance  
Memory Patrol Scrub : Disabled  
PCI ASPM L1 Link  
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.7-aocc300/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c

running on rhel-8-3-amd Tue May 4 09:24:39 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7513 32-Core Processor

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.3

PowerEdge R6515 (AMD EPYC 7513 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

1 "physical id"s (chips)  
32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 32

siblings : 32

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31

From lscpu:

Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 32

On-line CPU(s) list: 0-31

Thread(s) per core: 1

Core(s) per socket: 32

Socket(s): 1

NUMA node(s): 4

Vendor ID: AuthenticAMD

CPU family: 25

Model: 1

Model name: AMD EPYC 7513 32-Core Processor

Stepping: 1

CPU MHz: 2402.677

BogoMIPS: 5189.89

Virtualization: AMD-V

L1d cache: 32K

L1i cache: 32K

L2 cache: 512K

L3 cache: 32768K

NUMA node0 CPU(s): 0-7

NUMA node1 CPU(s): 8-15

NUMA node2 CPU(s): 16-23

NUMA node3 CPU(s): 24-31

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov  
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr\_opt pdpe1gb rdtscp lm  
constant\_tsc rep\_good nopl nonstop\_tsc cpuid extd\_apicid aperfmperf pni pclmulqdq  
monitor ssse3 fma cx16 pcid sse4\_1 sse4\_2 x2apic movbe popcnt aes xsave avx f16c  
rdrand lahf\_lm cmp\_legacy svm extapic cr8\_legacy abm sse4a misalignsse 3dnowprefetch  
osvw ibs skinit wdt tce topoext perfctr\_core perfctr\_nb bpext perfctr\_llc mwaitx cpb  
cat\_l3 cdp\_l3 invpcid\_single hw\_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall  
fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt\_a rdseed adx smap clflushopt clwb  
sha\_ni xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total  
cqm\_mbm\_local clzero irperf xsaveerptr wbnoinvd amd\_ppin arat npt lbrv svm\_lock  
nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter pfthreshold  
v\_vmsave\_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow\_recov succor smca

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.3

PowerEdge R6515 (AMD EPYC 7513 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 257610 MB
node 0 free: 257273 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 258041 MB
node 1 free: 257619 MB
node 2 cpus: 16 17 18 19 20 21 22 23
node 2 size: 258031 MB
node 2 free: 254004 MB
node 3 cpus: 24 25 26 27 28 29 30 31
node 3 size: 245886 MB
node 3 free: 245648 MB
node distances:
node  0  1  2  3
0:  10  11  11  11
1:  11  10  11  11
2:  11  11  10  11
3:  11  11  11  10
```

```
From /proc/meminfo
MemTotal:      1044069696 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/sbin/tuned-adm active
Current active profile: throughput-performance
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed®2017\_int\_base = 12.3

PowerEdge R6515 (AMD EPYC 7513 32-Core Processor)

SPECSpeed®2017\_int\_peak = 12.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

uname -a:

```
Linux rhel-8-3-amd 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 May 4 08:42

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.7-aocc300

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	256G	3.7G	253G	2%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

Vendor:	Dell Inc.
Product:	PowerEdge R6515
Product Family:	PowerEdge
Serial:	HTDRG13

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
8x 802C8632802C 72ASS16G72LZ-3G2B3 128 GB 4 rank 3200
8x Not Specified Not Specified
```

BIOS:

BIOS Vendor:	Dell Inc.
BIOS Version:	2.2.4
BIOS Date:	04/12/2021

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.3

PowerEdge R6515 (AMD EPYC 7513 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.2

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: May-2021  
Hardware Availability: Apr-2021  
Software Availability: Mar-2021

## Platform Notes (Continued)

BIOS Revision: 2.2

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base,  
| peak) 625.x264\_s(base, peak) 657.xz\_s(base, peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
=====

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalancbmk\_s(base, peak)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
=====

=====  
Fortran | 648.exchange2\_s(base, peak)  
=====

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
=====

## Base Compiler Invocation

C benchmarks:  
clang

C++ benchmarks:  
clang++

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.3

PowerEdge R6515 (AMD EPYC 7513 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.2

CPU2017 License: 55

Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2021

Tested by: Dell Inc.

Software Availability: Mar-2021

## Base Compiler Invocation (Continued)

Fortran benchmarks:  
flang

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.3

PowerEdge R6515 (AMD EPYC 7513 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -z muldefs
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
-lflangrti
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

C++ benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-return-type
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.3

PowerEdge R6515 (AMD EPYC 7513 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -DSPEC_OPENMP
-fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-aggressive
-mllvm -unroll-threshold=150 -DSPEC_OPENMP -fopenmp -fopenmp=libomp
-lomp -lamdlibm -ljemalloc -lflang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_int\_base = 12.3

PowerEdge R6515 (AMD EPYC 7513 32-Core Processor)

SPECspeed®2017\_int\_peak = 12.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Apr-2021

Software Availability: Mar-2021

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

C++ benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.2.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.7 on 2021-05-04 10:24:39-0400.

Report generated on 2021-06-08 19:59:46 by CPU2017 PDF formatter v6442.

Originally published on 2021-06-08.