



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate®2017_int_base = 536

R282-3C0 (Intel Xeon Platinum 8380, 2.30GHz)

SPECrate®2017_int_peak = 558

CPU2017 License: 4872


Test Date: Aug-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: May-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

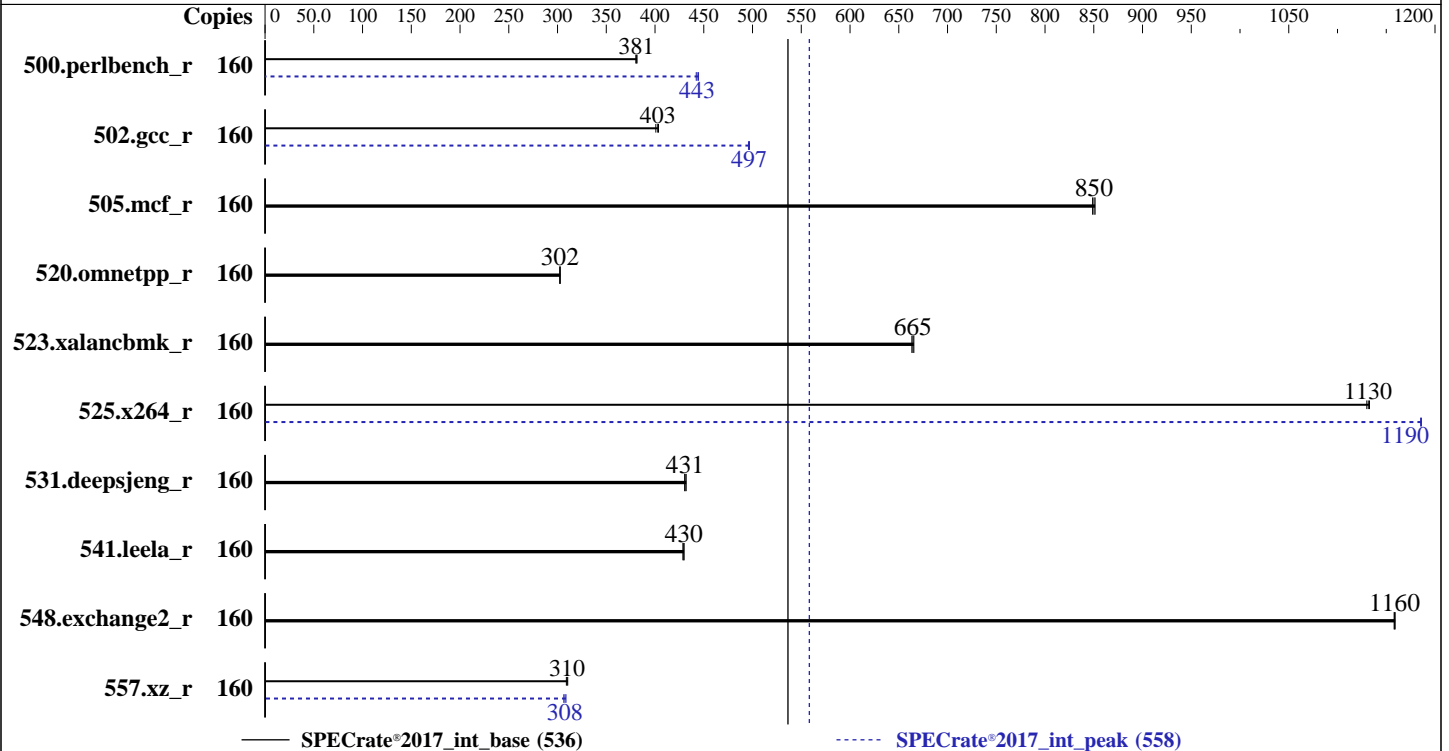

Hardware

CPU Name: Intel Xeon Platinum 8380
 Max MHz: 3400
 Nominal: 2300
 Enabled: 80 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 60 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (32 x 32 GB 2Rx4 PC4-3200AA-R)
 Storage: 1 x 3.84 TB NVMe SSD
 Other: None

Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa) 4.18.0-193.el8.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
 Parallel: No
 Firmware: Version F16 released Aug-2021
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate®2017_int_base = 536

R282-3C0 (Intel Xeon Platinum 8380, 2.30GHz)

SPECrate®2017_int_peak = 558

CPU2017 License: 4872

Test Date: Aug-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: May-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	160	668	382	670	380	669	381	160	575	443	573	445	576	442
502.gcc_r	160	561	404	563	403	565	401	160	456	497	456	497	457	496
505.mcf_r	160	305	849	304	850	304	851	160	305	849	304	850	304	851
520.omnetpp_r	160	694	302	694	302	693	303	160	694	302	694	302	693	303
523.xalancbmk_r	160	255	663	254	665	254	665	160	255	663	254	665	254	665
525.x264_r	160	248	1130	248	1130	247	1130	160	236	1190	236	1190	236	1190
531.deepsjeng_r	160	426	430	426	431	424	432	160	426	430	426	431	424	432
541.leela_r	160	618	429	617	430	617	430	160	618	429	617	430	617	430
548.exchange2_r	160	362	1160	362	1160	362	1160	160	362	1160	362	1160	362	1160
557.xz_r	160	559	309	557	310	558	310	160	560	309	564	306	562	308

SPECrate®2017_int_base = 536

SPECrate®2017_int_peak = 558

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
echo performance | tee /sys/devices/system/cpu/cpu*/cpufreq/scaling_governor
setterm -powersave off -blank 0
cpupower frequency-set -g performance
service irqbalance stop
echo 0 > /proc/sys/kernel/numa_balancing
echo 40 > /proc/sys/vm/dirty_ratio
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2021.RevB/lib/intel64:/home/cpu2021.RevB/lib/ia32:/home/cpu2021.RevB/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate®2017_int_base = 536

R282-3C0 (Intel Xeon Platinum 8380, 2.30GHz)

SPECrate®2017_int_peak = 558

CPU2017 License: 4872

Test Date: Aug-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: May-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.2

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Power Policy Quick Settings set to Best Performance

DCU Streamer Prefetcher set to Disabled

SNC (Sub NUMA) set to Enabled SNC2 (2-Clusters)

Stale Atos set to Enabled

LLC dead line alloc set to Disabled

Sysinfo program /home/cpu2021.RevB/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d

running on localhost.localdomain Thu Aug 5 17:28:16 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
```

```
2 "physical id"s (chips)
```

```
160 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 40
```

```
siblings : 80
```

```
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24  
25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
```

```
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate®2017_int_base = 536

R282-3C0 (Intel Xeon Platinum 8380, 2.30GHz)

SPECrate®2017_int_peak = 558

CPU2017 License: 4872

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Aug-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Platform Notes (Continued)

25 26 27 28 29 30 31 32 33 34 35 36 37 38 39

From lscpu from util-linux 2.32.1:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                160
On-line CPU(s) list:   0-159
Thread(s) per core:    2
Core(s) per socket:    40
Socket(s):             2
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                106
Model name:            Intel(R) Xeon(R) Platinum 8380 CPU @ 2.30GHz
Stepping:              6
CPU MHz:               3000.000
CPU max MHz:           3400.0000
CPU min MHz:           800.0000
BogoMIPS:              4600.00
Virtualization:        VT-x
L1d cache:             48K
L1i cache:             32K
L2 cache:              1280K
L3 cache:              61440K
NUMA node0 CPU(s):    0-19,80-99
NUMA node1 CPU(s):    20-39,100-119
NUMA node2 CPU(s):    40-59,120-139
NUMA node3 CPU(s):    60-79,140-159

```

```

Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs
ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local wbnoinvd
dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid md_clear pconfig flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 61440 KB

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate®2017_int_base = 536

R282-3C0 (Intel Xeon Platinum 8380, 2.30GHz)

SPECrate®2017_int_peak = 558

CPU2017 License: 4872

Test Date: Aug-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: May-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Platform Notes (Continued)

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99

node 0 size: 257593 MB

node 0 free: 257230 MB

node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119

node 1 size: 258011 MB

node 1 free: 257587 MB

node 2 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139

node 2 size: 258039 MB

node 2 free: 257773 MB

node 3 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159

node 3 size: 258034 MB

node 3 free: 257461 MB

node distances:

node	0	1	2	3
0:	10	11	20	20
1:	11	10	20	20
2:	20	20	10	11
3:	20	20	11	10

From /proc/meminfo

MemTotal: 1056439696 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.2 (Ootpa)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="8.2"

PLATFORM_ID="platform:el8"

PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"

ANSI_COLOR="0;31"

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate®2017_int_base = 536

R282-3C0 (Intel Xeon Platinum 8380, 2.30GHz)

SPECrate®2017_int_peak = 558

CPU2017 License: 4872

Test Date: Aug-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: May-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Platform Notes (Continued)

```
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Aug 5 17:24

SPEC is set to: /home/cpu2021.RevB

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	3.5T	102G	3.4T	3%	/home

From /sys/devices/virtual/dmi/id

```
Vendor: GIGABYTE
Product: R282-3C0-00
Product Family: Server
Serial: GLG1PA512A0006
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Samsung M393A4K40EB3-CWE 32 GB 2 rank 3200

BIOS:

```
BIOS Vendor: GIGABYTE
BIOS Version: F16
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate®2017_int_base = 536

R282-3C0 (Intel Xeon Platinum 8380, 2.30GHz)

SPECrate®2017_int_peak = 558

CPU2017 License: 4872

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Aug-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Platform Notes (Continued)

BIOS Date: 08/02/2021

BIOS Revision: 5.22

(End of data from sysinfo program)

Compiler Version Notes

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)
=====

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(peak) 557.xz_r(peak)
=====

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)
=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate®2017_int_base = 536

R282-3C0 (Intel Xeon Platinum 8380, 2.30GHz)

SPECrate®2017_int_peak = 558

CPU2017 License: 4872

Test Date: Aug-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: May-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Compiler Version Notes (Continued)

```
=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C          | 500.perlbench_r(peak) 557.xz_r(peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)
64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C          | 502.gcc_r(peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version
2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C          | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
          | 525.x264_r(base, peak) 557.xz_r(base)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C++       | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran   | 548.exchange2_r(base, peak)
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate®2017_int_base = 536

R282-3C0 (Intel Xeon Platinum 8380, 2.30GHz)

SPECrate®2017_int_peak = 558

CPU2017 License: 4872

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Aug-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmallo

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate®2017_int_base = 536

R282-3C0 (Intel Xeon Platinum 8380, 2.30GHz)

SPECrate®2017_int_peak = 558

CPU2017 License: 4872

Test Date: Aug-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: May-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmallo
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench_r: icc

557.xz_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate®2017_int_base = 536

R282-3C0 (Intel Xeon Platinum 8380, 2.30GHz)

SPECrate®2017_int_peak = 558

CPU2017 License: 4872

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Test Date: Aug-2021

Hardware Availability: May-2021

Software Availability: Dec-2020

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmallocc
```

```
502.gcc_r: -m32
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemallocc
```

```
505.mcf_r: basepeak = yes
```

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmallocc
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmallocc
```

C++ benchmarks:

```
520.omnetpp_r: basepeak = yes
```

```
523.xalancbmk_r: basepeak = yes
```

```
531.deepsjeng_r: basepeak = yes
```

```
541.leela_r: basepeak = yes
```

Fortran benchmarks:

```
548.exchange2_r: basepeak = yes
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

GIGA-BYTE TECHNOLOGY CO., LTD.

SPECrate®2017_int_base = 536

R282-3C0 (Intel Xeon Platinum 8380, 2.30GHz)

SPECrate®2017_int_peak = 558

CPU2017 License: 4872

Test Date: Aug-2021

Test Sponsor: GIGA-BYTE TECHNOLOGY CO., LTD.

Hardware Availability: May-2021

Tested by: GIGA-BYTE TECHNOLOGY CO., LTD.

Software Availability: Dec-2020

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/GIGABYTE-Platform-Flags-Intel-ICX-rev1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/GIGABYTE-Platform-Flags-Intel-ICX-rev1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-08-05 17:28:16-0400.

Report generated on 2021-09-01 14:17:24 by CPU2017 PDF formatter v6442.

Originally published on 2021-08-31.