



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 91.9

PowerEdge R6515 (AMD EPYC 72F3 8-Core Processor)

SPECrate®2017\_int\_peak = 93.6

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Jul-2021

Software Availability: Mar-2021

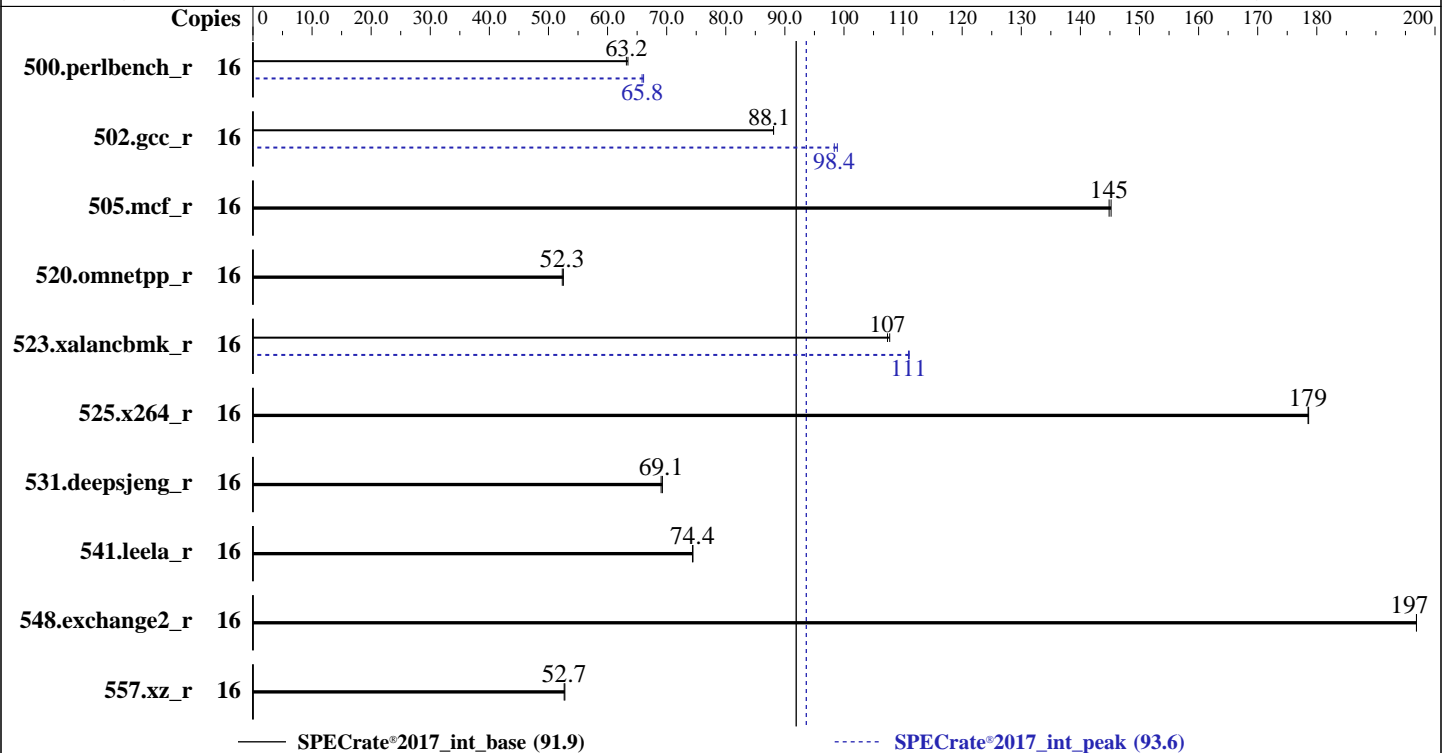

### Hardware

CPU Name: AMD EPYC 72F3  
 Max MHz: 4100  
 Nominal: 3700  
 Enabled: 8 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB per core  
 Other: None  
 Memory: 1 TB (8 x 128 GB 4Rx4 PC4-3200AA-L)  
 Storage: 128 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
 4.18.0-240.el8.x86\_64  
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 2.2.4 released Apr-2021  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 91.9

PowerEdge R6515 (AMD EPYC 72F3 8-Core Processor)

SPECrate®2017\_int\_peak = 93.6

CPU2017 License: 55

Test Date: Jun-2021

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2021

Tested by: Dell Inc.

Software Availability: Mar-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	16	<b>403</b>	<b>63.2</b>	401	63.4			16	<b>387</b>	<b>65.8</b>	385	66.1		
502.gcc_r	16	<b>257</b>	<b>88.1</b>	257	88.1			16	<b>230</b>	<b>98.4</b>	229	98.9		
505.mcf_r	16	<b>178</b>	<b>145</b>	178	145			16	<b>178</b>	<b>145</b>	178	145		
520.omnetpp_r	16	400	52.5	<b>401</b>	<b>52.3</b>			16	400	52.5	<b>401</b>	<b>52.3</b>		
523.xalancbmk_r	16	157	108	<b>157</b>	<b>107</b>			16	<b>152</b>	<b>111</b>	152	111		
525.x264_r	16	<b>157</b>	<b>179</b>	157	179			16	<b>157</b>	<b>179</b>	157	179		
531.deepsjeng_r	16	265	69.3	<b>266</b>	<b>69.1</b>			16	265	69.3	<b>266</b>	<b>69.1</b>		
541.leela_r	16	<b>356</b>	<b>74.4</b>	356	74.5			16	<b>356</b>	<b>74.4</b>	356	74.5		
548.exchange2_r	16	<b>213</b>	<b>197</b>	213	197			16	<b>213</b>	<b>197</b>	213	197		
557.xz_r	16	<b>328</b>	<b>52.7</b>	327	52.8			16	<b>328</b>	<b>52.7</b>	327	52.8		

SPECrate®2017\_int\_base = **91.9**

SPECrate®2017\_int\_peak = **93.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 91.9

PowerEdge R6515 (AMD EPYC 72F3 8-Core Processor)

SPECrate®2017\_int\_peak = 93.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Jul-2021

Software Availability: Mar-2021

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =  
    "/mnt/ramdisk/cpu2017-1.1.8-aocc300-B2/amd_rate_aocc300_milan_B_lib/lib;  
    /mnt/ramdisk/cpu2017-1.1.8-aocc300-B2/amd_rate_aocc300_milan_B_lib/lib32  
    :"
```

```
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalanbmk\_r peak run:

```
MALLOC_CONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Benchmark run from a 128 GB ramdisk created with the cmd: "mount -t tmpfs -o size=128G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

NUMA Nodes per Socket : 4

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 91.9

PowerEdge R6515 (AMD EPYC 72F3 8-Core Processor)

SPECrate®2017\_int\_peak = 93.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Jul-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

L3 Cache as NUMA Domain : Enabled  
Virtualization Technology : Disabled  
DRAM Refresh Delay : Performance

System Profile : Custom  
CPU Power Management : Maximum Performance  
Memory Patrol Scrub : Disabled  
PCI ASPM L1 Link  
Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-aocc300-B2/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on rhel-8-3-amd Mon Jun 21 09:08:03 2021

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 72F3 8-Core Processor  
1 "physical id"s (chips)  
16 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16  
physical 0: cores 0 1 2 3 4 5 6 7

From lscpu from util-linux 2.32.1:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 16  
On-line CPU(s) list: 0-15  
Thread(s) per core: 2  
Core(s) per socket: 8  
Socket(s): 1  
NUMA node(s): 8  
Vendor ID: AuthenticAMD  
CPU family: 25  
Model: 1  
Model name: AMD EPYC 72F3 8-Core Processor  
Stepping: 1  
CPU MHz: 2639.929  
BogoMIPS: 7385.64  
Virtualization: AMD-V  
L1d cache: 32K

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 91.9

PowerEdge R6515 (AMD EPYC 72F3 8-Core Processor)

SPECrate®2017\_int\_peak = 93.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Jul-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

```

L1i cache:      32K
L2 cache:      512K
L3 cache:      32768K
NUMA node0 CPU(s): 0,8
NUMA node1 CPU(s): 1,9
NUMA node2 CPU(s): 2,10
NUMA node3 CPU(s): 3,11
NUMA node4 CPU(s): 4,12
NUMA node5 CPU(s): 5,13
NUMA node6 CPU(s): 6,14
NUMA node7 CPU(s): 7,15

```

```

Flags:          fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate sme ssbd mba sev ibrs ibpb stibp vmmcall
fsgsbase bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb
sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
v_vmsave_vmload vgif unip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 8
node 0 size: 128538 MB
node 0 free: 128445 MB
node 1 cpus: 1 9
node 1 size: 128997 MB
node 1 free: 128906 MB
node 2 cpus: 2 10
node 2 size: 128993 MB
node 2 free: 128847 MB
node 3 cpus: 3 11
node 3 size: 128955 MB
node 3 free: 128915 MB
node 4 cpus: 4 12
node 4 size: 128937 MB
node 4 free: 128833 MB
node 5 cpus: 5 13
node 5 size: 128977 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 91.9

PowerEdge R6515 (AMD EPYC 72F3 8-Core Processor)

SPECrate®2017\_int\_peak = 93.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Jul-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

```

node 5 free: 128899 MB
node 6 cpus: 6 14
node 6 size: 128987 MB
node 6 free: 128853 MB
node 7 cpus: 7 15
node 7 size: 128975 MB
node 7 free: 124697 MB
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 11 12 12 12 12 12 12
 1:  11 10 12 12 12 12 12 12
 2:  12 12 10 11 12 12 12 12
 3:  12 12 11 10 12 12 12 12
 4:  12 12 12 12 10 11 12 12
 5:  12 12 12 12 11 10 12 12
 6:  12 12 12 12 12 12 10 11
 7:  12 12 12 12 12 12 11 10

```

From /proc/meminfo

```

MemTotal:      1056453900 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sbin/tuned-adm active

Current active profile: throughput-performance

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"

```

```

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

```

uname -a:

```

Linux rhel-8-3-amd 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020 x86_64
x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit): Not affected

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 91.9

PowerEdge R6515 (AMD EPYC 72F3 8-Core Processor)

SPECrate®2017\_int\_peak = 93.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Jul-2021

Software Availability: Mar-2021

## Platform Notes (Continued)

CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Jun 21 04:57

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-aocc300-B2
Filesystem      Type  Size  Used Avail Use% Mounted on
tmpfs            tmpfs 128G  4.0G 125G   4% /mnt/ramdisk
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge R6515
Product Family: PowerEdge
Serial:          HTDRG13
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
8x 802C8632802C 72ASS16G72LZ-3G2B3 128 GB 4 rank 3200
8x Not Specified Not Specified
```

```
BIOS:
BIOS Vendor:    Dell Inc.
BIOS Version:   2.2.4
BIOS Date:      04/12/2021
BIOS Revision:  2.2
```

(End of data from sysinfo program)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 91.9

PowerEdge R6515 (AMD EPYC 72F3 8-Core Processor)

SPECrate®2017\_int\_peak = 93.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Jul-2021

Software Availability: Mar-2021

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
C | 502.gcc\_r(peak)  
-----

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
C++ | 523.xalanbmk\_r(peak)  
-----

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
-----

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 91.9

PowerEdge R6515 (AMD EPYC 72F3 8-Core Processor)

SPECrate®2017\_int\_peak = 93.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Jul-2021

Software Availability: Mar-2021

## Compiler Version Notes (Continued)

Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C++ | 523.xalancbmk\_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
Fortran | 548.exchange2\_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 91.9

PowerEdge R6515 (AMD EPYC 72F3 8-Core Processor)

SPECrate®2017\_int\_peak = 93.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Jul-2021

Software Availability: Mar-2021

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti
```

C++ benchmarks:

```
-m64 -std=c++98 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 91.9

PowerEdge R6515 (AMD EPYC 72F3 8-Core Processor)

SPECrate®2017\_int\_peak = 93.6

CPU2017 License: 55

Test Date: Jun-2021

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2021

Tested by: Dell Inc.

Software Availability: Mar-2021

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm
-ljemalloc -lflang -lflangrti
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -z muldefs -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti
```

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 91.9

PowerEdge R6515 (AMD EPYC 72F3 8-Core Processor)

SPECrate®2017\_int\_peak = 93.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Jul-2021

Software Availability: Mar-2021

## Peak Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 91.9

PowerEdge R6515 (AMD EPYC 72F3 8-Core Processor)

SPECrate®2017\_int\_peak = 93.6

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Jun-2021

Hardware Availability: Jul-2021

Software Availability: Mar-2021

## Peak Optimization Flags (Continued)

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto -Wl,-mllvm -Wl,-function-specialize -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3 -fveclib=AMDLIBM -finline-aggressive -mllvm -unroll-threshold=100 -flv-function-specialization -mllvm -enable-licm-vrp -mllvm -reroll-loops -mllvm -aggressive-loop-unswitch -mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp=true -mllvm -do-block-reorder=aggressive -fvirtual-function-elimination -fvisibility=hidden -ljemalloc

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib -Wno-unused-command-line-argument -L/sppo/bin/cpu2017v115aocc3/amd\_rate\_aocc300\_milan\_A\_lib/32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk\_r: -L/usr/lib -Wno-unused-command-line-argument -L/sppo/bin/cpu2017v115aocc3/amd\_rate\_aocc300\_milan\_A\_lib/32



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 91.9

PowerEdge R6515 (AMD EPYC 72F3 8-Core Processor)

SPECrate®2017\_int\_peak = 93.6

**CPU2017 License:** 55

**Test Date:** Jun-2021

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Jul-2021

**Tested by:** Dell Inc.

**Software Availability:** Mar-2021

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.3.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-Milan-rev2.3.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-06-21 10:08:03-0400.

Report generated on 2021-09-29 13:24:23 by CPU2017 PDF formatter v6442.

Originally published on 2021-09-29.