



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion


SPECspeed®2017_int_base = 10.7

xFusion 2488H V5 (Intel Xeon Gold 6252N)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2022
Hardware Availability: Apr-2019
Software Availability: Jun-2021

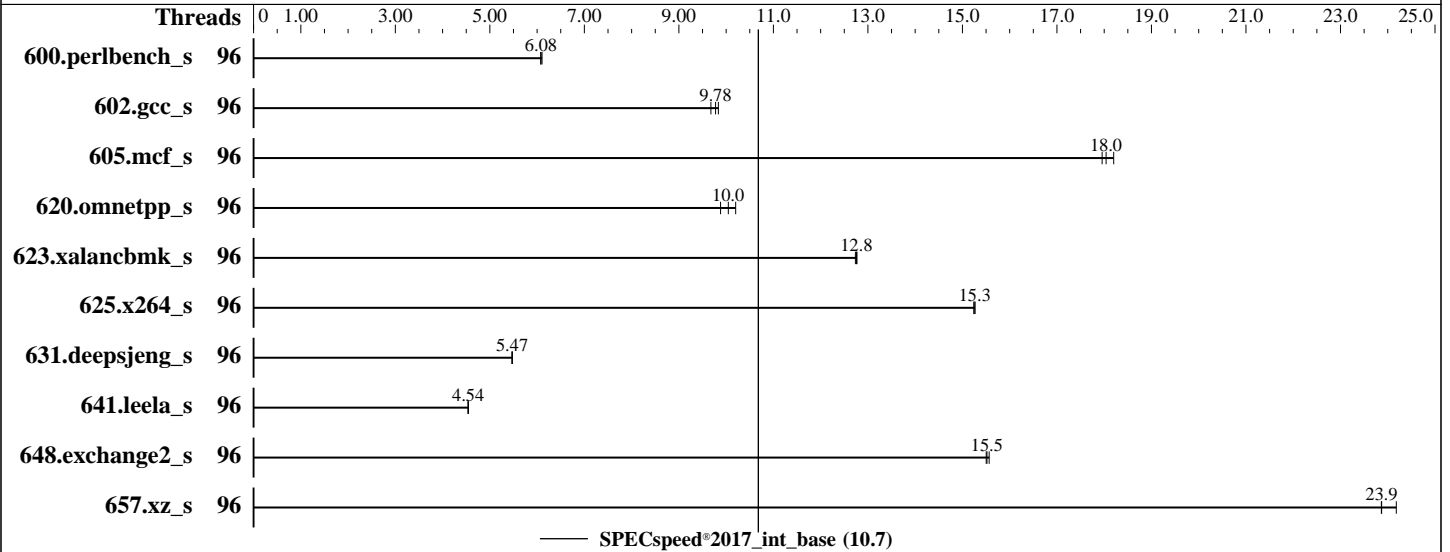

Hardware

CPU Name: Intel Xeon Gold 6252N
Max MHz: 3600
Nominal: 2300
Enabled: 96 cores, 4 chips
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 35.75 MB I+D on chip per chip
Other: None
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2933Y-R)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.el8.x86_64
Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
Parallel: Yes
Firmware: Version 7.87 Released Nov-2020
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 10.7

xFusion 2488H V5 (Intel Xeon Gold 6252N)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2022
Hardware Availability: Apr-2019
Software Availability: Jun-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	96	291	6.10	292	6.07	<u>292</u>	<u>6.08</u>							
602.gcc_s	96	411	9.68	405	9.84	<u>407</u>	<u>9.78</u>							
605.mcf_s	96	<u>262</u>	<u>18.0</u>	259	18.2	263	18.0							
620.omnetpp_s	96	160	10.2	165	9.88	<u>162</u>	<u>10.0</u>							
623.xalancbmk_s	96	<u>111</u>	<u>12.8</u>	111	12.8	111	12.7							
625.x264_s	96	<u>116</u>	<u>15.3</u>	116	15.2	116	15.3							
631.deepsjeng_s	96	<u>262</u>	<u>5.47</u>	262	5.47	262	5.47							
641.leela_s	96	376	4.54	375	4.54	<u>376</u>	<u>4.54</u>							
648.exchange2_s	96	<u>189</u>	<u>15.5</u>	189	15.6	190	15.5							
657.xz_s	96	259	23.9	256	24.2	<u>259</u>	<u>23.9</u>							

SPECspeed®2017_int_base = 10.7

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/spec2017/lib/intel64:/spec2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 10.7

xFusion 2488H V5 (Intel Xeon Gold 6252N)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2022
Hardware Availability: Apr-2019
Software Availability: Jun-2021

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:
Power Policy Set to Load Balance
Hyper-Threading Set to Disabled

Sysinfo program /spec2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on localhost.localdomain Sat Mar 5 23:39:18 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6252N CPU @ 2.30GHz
4 "physical id"s (chips)
96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 24
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
physical 1: cores 0 1 2 3 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 25 26 27 28 29
physical 2: cores 0 1 2 3 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu from util-linux 2.32.1:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 96
On-line CPU(s) list: 0-95
Thread(s) per core: 1
Core(s) per socket: 24
Socket(s): 4
NUMA node(s): 4
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6252N CPU @ 2.30GHz
BIOS Model name: Intel(R) Xeon(R) Gold 6252N CPU @ 2.30GHz
Stepping: 7

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 10.7

xFusion 2488H V5 (Intel Xeon Gold 6252N)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2022
Hardware Availability: Apr-2019
Software Availability: Jun-2021

Platform Notes (Continued)

```

CPU MHz: 1000.298
CPU max MHz: 3600.0000
CPU min MHz: 1000.0000
BogoMIPS: 4600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-23
NUMA node1 CPU(s): 24-47
NUMA node2 CPU(s): 48-71
NUMA node3 CPU(s): 72-95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
ept vpid ept_ad fsgsbase tsc_adjust bml hle avx2 smep bmi2 erms invpcid rtm cqm mpx
rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
node 0 size: 191707 MB
node 0 free: 185474 MB
node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
node 1 size: 193493 MB
node 1 free: 193030 MB
node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
node 2 size: 193530 MB
node 2 free: 193212 MB
node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
node 3 size: 193530 MB
node 3 free: 191615 MB
node distances:
node 0 1 2 3
0: 10 21 21 21

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 10.7

xFusion 2488H V5 (Intel Xeon Gold 6252N)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2022
Hardware Availability: Apr-2019
Software Availability: Jun-2021

Platform Notes (Continued)

```
1: 21 10 21 21
2: 21 21 10 21
3: 21 21 21 10
```

From /proc/meminfo

```
MemTotal: 790796340 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

/sbin/tuned-adm active

Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has performance

From /etc/*release* /etc/*version*

os-release:

```
NAME="Red Hat Enterprise Linux"
VERSION="8.4 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.4"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.4 (Ootpa)"
ANSI_COLOR="0;31"
```

redhat-release: Red Hat Enterprise Linux release 8.4 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.4 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise_linux:8.4:ga

uname -a:

```
Linux localhost.localdomain 4.18.0-305.el8.x86_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

CVE-2018-3620 (L1 Terminal Fault):

Microarchitectural Data Sampling:

CVE-2017-5754 (Meltdown):

CVE-2018-3639 (Speculative Store Bypass):

KVM: Mitigation: Split huge pages

Not affected

Not affected

Not affected

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 10.7

xFusion 2488H V5 (Intel Xeon Gold 6252N)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2022
Hardware Availability: Apr-2019
Software Availability: Jun-2021

Platform Notes (Continued)

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
CVE-2019-11135 (TSX Asynchronous Abort): Vulnerable: Clear CPU buffers attempted, no microcode; SMT disabled

run-level 3 Mar 5 23:29

SPEC is set to: /spec2017

```
Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda3        xfs       859G     123G   737G   15% /
```

From /sys/devices/virtual/dmi/id

```
Vendor:          serial
Product:         2488H V5
Product Family:  Purley
Serial:          serial
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
48x Samsung M393A2K43CB2-CVF 16 GB 2 rank 2933

BIOS:
BIOS Vendor: INSYDE Corp.
BIOS Version: 7.87
BIOS Date: 11/26/2020
BIOS Revision: 7.87

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C          | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)  
          | 625.x264_s(base) 657.xz_s(base)  
-----
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====  
C++       | 620.omnetpp_s(base) 623.xalanbmk_s(base) 631.deepsjeng_s(base)  
         | 641.leela_s(base)  
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 10.7

xFusion 2488H V5 (Intel Xeon Gold 6252N)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2022
Hardware Availability: Apr-2019
Software Availability: Jun-2021

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 10.7

xFusion 2488H V5 (Intel Xeon Gold 6252N)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Mar-2022
Hardware Availability: Apr-2019
Software Availability: Jun-2021

Base Optimization Flags

C benchmarks:

```
-DSPEC_OPENMP -std=c11 -m64 -fiopenmp -Wl,-z,muldefs -xCORE-AVX512  
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/  
-lqkmallocc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CSL-V1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CSL-V1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-03-05 23:39:18-0500.
Report generated on 2022-05-25 13:13:40 by CPU2017 PDF formatter v6442.
Originally published on 2022-05-24.