



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 249

### Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

CPU2017 License: 9019


Test Date: Jul-2022

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2022

Tested by: Cisco Systems

Software Availability: Dec-2021

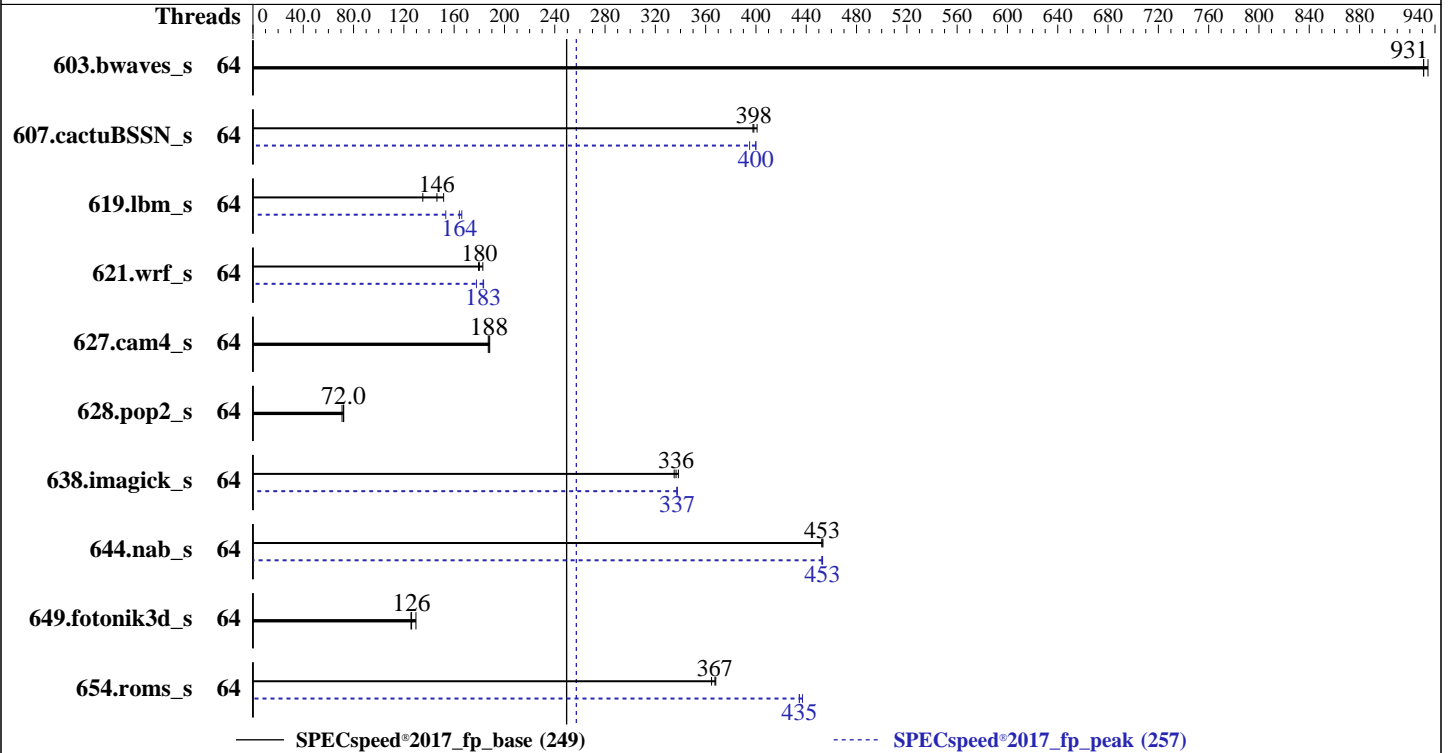

### Hardware

CPU Name: AMD EPYC 7573X  
 Max MHz: 3600  
 Nominal: 2800  
 Enabled: 64 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 768 MB I+D on chip per chip, 96 MB shared / 4 cores  
 Other: None  
 Memory: 2 TB (16 x 128 GB 4Rx4 PC4-3200V-L)  
 Storage: 1 x 960 GB M.2 SSD SATA  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86\_64) kernel version 5.3.18-22-default  
 Compiler: C/C++/Fortran: Version 3.2.0 of AOCC  
 Parallel: Yes  
 Firmware: Version 4.2.2b released May-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 249

## Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	64	63.1	934	63.4	931	<b>63.4</b>	<b>931</b>	64	63.1	934	63.4	931	<b>63.4</b>	<b>931</b>
607.cactuBSSN_s	64	41.6	401	<b>41.9</b>	<b>398</b>	41.9	398	64	42.2	395	<b>41.7</b>	<b>400</b>	41.7	400
619.lbm_s	64	<b>35.8</b>	<b>146</b>	38.8	135	34.5	152	64	31.5	166	<b>31.9</b>	<b>164</b>	34.2	153
621.wrf_s	64	73.7	179	72.3	183	<b>73.4</b>	<b>180</b>	64	72.1	183	<b>72.3</b>	<b>183</b>	74.4	178
627.cam4_s	64	<b>47.2</b>	<b>188</b>	47.1	188	47.4	187	64	<b>47.2</b>	<b>188</b>	47.1	188	47.4	187
628.pop2_s	64	164	72.2	168	70.9	<b>165</b>	<b>72.0</b>	64	164	72.2	168	70.9	<b>165</b>	<b>72.0</b>
638.imagick_s	64	42.6	338	43.1	335	<b>42.9</b>	<b>336</b>	64	<b>42.8</b>	<b>337</b>	42.8	337	42.8	337
644.nab_s	64	38.6	452	38.5	453	<b>38.6</b>	<b>453</b>	64	38.6	453	38.6	452	<b>38.6</b>	<b>453</b>
649.fotonik3d_s	64	70.3	130	<b>72.3</b>	<b>126</b>	72.5	126	64	70.3	130	<b>72.3</b>	<b>126</b>	72.5	126
654.roms_s	64	<b>42.9</b>	<b>367</b>	42.8	368	43.2	365	64	36.0	437	36.2	434	<b>36.2</b>	<b>435</b>

SPECspeed®2017\_fp\_base = 249

SPECspeed®2017\_fp\_peak = 257

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_fp\_base = 249

Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
To enable THP only on request for peak runs of 628.pop2_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To disable THP for peak runs of 627.cam4_s, 649.fotonik3d_s, and 654.roms_s,
'echo never > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
```

## Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-63"
LD_LIBRARY_PATH =
"/home/cpu2017/amd_speed_aocc320_milanx_A_lib/lib;/home/cpu2017/amd_spee
d_aocc320_milanx_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOCONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "64"

Environment variables set by runcpu during the 607.cactuBSSN_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0-63"

Environment variables set by runcpu during the 654.roms_s peak run:
GOMP_CPU_AFFINITY = "0-63"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_fp\_base = 249

Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jul-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Dec-2021

## General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

### BIOS Settings

SMT Mode set to Disabled  
NUMA nodes per socket set to NPS1  
ACPI SRAT L3 Cache As NUMA Domain set to Enabled  
DRAM Scrub Time set to Disabled  
Determinism Slider set to Power  
L1 Stream HW Prefetcher set to Enabled  
APBDIS set to 1

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost Thu Jul 21 04:11:21 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```
model name : AMD EPYC 7573X 32-Core Processor
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

### From lscpu from util-linux 2.33.1:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 249

## Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jul-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Dec-2021

### Platform Notes (Continued)

```

Byte Order:                Little Endian
Address sizes:             48 bits physical, 48 bits virtual
CPU(s):                   64
On-line CPU(s) list:      0-63
Thread(s) per core:       1
Core(s) per socket:       32
Socket(s):                 2
NUMA node(s):             16
Vendor ID:                 AuthenticAMD
CPU family:                25
Model:                     1
Model name:                AMD EPYC 7573X 32-Core Processor
Stepping:                  2
CPU MHz:                   1613.072
CPU max MHz:               2800.0000
CPU min MHz:               1500.0000
BogoMIPS:                  5589.79
Virtualization:            AMD-V
L1d cache:                 32K
L1i cache:                 32K
L2 cache:                  512K
L3 cache:                  98304K
NUMA node0 CPU(s):        0-3
NUMA node1 CPU(s):        4-7
NUMA node2 CPU(s):        8-11
NUMA node3 CPU(s):        12-15
NUMA node4 CPU(s):        16-19
NUMA node5 CPU(s):        20-23
NUMA node6 CPU(s):        24-27
NUMA node7 CPU(s):        28-31
NUMA node8 CPU(s):        32-35
NUMA node9 CPU(s):        36-39
NUMA node10 CPU(s):       40-43
NUMA node11 CPU(s):       44-47
NUMA node12 CPU(s):       48-51
NUMA node13 CPU(s):       52-55
NUMA node14 CPU(s):       56-59
NUMA node15 CPU(s):       60-63
Flags:                     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 249

## Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jul-2022

**Hardware Availability:** Mar-2022

**Software Availability:** Dec-2021

### Platform Notes (Continued)

```
clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3
node 0 size: 128839 MB
node 0 free: 128745 MB
node 1 cpus: 4 5 6 7
node 1 size: 129022 MB
node 1 free: 128836 MB
node 2 cpus: 8 9 10 11
node 2 size: 129022 MB
node 2 free: 128863 MB
node 3 cpus: 12 13 14 15
node 3 size: 129022 MB
node 3 free: 128917 MB
node 4 cpus: 16 17 18 19
node 4 size: 129022 MB
node 4 free: 128799 MB
node 5 cpus: 20 21 22 23
node 5 size: 128988 MB
node 5 free: 128908 MB
node 6 cpus: 24 25 26 27
node 6 size: 129022 MB
node 6 free: 128899 MB
node 7 cpus: 28 29 30 31
node 7 size: 116909 MB
node 7 free: 116827 MB
node 8 cpus: 32 33 34 35
node 8 size: 129022 MB
node 8 free: 128958 MB
node 9 cpus: 36 37 38 39
node 9 size: 129022 MB
node 9 free: 128964 MB
node 10 cpus: 40 41 42 43
node 10 size: 129022 MB
node 10 free: 128961 MB
node 11 cpus: 44 45 46 47
node 11 size: 129022 MB
node 11 free: 128963 MB
node 12 cpus: 48 49 50 51
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 249

## Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

### Platform Notes (Continued)

```

node 12 size: 129022 MB
node 12 free: 128962 MB
node 13 cpus: 52 53 54 55
node 13 size: 129022 MB
node 13 free: 128962 MB
node 14 cpus: 56 57 58 59
node 14 size: 129022 MB
node 14 free: 128951 MB
node 15 cpus: 60 61 62 63
node 15 size: 129017 MB
node 15 free: 128952 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
 0:  10 11 11 11 11 11 11 11 32 32 32 32 32 32 32 32
 1:  11 10 11 11 11 11 11 11 32 32 32 32 32 32 32 32
 2:  11 11 10 11 11 11 11 11 32 32 32 32 32 32 32 32
 3:  11 11 11 10 11 11 11 11 32 32 32 32 32 32 32 32
 4:  11 11 11 11 10 11 11 11 32 32 32 32 32 32 32 32
 5:  11 11 11 11 11 10 11 11 32 32 32 32 32 32 32 32
 6:  11 11 11 11 11 11 10 11 32 32 32 32 32 32 32 32
 7:  11 11 11 11 11 11 11 10 32 32 32 32 32 32 32 32
 8:  32 32 32 32 32 32 32 32 32 10 11 11 11 11 11 11
 9:  32 32 32 32 32 32 32 32 32 11 10 11 11 11 11 11
10:  32 32 32 32 32 32 32 32 32 11 11 10 11 11 11 11
11:  32 32 32 32 32 32 32 32 32 11 11 11 10 11 11 11
12:  32 32 32 32 32 32 32 32 32 11 11 11 11 10 11 11
13:  32 32 32 32 32 32 32 32 32 11 11 11 11 11 10 11
14:  32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 10
15:  32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 10

```

From /proc/meminfo

```

MemTotal:      2101276012 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

## Cisco Systems

SPECspeed®2017\_fp\_base = 249

## Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jul-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Dec-2021

### Platform Notes (Continued)

CPE\_NAME="cpe:/o:suse:sles:15:sp2"

uname -a:

```
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Apr 17 06:12

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb2	xfs	223G	14G	210G	6%	/

From /sys/devices/virtual/dmi/id

Vendor:	Cisco Systems Inc
Product:	UCSC-C225-M6S
Serial:	WZP252408JE

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x 0xCE00 M386AAG40AM3-CWE	128 GB	4 rank	3200
16x Unknown	Unknown		

BIOS:

BIOS Vendor:	Cisco Systems, Inc.
BIOS Version:	C225M6.4.2.2b.0.0509222122
BIOS Date:	05/09/2022

(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_fp\_base = 249

Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

**CPU2017 License:** 9019  
**Test Sponsor:** Cisco Systems  
**Tested by:** Cisco Systems

**Test Date:** Jul-2022  
**Hardware Availability:** Mar-2022  
**Software Availability:** Dec-2021

## Platform Notes (Continued)

BIOS Revision: 5.22

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin  
=====

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)  
=====

AMD clang version 13.0.0 (CLANG: AOCC\_3.2.0-Build#128 2021\_11\_12) (based on LLVM Mirror.Version.13.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_fp\_base = 249

Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Compiler Version Notes (Continued)

```

=====
Fortran, C      | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
                | 628.pop2_s(base, peak)
=====

```

```

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)

```

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

```

AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
LLVM Mirror.Version.13.0.0)

```

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64

607.cactuBSSN\_s: -DSPEC\_LP64

619.lbm\_s: -DSPEC\_LP64

621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64

628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_fp\_base = 249

Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Base Portability Flags (Continued)

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_fp\_base = 249

Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-z muldefs -DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -z muldefs -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_fp\_base = 249

Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Peak Compiler Invocation (Continued)

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

```
638.imagick_s: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -freemap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_fp\_base = 249

Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jul-2022

Hardware Availability: Mar-2022

Software Availability: Dec-2021

## Peak Optimization Flags (Continued)

638.imagick\_s (continued):

```
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

644.nab\_s: Same as 638.imagick\_s

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

```
654.roms_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-DSPEC_OPENMP -fopenmp=libomp -lomp -lamdlibm -ljemalloc
-lflang
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=5 -mllvm -unroll-threshold=50
-freemap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -DSPEC_OPENMP
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

627.cam4\_s: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_fp\_base = 249

Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

CPU2017 License: 9019

Test Date: Jul-2022

Test Sponsor: Cisco Systems

Hardware Availability: Mar-2022

Tested by: Cisco Systems

Software Availability: Dec-2021

## Peak Optimization Flags (Continued)

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```

-m64 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp
-Wl,-mllvm -Wl,-do-block-reorder=aggressive
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=5
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -Mrecursive
-mllvm -do-block-reorder=aggressive -DSPEC_OPENMP -fopenmp=libomp
-lomp -lamdlibm -ljemalloc -lflang

```

## Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revD.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Cisco Systems

SPECspeed®2017\_fp\_base = 249

Cisco UCS C225 M6 (AMD EPYC 7573X)

SPECspeed®2017\_fp\_peak = 257

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Jul-2022

**Hardware Availability:** Mar-2022

**Software Availability:** Dec-2021

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-07-21 07:11:21-0400.  
Report generated on 2022-08-31 20:07:51 by CPU2017 PDF formatter v6442.  
Originally published on 2022-08-30.