



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8276L, 2.20 GHz)

SPECrate®2017_fp_base = 634

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Apr-2018

Software Availability: May-2022

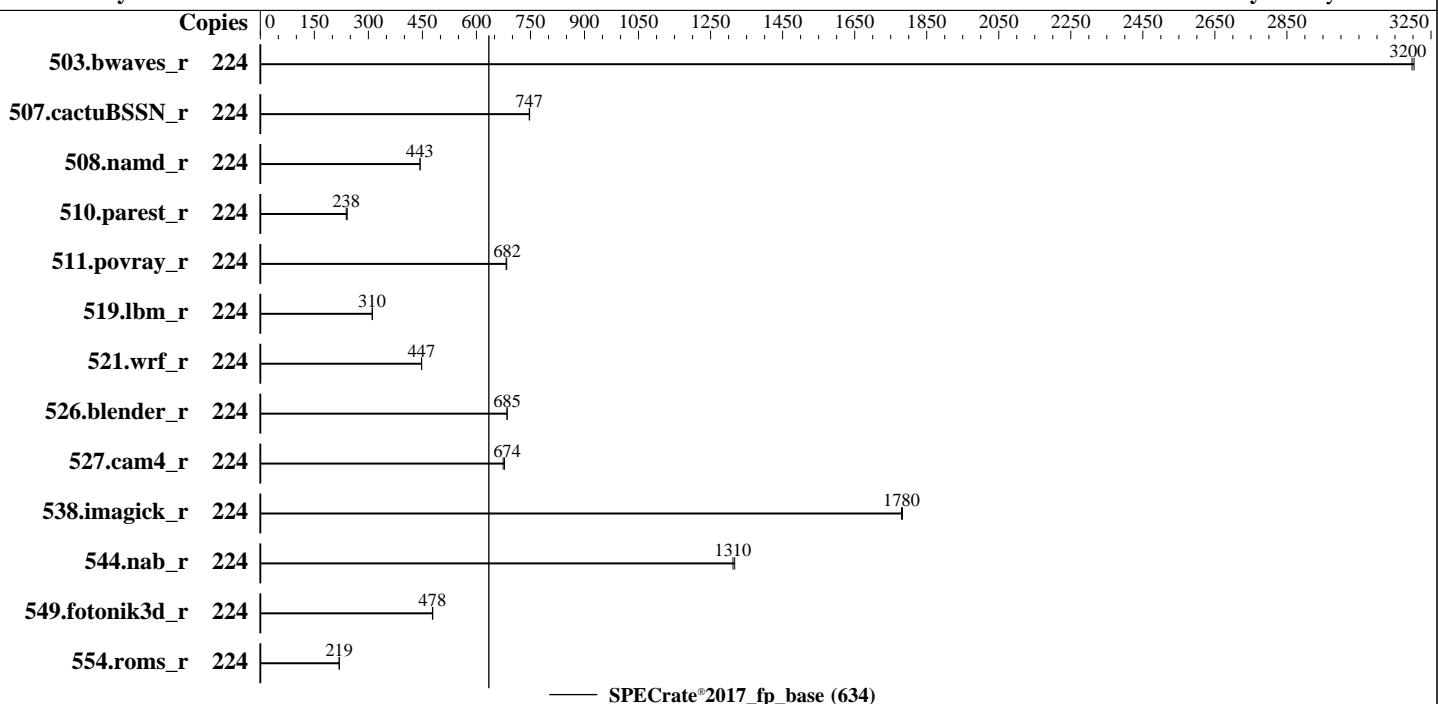

Hardware

CPU Name: Intel Xeon Platinum 8276L
 Max MHz: 4000
 Nominal: 2200
 Enabled: 112 cores, 4 chips, 2 threads/core
 Orderable: 1,2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC4-3200AA-R, running at 2933)
 Storage: 125 GB on tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux 8.6 (Ootpa) 4.18.0-372.9.1.el8.x86_64
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: Version 2.15.1 released Jun-2022
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8276L, 2.20 GHz)

SPECrate®2017_fp_base = 634

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Apr-2018

Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	224	701	3200	703	3200									
507.cactusBSSN_r	224	380	747	379	748									
508.namd_r	224	480	444	480	443									
510.parest_r	224	2457	238	2428	241									
511.povray_r	224	765	684	766	682									
519.lbm_r	224	758	312	761	310									
521.wrf_r	224	1120	448	1122	447									
526.blender_r	224	498	685	498	685									
527.cam4_r	224	581	674	578	678									
538.imagick_r	224	313	1780	312	1780									
544.nab_r	224	286	1320	287	1310									
549.fotonik3d_r	224	1827	478	1823	479									
554.roms_r	224	1625	219	1627	219									

SPECrate®2017_fp_base = 634

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.8-ic2022.1/je5.0.1-64"

MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8276L, 2.20 GHz)

SPECrate®2017_fp_base = 634

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Apr-2018

Software Availability: May-2022

General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```
Virtualization Technology : Disabled
    Sub NUMA Cluster : Enabled
    DCU Streamer Prefetcher : Disabled
    Dead Line LLC Alloc : Disabled
```

```
System Profile : Custom
CPU Power Management : Maximum Performance
    C1E : Disabled
    C States : Autonomous
Memory Patrol Scrub : Disabled
Energy Efficiency Policy : Performance
PCI ASPM L1 Link
    Power Management : Disabled
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-ic2022.1/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on auvcetillemlm1.corp.emc.com Thu Nov 17 23:47:46 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8276L, 2.20 GHz)

SPECrate®2017_fp_base = 634

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Apr-2018

Software Availability: May-2022

Platform Notes (Continued)

```
4 "physical id"s (chips)
224 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

From lscpu from util-linux 2.32.1:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Byte Order:              Little Endian
CPU(s):                  224
On-line CPU(s) list:    0-223
Thread(s) per core:     2
Core(s) per socket:     28
Socket(s):               4
NUMA node(s):            8
Vendor ID:               GenuineIntel
BIOS Vendor ID:          Intel
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
BIOS Model name:         Intel(R) Xeon(R) Platinum 8276L CPU @ 2.20GHz
Stepping:                 5
CPU MHz:                 4000.000
CPU max MHz:             4000.0000
CPU min MHz:             1000.0000
BogoMIPS:                 4400.00
L1d cache:                32K
L1i cache:                32K
L2 cache:                  1024K
L3 cache:                  39424K
NUMA node0 CPU(s):
0,9,17,25,33,41,49,57,65,73,81,89,97,105,112,121,129,137,145,153,161,169,177,185,193
,201,209,217
NUMA node1 CPU(s):
1,8,16,24,32,40,48,56,64,72,80,88,96,104,113,120,128,136,144,152,160,168,176,184,192
,200,208,216
NUMA node2 CPU(s):
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8276L, 2.20 GHz)

SPECrate®2017_fp_base = 634

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2018

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

2,10,18,26,34,42,50,58,66,74,82,90,98,106,114,122,130,138,146,154,162,170,178,186,194,202,210,218

NUMA node3 CPU(s):

3,11,19,27,35,43,51,59,67,75,83,91,99,107,115,123,131,139,147,155,163,171,179,187,195,203,211,219

NUMA node4 CPU(s):

4,12,20,28,36,44,52,60,68,76,84,92,100,108,116,124,132,140,148,156,164,172,180,188,196,204,212,220

NUMA node5 CPU(s):

5,13,21,29,37,45,53,61,69,77,85,93,101,109,117,125,133,141,149,157,165,173,181,189,197,205,213,221

NUMA node6 CPU(s):

6,14,22,30,38,46,54,62,70,78,86,94,102,110,118,126,134,142,150,158,166,174,182,190,198,206,214,222

NUMA node7 CPU(s):

7,15,23,31,39,47,55,63,71,79,87,95,103,111,119,127,135,143,151,159,167,175,183,191,199,207,215,223

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16 xptr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occur_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke md_clear flush_lll arch_capabilities

/proc/cpuinfo cache data
cache size : 39424 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0 9 17 25 33 41 49 57 65 73 81 89 97 105 112 121 129 137 145 153 161 169 177 185 193 201 209 217

node 0 size: 96761 MB

node 0 free: 95608 MB

node 1 cpus: 1 8 16 24 32 40 48 56 64 72 80 88 96 104 113 120 128 136 144 152 160 168 176 184 192 200 208 216

node 1 size: 94882 MB

node 1 free: 91332 MB

node 2 cpus: 2 10 18 26 34 42 50 58 66 74 82 90 98 106 114 122 130 138 146 154 162 170 178 186 194 202 210 218

node 2 size: 96761 MB

node 2 free: 95692 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8276L, 2.20 GHz)

SPECrate®2017_fp_base = 634

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Apr-2018

Software Availability: May-2022

Platform Notes (Continued)

```
node 3 cpus: 3 11 19 27 35 43 51 59 67 75 83 91 99 107 115 123 131 139 147 155 163 171  
179 187 195 203 211 219  
node 3 size: 96761 MB  
node 3 free: 95056 MB  
node 4 cpus: 4 12 20 28 36 44 52 60 68 76 84 92 100 108 116 124 132 140 148 156 164 172  
180 188 196 204 212 220  
node 4 size: 96720 MB  
node 4 free: 94953 MB  
node 5 cpus: 5 13 21 29 37 45 53 61 69 77 85 93 101 109 117 125 133 141 149 157 165 173  
181 189 197 205 213 221  
node 5 size: 96761 MB  
node 5 free: 96244 MB  
node 6 cpus: 6 14 22 30 38 46 54 62 70 78 86 94 102 110 118 126 134 142 150 158 166 174  
182 190 198 206 214 222  
node 6 size: 96761 MB  
node 6 free: 96343 MB  
node 7 cpus: 7 15 23 31 39 47 55 63 71 79 87 95 103 111 119 127 135 143 151 159 167 175  
183 191 199 207 215 223  
node 7 size: 96751 MB  
node 7 free: 96260 MB  
node distances:  
node 0 1 2 3 4 5 6 7  
0: 10 21 21 21 21 11 21 21  
1: 21 10 21 21 11 21 21 21  
2: 21 21 10 21 21 21 11 21  
3: 21 21 21 10 21 21 21 11  
4: 21 11 21 21 10 21 21 21  
5: 11 21 21 21 21 10 21 21  
6: 21 21 11 21 21 21 10 21  
7: 21 21 21 11 21 21 21 10
```

From /proc/meminfo

```
MemTotal: 790694756 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

/sbin/tuned-adm active
Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.6 (Ootpa)"
ID="rhel"

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8276L, 2.20 GHz)

SPECrate®2017_fp_base = 634

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 55

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Apr-2018

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

```
ID_LIKE="fedora"
VERSION_ID="8.6"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.6 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.6 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.6 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos
```

```
uname -a:
Linux avcetillemlm1.corp.emc.com 4.18.0-372.9.1.el8.x86_64 #1 SMP Fri Apr 15 22:12:19
EDT 2022 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	KVM: Mitigation: VMX unsupported
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Mitigation: Clear CPU buffers; SMT vulnerable
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Nov 17 19:58

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-ic2022.1
Filesystem      Type   Size  Used Avail Use% Mounted on
tmpfs           tmpfs  125G  3.6G  122G   3% /mnt/ramdisk
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge R940
Product Family:  PowerEdge
Serial:          3MM3HH2
```

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8276L, 2.20 GHz)

SPECrate®2017_fp_base = 634

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Apr-2018

Software Availability: May-2022

Platform Notes (Continued)

allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x 00CE063200CE M393A4G43AB3-CWE 32 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor: Dell Inc.
BIOS Version: 2.15.1
BIOS Date: 06/15/2022
BIOS Revision: 2.15

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++ | 508.namd_r(base) 510.parest_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++, C | 511.povray_r(base) 526.blender_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

C++, C, Fortran | 507.cactusBSSN_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8276L, 2.20 GHz)

SPECrate®2017_fp_base = 634

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Apr-2018

Software Availability: May-2022

Compiler Version Notes (Continued)

Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,

Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran, C | 521.wrf_r(base) 527.cam4_r(base)
=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using both C and C++:

icpx icx

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8276L, 2.20 GHz)

SPECrate®2017_fp_base = 634

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Apr-2018

Software Availability: May-2022

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactusBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fno-standard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fno-standard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940 (Intel Xeon Platinum 8276L, 2.20 GHz)

SPECrate®2017_fp_base = 634

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2022

Hardware Availability: Apr-2018

Software Availability: May-2022

Base Optimization Flags (Continued)

Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc  
-L/usr/local/jemalloc64-5.0.1/lib
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.2.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-11-17 23:47:45-0500.

Report generated on 2022-12-07 10:44:25 by CPU2017 PDF formatter v6442.

Originally published on 2022-12-06.