



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11(Z13PP-D32) Server System
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECSpeed®2017_int_base = 14.7

SPECSpeed®2017_int_peak = 15.0

CPU2017 License: 9016


Test Date: Dec-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jan-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2022

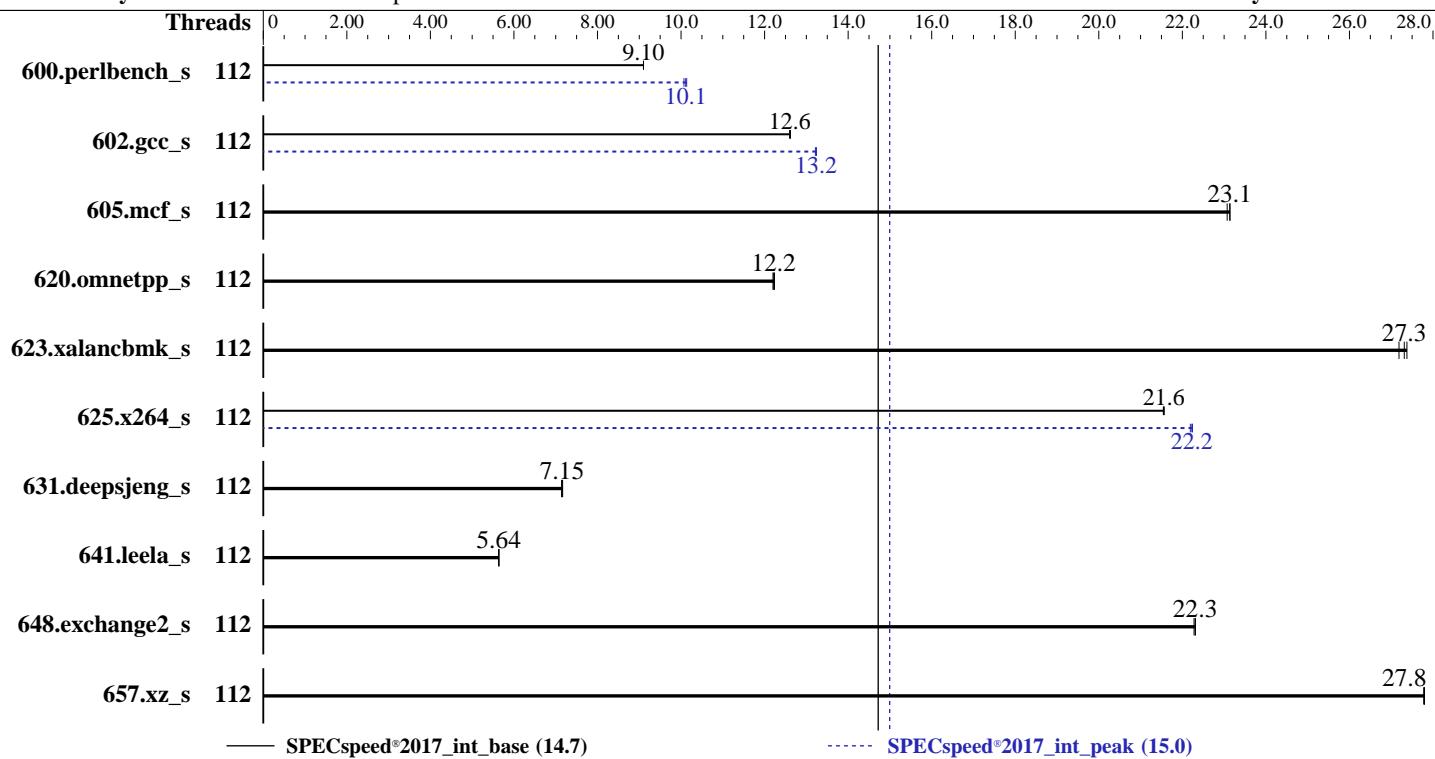

Hardware

CPU Name: Intel Xeon Platinum 8480+
Max MHz: 3800
Nominal: 2000
Enabled: 112 cores, 2 chips
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 105 MB I+D on chip per chip
Other: None
Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 1 x 1.6 TB PCIE NVME SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
Compiler: Kernel 5.14.21-150400.22-default
C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
Parallel: Yes
Firmware: Version 0401 released Nov-2022
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11(Z13PP-D32) Server System
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECspeed®2017_int_base = 14.7

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 9016

Test Date: Dec-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jan-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2022

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	112	195	9.10	195	9.10	195	9.10	112	175	10.1	176	10.1	176	10.1		
602.gcc_s	112	316	12.6	316	12.6	316	12.6	112	301	13.2	301	13.2	301	13.2		
605.mcf_s	112	205	23.1	204	23.1	204	23.1	112	205	23.1	204	23.1	204	23.1		
620.omnetpp_s	112	133	12.2	134	12.2	133	12.2	112	133	12.2	134	12.2	133	12.2		
623.xalancbmk_s	112	51.8	27.4	51.9	27.3	52.1	27.2	112	51.8	27.4	51.9	27.3	52.1	27.2		
625.x264_s	112	81.8	21.6	81.8	21.6	81.9	21.5	112	79.5	22.2	79.4	22.2	79.3	22.2		
631.deepsjeng_s	112	201	7.14	200	7.17	200	7.15	112	201	7.14	200	7.17	200	7.15		
641.leela_s	112	303	5.64	303	5.64	303	5.64	112	303	5.64	303	5.64	303	5.64		
648.exchange2_s	112	132	22.3	132	22.3	132	22.3	112	132	22.3	132	22.3	132	22.3		
657.xz_s	112	223	27.8	222	27.8	222	27.8	112	223	27.8	222	27.8	222	27.8		
SPECspeed®2017_int_base = 14.7																
SPECspeed®2017_int_peak = 15.0																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
OS set to performance mode via cpupower frequency-set -g performance

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
 KMP_AFFINITY = "granularity=fine,scatter"
 LD_LIBRARY_PATH = "/spec2017/lib/intel64:/spec2017/je5.0.1-64"
 MALLOC_CONF = "retain:true"
 OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11(Z13PP-D32) Server System
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECspeed®2017_int_base = 14.7

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 9016

Test Date: Dec-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jan-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2022

General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

Hyper-Threading = Disable

Engine Boost = Aggressive

SR-IOV Support = Disabled

SNC = Enable SNC2 (2-clusters)

BMC Configuration:

Fan mode = Full speed mode

```
Sysinfo program /spec2017/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d
running on localhost Thu Dec 1 20:52:25 2022
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8480+
  2 "physical id"s (chips)
    112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 56
  siblings : 56
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
  53 54 55
```

From lscpu from util-linux 2.37.2:

Architecture:	x86_64
---------------	--------

CPU op-mode(s):	32-bit, 64-bit
-----------------	----------------

Address sizes:	46 bits physical, 57 bits virtual
----------------	-----------------------------------

Byte Order:	Little Endian
-------------	---------------

CPU(s):	112
---------	-----

On-line CPU(s) list:	0-111
----------------------	-------

Vendor ID:	GenuineIntel
------------	--------------

Model name:	Intel(R) Xeon(R) Platinum 8480+
-------------	---------------------------------

CPU family:	6
-------------	---

Model:	143
--------	-----

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11(Z13PP-D32) Server System
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECspeed®2017_int_base = 14.7

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 9016

Test Date: Dec-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jan-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2022

Platform Notes (Continued)

```

Thread(s) per core: 1
Core(s) per socket: 56
Socket(s): 2
Stepping: 8
CPU max MHz: 3800.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperf mperf tsc_known_freq pn1 pclmulqdq dtes64 monitor ds_cpl vmx
smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_l3 cat_l2 cdp_l3 invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid rtm cqmq rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaved xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp
hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2
gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid
bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize tsxldtrk
pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization: VT-x
L1d cache: 5.3 MiB (112 instances)
L1i cache: 3.5 MiB (112 instances)
L2 cache: 224 MiB (112 instances)
L3 cache: 210 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-27
NUMA node1 CPU(s): 28-55
NUMA node2 CPU(s): 56-83
NUMA node3 CPU(s): 84-111
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user
pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

```

From lscpu --cache:
NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
L1d     48K      5.3M   12 Data        1       64      1          64
L1i     32K      3.5M    8 Instruction  1       64      1          64
L2      224M     224M   16 Unified      2      2048      1          64
L3     105M     210M   15 Unified      3     114688      1          64

```

```
/proc/cpuinfo cache data
cache size : 107520 KB
```

```

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11(Z13PP-D32) Server System
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECspeed®2017_int_base = 14.7

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 9016

Test Date: Dec-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jan-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2022

Platform Notes (Continued)

```
node 0 size: 257682 MB
node 0 free: 256810 MB
node 1 cpus: 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52
53 54 55
node 1 size: 258040 MB
node 1 free: 256510 MB
node 2 cpus: 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80
81 82 83
node 2 size: 258006 MB
node 2 free: 257750 MB
node 3 cpus: 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105
106 107 108 109 110 111
node 3 size: 258011 MB
node 3 free: 257723 MB
node distances:
node 0 1 2 3
0: 10 12 21 21
1: 12 10 21 21
2: 21 21 10 12
3: 21 21 12 10
```

```
From /proc/meminfo
MemTotal: 1056503088 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP4"
  VERSION_ID="15.4"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp4"
```

```
uname -a:
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11(Z13PP-D32) Server System
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECspeed®2017_int_base = 14.7

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 9016

Test Date: Dec-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jan-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2022

Platform Notes (Continued)

run-level 3 Dec 1 17:36

SPEC is set to: /spec2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p8  xfs   1.3T  13G  1.3T   1%  /
```

```
From /sys/devices/virtual/dmi/id
Vendor:          ASUSTeK COMPUTER INC.
Product:         RS720-E11-RS12U
Product Family:  Server
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
16x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800
```

BIOS:

```
BIOS Vendor:      American Megatrends Inc.
BIOS Version:    0401
BIOS Date:       11/18/2022
BIOS Revision:   4.1
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====
```

```
=====
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
      | 641.leela_s(base, peak)
=====
```

```
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====
```

```
=====
Fortran | 648.exchange2_s(base, peak)
=====
```

```
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
=====
```

Base Compiler Invocation

C benchmarks:

icx

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11(Z13PP-D32) Server System
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECspeed®2017_int_base = 14.7

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 9016

Test Date: Dec-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jan-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2022

Base Compiler Invocation (Continued)

C++ benchmarks:

`icpx`

Fortran benchmarks:

`ifx`

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

`-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

C++ benchmarks:

`-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`

Fortran benchmarks:

`-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc`



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11(Z13PP-D32) Server System
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECspeed®2017_int_base = 14.7

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 9016

Test Date: Dec-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jan-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2022

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-strict-overflow -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

605.mcf_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz_s: basepeak = yes

C++ benchmarks:

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

ASUS RS720-E11(Z13PP-D32) Server System
(2.00 GHz, Intel Xeon Platinum 8480+)

SPECspeed®2017_int_base = 14.7

SPECspeed®2017_int_peak = 15.0

CPU2017 License: 9016

Test Date: Dec-2022

Test Sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jan-2023

Tested by: ASUSTeK Computer Inc.

Software Availability: Jun-2022

Peak Optimization Flags (Continued)

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: basepeak = yes

631.deepsjeng_s: basepeak = yes

641.leela_s: basepeak = yes

Fortran benchmarks:

648.exchange2_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.0.html>

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-z13-V1.0.xml>

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.2022-10-12.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-01 07:52:25-0500.

Report generated on 2024-01-29 17:15:02 by CPU2017 PDF formatter v6716.

Originally published on 2023-01-10.