



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

SPECSpeed®2017_int_base = 14.4

SPECSpeed®2017_int_peak = 14.7

CPU2017 License: 6573


Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

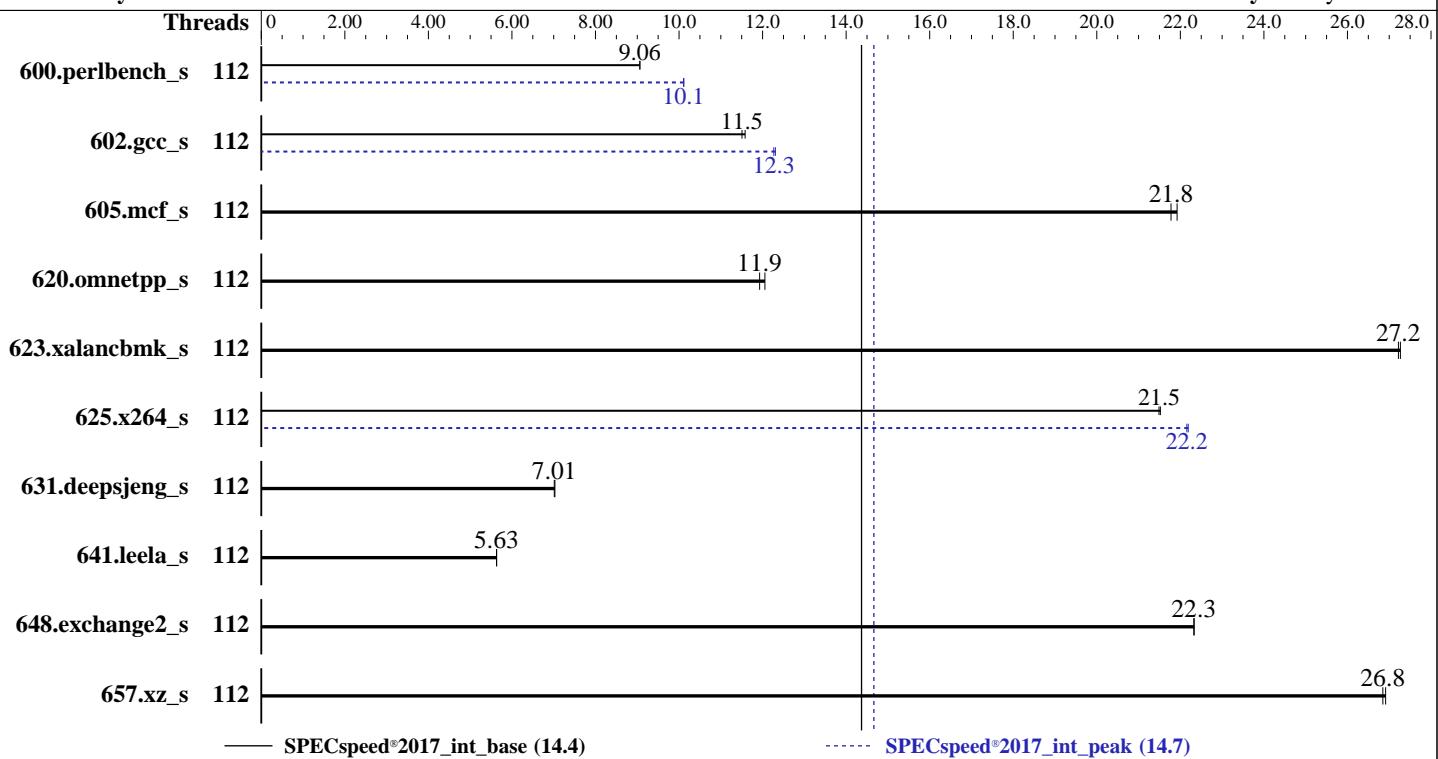

Hardware

CPU Name: Intel Xeon Platinum 8480+
 Max MHz: 3800
 Nominal: 2000
 Enabled: 112 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 125 GB on tmpfs
 Other: None

OS:

Red Hat Enterprise Linux 8.6 (Ootpa)

4.18.0-372.9.1.el8.x86_64

Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;

Parallel:

Yes

Firmware:

Version 0.3.1 released Nov-2022

File System:

tmpfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

64-bit

Other:

jemalloc memory allocator V5.0.1

Power Management:

BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	112	<u>196</u>	<u>9.06</u>	196	9.06			112	<u>176</u>	<u>10.1</u>	175	10.1		
602.gcc_s	112	<u>346</u>	<u>11.5</u>	344	11.6			112	<u>325</u>	<u>12.3</u>	324	12.3		
605.mcf_s	112	<u>217</u>	<u>21.8</u>	215	21.9			112	<u>217</u>	<u>21.8</u>	215	21.9		
620.omnetpp_s	112	<u>137</u>	<u>11.9</u>	135	12.1			112	<u>137</u>	<u>11.9</u>	135	12.1		
623.xalancbmk_s	112	<u>52.1</u>	<u>27.2</u>	52.0	27.3			112	<u>52.1</u>	<u>27.2</u>	52.0	27.3		
625.x264_s	112	<u>82.1</u>	<u>21.5</u>	82.0	21.5			112	<u>79.6</u>	<u>22.2</u>	79.5	22.2		
631.deepsjeng_s	112	<u>204</u>	<u>7.01</u>	204	7.03			112	<u>204</u>	<u>7.01</u>	204	7.03		
641.leela_s	112	<u>303</u>	<u>5.63</u>	303	5.63			112	<u>303</u>	<u>5.63</u>	303	5.63		
648.exchange2_s	112	<u>132</u>	<u>22.3</u>	132	22.3			112	<u>132</u>	<u>22.3</u>	132	22.3		
657.xz_s	112	230	26.9	<u>230</u>	<u>26.8</u>			112	230	26.9	<u>230</u>	<u>26.8</u>		
SPECspeed®2017_int_base = <u>14.4</u>														
SPECspeed®2017_int_peak = <u>14.7</u>														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH =

"/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge MX760c (Intel Xeon Platinum 8480+)

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```
    ADDDC Setting : Disabled
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
    Virtualization Technology : Disabled
        Logical Processor : Disabled
        Sub NUMA Cluster : 2-way Clustering
    DCU Streamer Prefetcher : Disabled
        LLC Prefetch : Disabled
    Dead Line LLC Alloc : Disabled
        Optimizer Mode : Enabled

        System Profile : Custom
    CPU Power Management : Maximum Performance
        C1E : Disabled
        C States : Autonomous
    Memory Patrol Scrub : Disabled
    Energy Efficiency Policy : Performance
        PCI ASPM L1 Link
            Power Management : Disabled
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2022.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Mon Dec 19 09:48:08 2022

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge MX760c (Intel Xeon Platinum 8480+)

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

```
11. Systemd service manager version: systemd 239 (239-58.el8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
-----
-----
1. uname -a
Linux localhost.localdomain 4.18.0-372.9.1.el8.x86_64 #1 SMP Fri Apr 15 22:12:19 EDT 2022 x86_64 x86_64
x86_64 GNU/Linux
-----
2. w
09:48:08 up 2 min, 1 user, load average: 0.77, 0.61, 0.26
USER      TTY      FROM           LOGIN@     IDLE    JCPU   PCPU WHAT
root      ttys1          -          09:47  40.00s  1.04s  0.00s /bin/bash ./dell-norun-specspeed.sh
--iterations 2 --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
-----
3. Username
From environment variable $USER: root
-----
4. ulimit -a
core file size          (blocks, -c) 0
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 4126139
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 4126139
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-norun-main.sh speed
/bin/bash ./dell-norun-main.sh speed
/bin/bash ./dell-norun-specspeed.sh --iterations 2 --output_format csv,html,pdf,txt --define
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

```
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
/bin/bash ./dell-norun-specspeed.sh --iterations 2 --output_format csv,html,pdf,txt --define
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
runcpu --nobuild --action validate --define default-platform-flags -c
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=112 --tune base,peak -o all --define
intspeedaffinity --define drop_caches --iterations 2 --output_format csv,html,pdf,txt --define
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=112 --tune base,peak --output_format all
--define intspeedaffinity --define drop_caches --iterations 2 --output_format csv,html,pdf,txt --define
Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --nopower --runmode speed --tune base:peak --size refspeed intspeed
--nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0
--from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
```

```
-----  
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8480+
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 6
microcode       : 0x2b000111
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 56
siblings         : 56
2 physical ids (chips)
112 processors (hardware threads)
physical id 0: core ids 0-55
physical id 1: core ids 0-55
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102,104,106,108,110
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230,23
2,234,236,238
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.32.1:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Byte Order:              Little Endian
CPU(s):                  112
On-line CPU(s) list:    0-111
Thread(s) per core:     1
Core(s) per socket:      56
Socket(s):                2
NUMA node(s):             4
Vendor ID:               GenuineIntel
BIOS Vendor ID:          Intel
CPU family:                 6
Model:                     143
Model name:               Intel(R) Xeon(R) Platinum 8480+
BIOS Model name:          Intel(R) Xeon(R) Platinum 8480+
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

```

Stepping: 6
CPU MHz: 2000.000
BogoMIPS: 4000.00
L1d cache: 48K
L1i cache: 32K
L2 cache: 2048K
L3 cache: 107520K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100,104,108
NUMA node1 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102,106,110
NUMA node2 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101,105,109
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103,107,111
Flags: fpu vme de pse tsc msr paevme mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
       acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
       arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpfperf
       tsc_known_freq pnipclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16
       xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
       f16c rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
       invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmil
       avx2 smep bmi2 erms invpcid cqmqrdt_a avx512f avx512dq rdseed adx smap avx512ifma
       clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
       xsaves cqmqllc cqmqoccup_llc cqmqmbm_total cqmqmbm_local split_lock_detect avx_vnni
       avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpk
       avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopsndq la57
       rdpid bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize
       tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
-----
```

8. numactl --hardware

```

NOTE: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100,104,108
node 0 size: 257493 MB
node 0 free: 256315 MB
node 1 cpus: 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102,106,110
node 1 size: 258041 MB
node 1 free: 257417 MB
node 2 cpus: 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101,105,109
node 2 size: 258041 MB
node 2 free: 252017 MB
node 3 cpus: 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103,107,111
node 3 size: 257997 MB
node 3 free: 256467 MB
node distances:
node   0   1   2   3
  0: 10 12 21 21
  1: 12 10 21 21
  2: 21 21 10 12
  3: 21 21 12 10
-----
```

9. /proc/meminfo

```

MemTotal: 1056332020 kB
-----
```

10. who -r

```

run-level 3 Dec 19 09:46
-----
```

11. Systemd service manager version: systemd 239 (239-58.el8)

```

Default Target Status
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: May-2022

Platform Notes (Continued)

multi-user running

```
-----  
12. Services, from systemctl list-unit-files  
STATE   UNIT FILES  
enabled  NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd autovt@ crond  
firewalld getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump  
libstoragemgmt loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname  
nvmefc-boot-connections rhsmdcertd rsyslog selinux-autorelabel-mark smartd sshd sssd syslog  
timedatex tuned udisks2 vdo  
disabled arp-ethers blk-availability chrony-dhcp console-getty cpupower debug-shell  
ebtables hwloc-dump-hwdata iprdump iprinit iprupdate ipsec iscsid iscsiuio kpatch kvm_stat ledmon  
man-db-restart-cache-update nftables nvmf-autoconnect oddjobd podman podman-auto-update  
podman-restart psacct rdisc rhcd rhsm rhsm-facts serial-getty@ sshd-keygen@ systemd-resolved tcsd  
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo  
masked  systemd-timedated
```

```
-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=(hd2,gpt2)/vmlinuz-4.18.0-372.9.1.el8.x86_64  
root=/dev/mapper/rhel-root  
ro  
resume=/dev/mapper/rhel-swap  
rd.lvm.lv=rhel/root  
rd.lvm.lv=rhel/swap  
rhgb  
quiet
```

```
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
  Unable to determine current policy  
  boost state support:  
    Supported: yes  
    Active: yes
```

```
-----  
15. tuned-adm active  
Current active profile: throughput-performance
```

```
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       2  
vm.compaction_proactiveness    0  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio      10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs     3000  
vm.dirty_ratio                 40  
vm.dirty_writeback_centisecs   500  
vm.dirtytime_expire_seconds    43200  
vm.extfrag_threshold           500  
vm.min_unmapped_ratio          1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                  10  
vm.watermark_boost_factor      15000  
vm.watermark_scale_factor       10
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge MX760c (Intel Xeon Platinum 8480+)

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

vm.zone_reclaim_mode

0

17. /sys/kernel/mm/transparent_hugepage
defrag always defer defer+madvise [madvise] never
enabled [always] madvise never
hpge_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Red Hat Enterprise Linux 8.6 (Ootpa)
redhat-release Red Hat Enterprise Linux release 8.6 (Ootpa)
system-release Red Hat Enterprise Linux release 8.6 (Ootpa)

20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
itlb_multihit Not affected
l1tf Not affected
mds Not affected
meltdown Not affected
spec_store_bypass Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1 Mitigation: usercopy/swapgs barriers and __user pointer sanitization
spectre_v2 Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds Not affected
tsx_async_abort Not affected
For more information, see the Linux documentation on hardware vulnerabilities, for example
<https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

21. Disk information
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 125G 3.7G 122G 3% /mnt/ramdisk

22. /sys/devices/virtual/dmi/id
Vendor: Dell Inc.
Product: PowerEdge MX760c
Product Family: PowerEdge
Serial: SL6M701

23. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
12x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017_int_base = 14.4

PowerEdge MX760c (Intel Xeon Platinum 8480+)

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

Platform Notes (Continued)

1x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
3x 002C069D002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 0.3.1
BIOS Date: 11/24/2022
BIOS Revision: 0.3

Compiler Version Notes

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base, peak)

=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: May-2022

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64  
602.gcc_s: -DSPEC_LP64  
605.mcf_s: -DSPEC_LP64  
620.omnetpp_s: -DSPEC_LP64  
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX  
625.x264_s: -DSPEC_LP64  
631.deepsjeng_s: -DSPEC_LP64  
641.leela_s: -DSPEC_LP64  
648.exchange2_s: -DSPEC_LP64  
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fno-math-errno  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fno-math-errno  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fno-math-errno  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-fno-standard-realloc-lhs -align array32byte  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: May-2022

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-strict-overflow -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
605.mcf_s: basepeak = yes
```

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

```
657.xz_s: basepeak = yes
```

C++ benchmarks:

```
620.omnetpp_s: basepeak = yes
```

```
623.xalancbmk_s: basepeak = yes
```

```
631.deepsjeng_s: basepeak = yes
```

```
641.leela_s: basepeak = yes
```

Fortran benchmarks:

```
648.exchange2_s: basepeak = yes
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

SPECspeed®2017_int_base = 14.4

SPECspeed®2017_int_peak = 14.7

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.2.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2022-12-19 10:48:08-0500.

Report generated on 2024-01-29 17:18:19 by CPU2017 PDF formatter v6716.

Originally published on 2023-01-17.