



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.70 GHz,AMD EPYC 9334)

SPECspeed®2017\_int\_base = 14.6

SPECspeed®2017\_int\_peak = 14.8

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

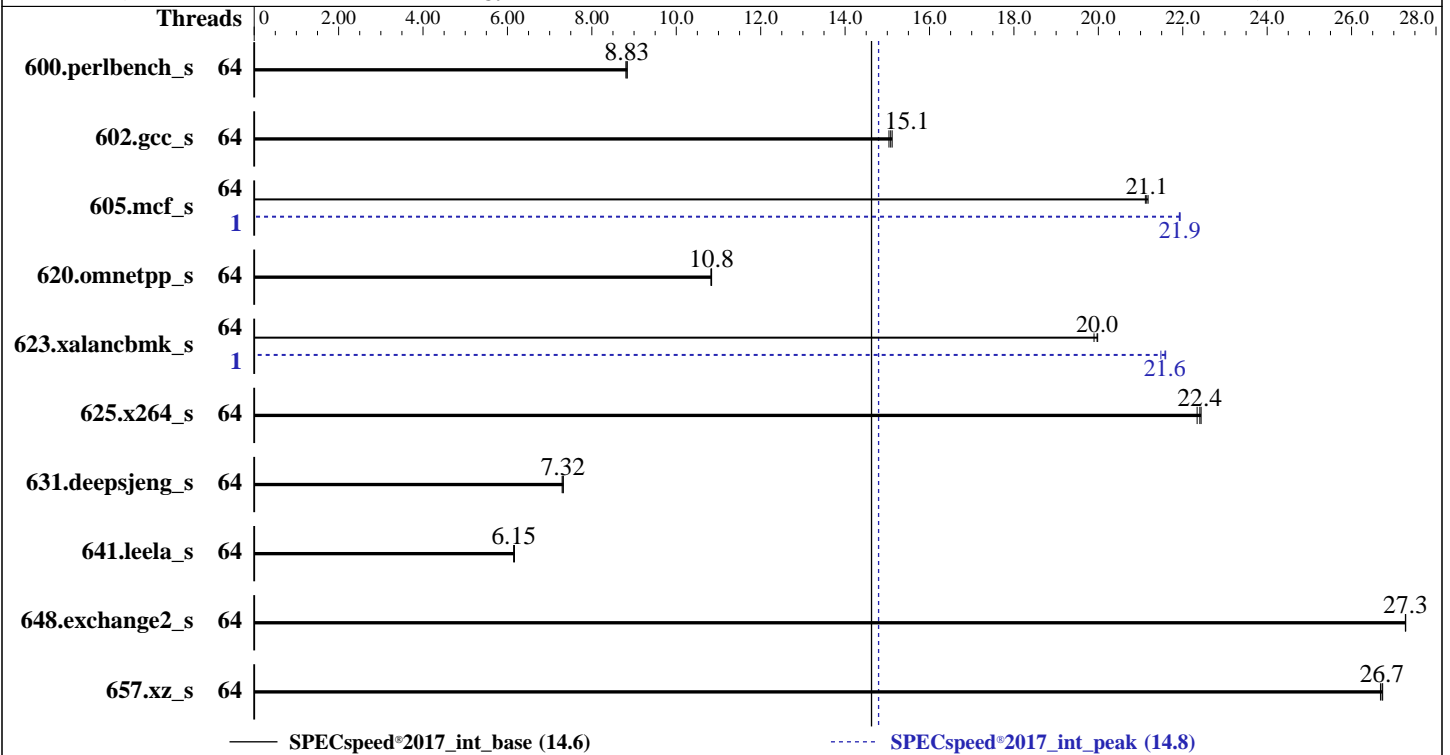

### Hardware

CPU Name: AMD EPYC 9334  
 Max MHz: 3900  
 Nominal: 2700  
 Enabled: 64 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 128 MB I+D on chip per chip,  
 32 MB shared / 8 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version KAE105F 1.20 released Dec-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.70 GHz,AMD EPYC 9334)

SPECspeed®2017\_int\_base = 14.6

SPECspeed®2017\_int\_peak = 14.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Results Table

| Benchmark       | Base    |                    |                    |                   |                    |                    |                    | Peak    |                   |                    |                    |                    |                    |                    |
|-----------------|---------|--------------------|--------------------|-------------------|--------------------|--------------------|--------------------|---------|-------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
|                 | Threads | Seconds            | Ratio              | Seconds           | Ratio              | Seconds            | Ratio              | Threads | Seconds           | Ratio              | Seconds            | Ratio              | Seconds            | Ratio              |
| 600.perlbench_s | 64      | 202                | 8.81               | <b><u>201</u></b> | <b><u>8.83</u></b> | 201                | 8.84               | 64      | 202               | 8.81               | <b><u>201</u></b>  | <b><u>8.83</u></b> | 201                | 8.84               |
| 602.gcc_s       | 64      | 265                | 15.0               | <b><u>264</u></b> | <b><u>15.1</u></b> | 263                | 15.1               | 64      | 265               | 15.0               | <b><u>264</u></b>  | <b><u>15.1</u></b> | 263                | 15.1               |
| 605.mcf_s       | 64      | <b><u>223</u></b>  | <b><u>21.1</u></b> | 224               | 21.1               | 223                | 21.2               | 1       | 215               | 21.9               | <b><u>215</u></b>  | <b><u>21.9</u></b> | 215                | 21.9               |
| 620.omnetpp_s   | 64      | <b><u>151</u></b>  | <b><u>10.8</u></b> | 151               | 10.8               | 151                | 10.8               | 64      | <b><u>151</u></b> | <b><u>10.8</u></b> | 151                | 10.8               | 151                | 10.8               |
| 623.xalancbmk_s | 64      | <b><u>71.0</u></b> | <b><u>20.0</u></b> | 70.9              | 20.0               | 71.2               | 19.9               | 1       | 65.6              | 21.6               | <b><u>65.7</u></b> | <b><u>21.6</u></b> | 66.0               | 21.5               |
| 625.x264_s      | 64      | 78.6               | 22.4               | 79.0              | 22.3               | <b><u>78.7</u></b> | <b><u>22.4</u></b> | 64      | 78.6              | 22.4               | 79.0               | 22.3               | <b><u>78.7</u></b> | <b><u>22.4</u></b> |
| 631.deepsjeng_s | 64      | 196                | 7.32               | <b><u>196</u></b> | <b><u>7.32</u></b> | 196                | 7.30               | 64      | 196               | 7.32               | <b><u>196</u></b>  | <b><u>7.32</u></b> | 196                | 7.30               |
| 641.leela_s     | 64      | <b><u>277</u></b>  | <b><u>6.15</u></b> | 277               | 6.15               | 277                | 6.17               | 64      | <b><u>277</u></b> | <b><u>6.15</u></b> | 277                | 6.15               | 277                | 6.17               |
| 648.exchange2_s | 64      | 108                | 27.3               | 108               | 27.3               | <b><u>108</u></b>  | <b><u>27.3</u></b> | 64      | 108               | 27.3               | 108                | 27.3               | <b><u>108</u></b>  | <b><u>27.3</u></b> |
| 657.xz_s        | 64      | 231                | 26.7               | <b><u>231</u></b> | <b><u>26.7</u></b> | 232                | 26.7               | 64      | 231               | 26.7               | <b><u>231</u></b>  | <b><u>26.7</u></b> | 232                | 26.7               |

SPECspeed®2017\_int\_base = **14.6**

SPECspeed®2017\_int\_peak = **14.8**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.6

ThinkSystem SR665 V3  
(2.70 GHz,AMD EPYC 9334)

SPECspeed®2017\_int\_peak = 14.8

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-63"

LD\_LIBRARY\_PATH =

"/home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/amd\_speed\_aocc400\_genoa\_B\_lib  
/lib:"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "oversize\_threshold:0,retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "64"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "15"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Operating Mode set to Maximum Performance and then set it to Custom Mode

NUMA Nodes per Socket set to NPS4

SMT Mode set to Disabled

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.6

ThinkSystem SR665 V3  
(2.70 GHz,AMD EPYC 9334)

SPECspeed®2017\_int\_peak = 14.8

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

sysinfo program /home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost Tue Dec 20 12:50:48 2022

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 9334 32-Core Processor
 2 "physical id"s (chips)
 64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 32
physical 0: cores 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23 32 33 34 35 36 37 38 39
48 49 50 51 52 53 54 55
physical 1: cores 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23 32 33 34 35 36 37 38 39
48 49 50 51 52 53 54 55
```

From lscpu from util-linux 2.37.2:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 52 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Vendor ID: AuthenticAMD
Model name: AMD EPYC 9334 32-Core Processor
CPU family: 25
Model: 17
Thread(s) per core: 1
Core(s) per socket: 32
Socket(s): 2
Stepping: 1
Frequency boost: enabled
CPU max MHz: 3910.2529
CPU min MHz: 1500.0000
BogoMIPS: 5392.07
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.6

ThinkSystem SR665 V3  
(2.70 GHz,AMD EPYC 9334)

SPECspeed®2017\_int\_peak = 14.8

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

ibpb stibp vmcall fsgsbase bml avx2 smep bmi2 erms invpcid cqm rdt\_a avx512f  
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha\_ni avx512bw  
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total  
cqm\_mbm\_local avx512\_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd\_ppin arat npt  
lbrv svm\_lock nrip\_save tsc\_scale vmcb\_clean flushbyasid decodeassists pausefilter  
pfthreshold avic v\_vmsave\_vmload vgif v\_spec\_ctrl avx512vbmi umip pku ospke  
avx512\_vbmi2 gfni vaes vpclmulqdq avx512\_vnni avx512\_bitalg avx512\_vpopcntdq la57  
rdpid overflow\_recov succor smca fsrm flush\_lli

Virtualization:

AMD-V

L1d cache: 2 MiB (64 instances)

L1i cache: 2 MiB (64 instances)

L2 cache: 64 MiB (64 instances)

L3 cache: 256 MiB (8 instances)

NUMA node(s): 8

NUMA node0 CPU(s): 0-7

NUMA node1 CPU(s): 8-15

NUMA node2 CPU(s): 16-23

NUMA node3 CPU(s): 24-31

NUMA node4 CPU(s): 32-39

NUMA node5 CPU(s): 40-47

NUMA node6 CPU(s): 48-55

NUMA node7 CPU(s): 56-63

Vulnerability Itlb multihit: Not affected

Vulnerability L1tf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP disabled, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 32K      | 2M       | 8    | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 2M       | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 64M      | 8    | Unified     | 2     | 2048  | 1        | 64             |
| L3   | 32M      | 256M     | 16   | Unified     | 3     | 32768 | 1        | 64             |

/proc/cpuinfo cache data  
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.70 GHz,AMD EPYC 9334)

SPECspeed®2017\_int\_base = 14.6

SPECspeed®2017\_int\_peak = 14.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

### Platform Notes (Continued)

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 96379 MB
node 0 free: 95498 MB
node 1 cpus: 8 9 10 11 12 13 14 15
node 1 size: 96752 MB
node 1 free: 96465 MB
node 2 cpus: 16 17 18 19 20 21 22 23
node 2 size: 96752 MB
node 2 free: 96535 MB
node 3 cpus: 24 25 26 27 28 29 30 31
node 3 size: 96752 MB
node 3 free: 96629 MB
node 4 cpus: 32 33 34 35 36 37 38 39
node 4 size: 96752 MB
node 4 free: 96360 MB
node 5 cpus: 40 41 42 43 44 45 46 47
node 5 size: 96752 MB
node 5 free: 96327 MB
node 6 cpus: 48 49 50 51 52 53 54 55
node 6 size: 96717 MB
node 6 free: 96424 MB
node 7 cpus: 56 57 58 59 60 61 62 63
node 7 size: 96557 MB
node 7 free: 96278 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10  12  12  12  32  32  32  32
  1:  12  10  12  12  32  32  32  32
  2:  12  12  10  12  32  32  32  32
  3:  12  12  12  10  32  32  32  32
  4:  32  32  32  32  10  12  12  12
  5:  32  32  32  32  12  10  12  12
  6:  32  32  32  32  12  12  10  12
  7:  32  32  32  32  12  12  12  10

```

```

From /proc/meminfo
MemTotal:      791976596 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.6

ThinkSystem SR665 V3  
(2.70 GHz,AMD EPYC 9334)

SPECspeed®2017\_int\_peak = 14.8

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

```

VERSION="15-SP4"
VERSION_ID="15.4"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp4"

```

```

uname -a:
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux

```

Kernel self-reported vulnerability status:

|  |  |
|--|--|
| CVE-2018-12207 (iTLB Multihit):                        | Not affected   |
| CVE-2018-3620 (L1 Terminal Fault):                     | Not affected   |
| Microarchitectural Data Sampling:                      | Not affected   |
| CVE-2017-5754 (Meltdown):                              | Not affected   |
| CVE-2018-3639 (Speculative Store Bypass):              | Mitigation: Speculative Store Bypass disabled via prctl and seccomp              |
| CVE-2017-5753 (Spectre variant 1):                     | Mitigation: usercopy/swapgs barriers and __user pointer sanitization             |
| CVE-2017-5715 (Spectre variant 2):                     | Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling |
| CVE-2020-0543 (Special Register Buffer Data Sampling): | Not affected   |
| CVE-2019-11135 (TSX Asynchronous Abort):               | Not affected   |

run-level 3 Dec 20 06:22

```

SPEC is set to: /home/cpu2017-1.1.8-amd-aocc400-genoa-Blb
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   446G  31G  416G   7% /

```

```

From /sys/devices/virtual/dmi/id
Vendor:          Lenovo
Product:         ThinkSystem SR665 V3 MB,Genoa,Kauai,DDR5,Kauai,2U
Product Family: ThinkSystem
Serial:          1234567890

```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 14.6

ThinkSystem SR665 V3  
(2.70 GHz,AMD EPYC 9334)

SPECspeed®2017\_int\_peak = 14.8

CPU2017 License: 9017

Test Date: Dec-2022

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

5x SK Hynix HMC88AE88A115N 32 GB 2 rank 4800  
19x SK Hynix HMC88AE88A168N 32 GB 2 rank 4800

#### BIOS:

BIOS Vendor: Lenovo  
BIOS Version: KAE105F-1.20  
BIOS Date: 12/01/2022  
BIOS Revision: 1.20  
Firmware Revision: 1.20

(End of data from sysinfo program)

### Compiler Version Notes

=====  
C | 600.perlbench\_s(base, peak) 602.gcc\_s(base, peak) 605.mcf\_s(base,  
| peak) 625.x264\_s(base, peak) 657.xz\_s(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
C++ | 620.omnetpp\_s(base, peak) 623.xalanbmk\_s(base, peak)  
| 631.deepsjeng\_s(base, peak) 641.leela\_s(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

=====  
Fortran | 648.exchange2\_s(base, peak)  
-----

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on  
LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3  
(2.70 GHz,AMD EPYC 9334)

SPECspeed®2017\_int\_base = 14.6

SPECspeed®2017\_int\_peak = 14.8

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

```
600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECspeed®2017\_int\_base = 14.6

ThinkSystem SR665 V3  
(2.70 GHz,AMD EPYC 9334)

SPECspeed®2017\_int\_peak = 14.8

**CPU2017 License:** 9017

**Test Date:** Dec-2022

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Feb-2023

**Tested by:** Lenovo Global Technology

**Software Availability:** Nov-2022

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp  
-lomp -lamdlibm -lflang -lamdalloc

## Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.70 GHz,AMD EPYC 9334)

SPECspeed®2017\_int\_base = 14.6

SPECspeed®2017\_int\_peak = 14.8

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2022

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

602.gcc\_s: basepeak = yes

605.mcf\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto  
-fstruct-layout=9 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264\_s: basepeak = yes

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-flto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC\_OPENMP -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR665 V3  
(2.70 GHz,AMD EPYC 9334)

SPECspeed®2017\_int\_base = 14.6

SPECspeed®2017\_int\_peak = 14.8

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Dec-2022

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-O.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-O.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-12-19 23:50:47-0500.

Report generated on 2023-01-17 18:45:25 by CPU2017 PDF formatter v6442.

Originally published on 2023-01-17.