



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R6615 (AMD EPYC 9654P 96-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.


SPECspeed®2017\_fp\_base = 311

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

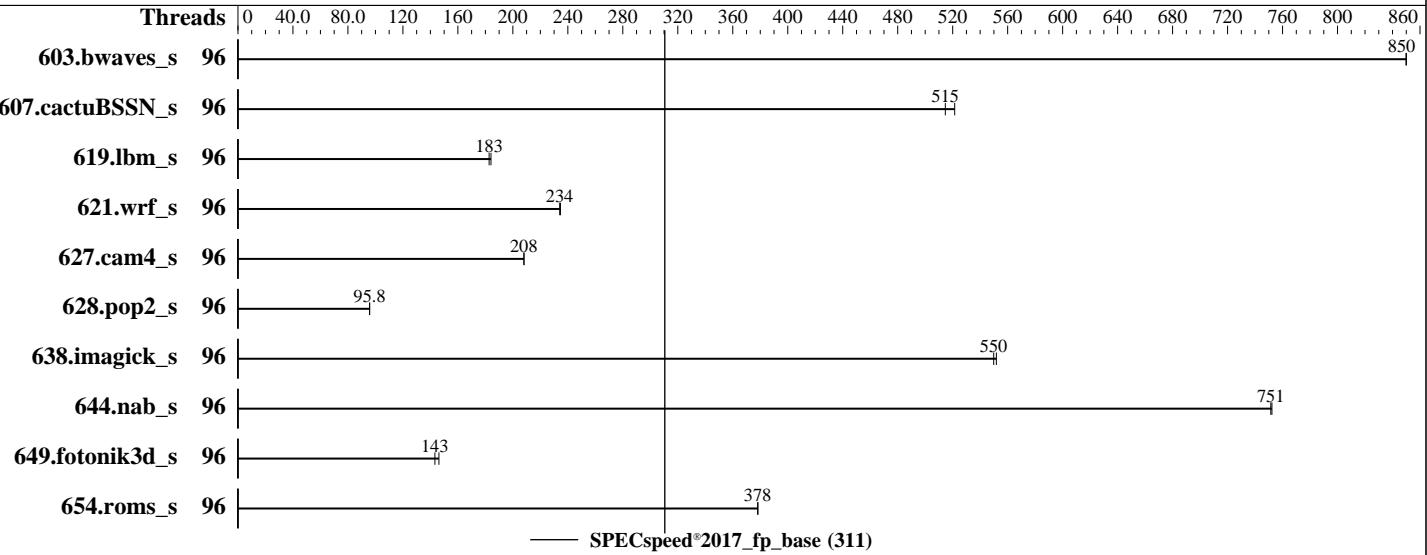

— SPECspeed®2017\_fp\_base (311)

## Hardware

CPU Name: AMD EPYC 9654P  
Max MHz: 3700  
Nominal: 2400  
Enabled: 96 cores, 1 chip  
Orderable: 1 chip  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 384 MB I+D on chip per chip, 32 MB shared / 8 cores  
Other: None  
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 125 GB on tmpfs  
Other: None

## Software

OS: Ubuntu 22.04.1 LTS  
Compiler: 5.15.0-46-generic  
Parallel: C/C++/Fortran: Version 4.0.0 of AOCC  
Firmware: Yes  
File System: Version 0.5.3 released Nov-2022  
System State: tmpfs  
Base Pointers: Run level 3 (multi-user)  
Peak Pointers: 64-bit  
Other: Not Applicable  
Power Management: None  
BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 311

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Results Table

| Benchmark       | Base    |             |            |             |             |         |         |       | Peak    |       |         |         |       |         |       |         |
|-----------------|---------|-------------|------------|-------------|-------------|---------|---------|-------|---------|-------|---------|---------|-------|---------|-------|---------|
|                 | Threads | Seconds     | Ratio      | Seconds     | Ratio       | Threads | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Threads |
| 603.bwaves_s    | 96      | <b>69.4</b> | <b>850</b> | 69.4        | 850         |         |         |       |         |       |         |         |       |         |       |         |
| 607.cactuBSSN_s | 96      | 32.0        | 521        | <u>32.4</u> | <u>515</u>  |         |         |       |         |       |         |         |       |         |       |         |
| 619.lbm_s       | 96      | <b>28.7</b> | <b>183</b> | 28.5        | 184         |         |         |       |         |       |         |         |       |         |       |         |
| 621.wrf_s       | 96      | 56.4        | 235        | <u>56.5</u> | <u>234</u>  |         |         |       |         |       |         |         |       |         |       |         |
| 627.cam4_s      | 96      | <b>42.6</b> | <b>208</b> | 42.6        | 208         |         |         |       |         |       |         |         |       |         |       |         |
| 628.pop2_s      | 96      | 124         | 95.8       | <u>124</u>  | <u>95.8</u> |         |         |       |         |       |         |         |       |         |       |         |
| 638.imagick_s   | 96      | <b>26.2</b> | <b>550</b> | 26.1        | 552         |         |         |       |         |       |         |         |       |         |       |         |
| 644.nab_s       | 96      | <b>23.3</b> | <b>751</b> | 23.2        | 752         |         |         |       |         |       |         |         |       |         |       |         |
| 649.fotonik3d_s | 96      | 62.3        | 146        | <u>63.6</u> | <u>143</u>  |         |         |       |         |       |         |         |       |         |       |         |
| 654.roms_s      | 96      | <b>41.6</b> | <b>378</b> | 41.6        | 378         |         |         |       |         |       |         |         |       |         |       |         |

SPECspeed®2017\_fp\_base = 311

SPECspeed®2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9654P 96-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 311

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

To always enable THP for peak runs of:

603.bwaves\_s, 607.cactubSSN\_s, 619.lbm\_s, 627.cam4\_s, 628.pop2\_s, 638.imagick\_s, 644.nab\_s, 649.fotonik3d\_s:  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

To disable THP for peak runs of 621.wrf\_s:

'echo never > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

To enable THP only on request for peak runs of 654.roms\_s:

'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent\_hugepage/defrag'  
run as root.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-95"
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b/amd_speed_aocc400_genoa_B_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "96"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9654P 96-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 311

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Platform Notes

BIOS settings:

```

        DRAM Refresh Delay : Performance
        DIMM Self Healing on
        Uncorrectable Memory Error : Disabled
        Logical Processor : Disabled
        Virtualization Technology : Disabled
        L3 Cache as NUMA Domain : Enabled

        System Profile : Custom
        C-States : Disabled
        Memory Patrol Scrub : Disabled
        PCI ASPM L1 Link
        Power Management : Disabled
        Determinism Slider : Power Determinism
        Algorithm Performance
        Boost Disable (ApbDis) : Enabled
    
```

```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
running on amd-sut Sun Nov 13 17:13:51 2022
    
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : AMD EPYC 9654P 96-Core Processor
  1 "physical id"s (chips)
  96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 96
siblings : 96
physical 0: cores 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23 32 33 34 35 36 37 38 39
  48 49 50 51 52 53 54 55 64 65 66 67 68 69 70 71 80 81 82 83 84 85 86 87 96 97 98 99
  100 101 102 103 112 113 114 115 116 117 118 119 128 129 130 131 132 133 134 135 144
  145 146 147 148 149 150 151 160 161 162 163 164 165 166 167 176 177 178 179 180 181
  182 183
    
```

From lscpu from util-linux 2.37.2:

|                      |                                   |
|----------------------|-----------------------------------|
| Architecture:        | x86_64                            |
| CPU op-mode(s):      | 32-bit, 64-bit                    |
| Address sizes:       | 52 bits physical, 57 bits virtual |
| Byte Order:          | Little Endian                     |
| CPU(s):              | 96                                |
| On-line CPU(s) list: | 0-95                              |

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9654P 96-Core Processor)

**SPECspeed®2017\_fp\_base = 311**

**SPECspeed®2017\_fp\_peak = Not Run**

**CPU2017 License:** 6573

**Test Date:** Nov-2022

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Feb-2023

**Tested by:** Dell Inc.

**Software Availability:** Nov-2022

## Platform Notes (Continued)

|                              |  |
|------------------------------|--|
| Vendor ID:                   | AuthenticAMD   |
| Model name:                  | AMD EPYC 9654P 96-Core Processor   |
| CPU family:                  | 25   |
| Model:                       | 17   |
| Thread(s) per core:          | 1  |
| Core(s) per socket:          | 96   |
| Socket(s):                   | 1  |
| Stepping:                    | 1  |
| Frequency boost:             | enabled  |
| CPU max MHz:                 | 3709.0000  |
| CPU min MHz:                 | 400.0000   |
| BogoMIPS:                    | 4801.51  |
| Flags:                       | fpu vme de pse tsc msr pae mce cx8 apic sep mtrr<br>pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt<br>pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid<br>aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe<br>popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a<br>misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb<br>bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs<br>ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f<br>avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw<br>avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total<br>cqmq_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat<br>npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists<br>pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku<br>ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq<br>la57 rdpid overflow_recov succor smca fsrm flush_ll1d |
| Virtualization:              | AMD-V  |
| L1d cache:                   | 3 MiB (96 instances)   |
| L1i cache:                   | 3 MiB (96 instances)   |
| L2 cache:                    | 96 MiB (96 instances)  |
| L3 cache:                    | 384 MiB (12 instances)   |
| NUMA node(s):                | 12   |
| NUMA node0 CPU(s):           | 0-7  |
| NUMA node1 CPU(s):           | 32-39  |
| NUMA node2 CPU(s):           | 64-71  |
| NUMA node3 CPU(s):           | 16-23  |
| NUMA node4 CPU(s):           | 48-55  |
| NUMA node5 CPU(s):           | 80-87  |
| NUMA node6 CPU(s):           | 24-31  |
| NUMA node7 CPU(s):           | 56-63  |
| NUMA node8 CPU(s):           | 88-95  |
| NUMA node9 CPU(s):           | 8-15   |
| NUMA node10 CPU(s):          | 40-47  |
| NUMA node11 CPU(s):          | 72-79  |
| Vulnerability Itlb multihit: | Not affected   |
| Vulnerability L1tf:          | Not affected   |

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9654P 96-Core Processor)

SPECspeed®2017\_fp\_base = 311

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

|                                  |  |
|----------------------------------|--|
| Vulnerability Mds:               | Not affected   |
| Vulnerability Meltdown:          | Not affected   |
| Vulnerability Mmio stale data:   | Not affected   |
| Vulnerability Retbleed:          | Not affected   |
| Vulnerability Spec store bypass: | Mitigation; Speculative Store Bypass disabled via prctl and seccomp            |
| Vulnerability Spectre v1:        | Mitigation; usercopy/swapgs barriers and __user pointer sanitization           |
| Vulnerability Spectre v2:        | Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling |
| Vulnerability Srbds:             | Not affected   |
| Vulnerability Tsx async abort:   | Not affected   |

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 32K      | 3M       | 8    | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 3M       | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 96M      | 8    | Unified     | 2     | 2048  | 1        | 64             |
| L3   | 32M      | 384M     | 16   | Unified     | 3     | 32768 | 1        | 64             |

/proc/cpuinfo cache data  
cache size : 1024 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

|                                      |
|--------------------------------------|
| available: 12 nodes (0-11)           |
| node 0 cpus: 0 1 2 3 4 5 6 7         |
| node 0 size: 64055 MB                |
| node 0 free: 63593 MB                |
| node 1 cpus: 32 33 34 35 36 37 38 39 |
| node 1 size: 64509 MB                |
| node 1 free: 64247 MB                |
| node 2 cpus: 64 65 66 67 68 69 70 71 |
| node 2 size: 64509 MB                |
| node 2 free: 64240 MB                |
| node 3 cpus: 16 17 18 19 20 21 22 23 |
| node 3 size: 64509 MB                |
| node 3 free: 64224 MB                |
| node 4 cpus: 48 49 50 51 52 53 54 55 |
| node 4 size: 64509 MB                |
| node 4 free: 64241 MB                |
| node 5 cpus: 80 81 82 83 84 85 86 87 |
| node 5 size: 64509 MB                |
| node 5 free: 64276 MB                |
| node 6 cpus: 24 25 26 27 28 29 30 31 |
| node 6 size: 64509 MB                |
| node 6 free: 64191 MB                |

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 311

SPECspeed®2017\_fp\_peak = Not Run

PowerEdge R6615 (AMD EPYC 9654P 96-Core Processor)

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

```
node 7 cpus: 56 57 58 59 60 61 62 63
node 7 size: 64509 MB
node 7 free: 64275 MB
node 8 cpus: 88 89 90 91 92 93 94 95
node 8 size: 64463 MB
node 8 free: 64229 MB
node 9 cpus: 8 9 10 11 12 13 14 15
node 9 size: 64509 MB
node 9 free: 64285 MB
node 10 cpus: 40 41 42 43 44 45 46 47
node 10 size: 64474 MB
node 10 free: 64209 MB
node 11 cpus: 72 73 74 75 76 77 78 79
node 11 size: 64509 MB
node 11 free: 60644 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9   10  11
  0: 10 11 11 11 11 11 11 11 11 11 11 11
  1: 11 10 11 11 11 11 11 11 11 11 11 11
  2: 11 11 10 11 11 11 11 11 11 11 11 11
  3: 11 11 11 10 11 11 11 11 11 11 11 11
  4: 11 11 11 11 10 11 11 11 11 11 11 11
  5: 11 11 11 11 11 10 11 11 11 11 11 11
  6: 11 11 11 11 11 11 10 11 11 11 11 11
  7: 11 11 11 11 11 11 11 10 11 11 11 11
  8: 11 11 11 11 11 11 11 11 10 11 11 11
  9: 11 11 11 11 11 11 11 11 11 10 11 11
 10: 11 11 11 11 11 11 11 11 11 11 10 11
 11: 11 11 11 11 11 11 11 11 11 11 11 10
```

```
From /proc/meminfo
MemTotal:      792149164 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
/sbin/tuned-adm active
Current active profile: latency-performance
```

```
/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance
```

```
/usr/bin/lsb_release -d
Ubuntu 22.04.1 LTS
```

```
From /etc/*release* /etc/*version*
debian_version: bookworm/sid
os-release:
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9654P 96-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 311

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

```
PRETTY_NAME="Ubuntu 22.04.1 LTS"
NAME="Ubuntu"
VERSION_ID="22.04"
VERSION="22.04.1 LTS (Jammy Jellyfish)"
VERSION_CODENAME=jammy
ID=ubuntu
ID_LIKE=debian
HOME_URL="https://www.ubuntu.com/"
```

```
uname -a:
Linux amd-sut 5.15.0-46-generic #49-Ubuntu SMP Thu Aug 4 18:03:25 UTC 2022 x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

|  |  |
|--|--|
| CVE-2018-12207 (iTLB Multihit):                        | Not affected   |
| CVE-2018-3620 (L1 Terminal Fault):                     | Not affected   |
| Microarchitectural Data Sampling:                      | Not affected   |
| CVE-2017-5754 (Meltdown):                              | Not affected   |
| mmio_stale_data:                                       | Not affected   |
| retbleed:  | Not affected   |
| CVE-2018-3639 (Speculative Store Bypass):              | Mitigation: Speculative Store Bypass disabled via prctl and seccomp              |
| CVE-2017-5753 (Spectre variant 1):                     | Mitigation: usercopy/swaps barriers and __user pointer sanitization              |
| CVE-2017-5715 (Spectre variant 2):                     | Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling |
| CVE-2020-0543 (Special Register Buffer Data Sampling): | Not affected   |
| CVE-2019-11135 (TSX Asynchronous Abort):               | Not affected   |

run-level 3 Nov 13 03:04

```
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.8-aocc400-B1b
Filesystem      Type   Size  Used Avail Use% Mounted on
tmpfs          tmpfs  125G  3.4G  122G   3% /mnt/ramdisk
```

```
From /sys/devices/virtual/dmi/id
Vendor:          Dell Inc.
Product:         PowerEdge R6615
Product Family:  PowerEdge
Serial:          GLM4018
```

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9654P 96-Core Processor)

SPECspeed®2017\_fp\_base = 311

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800

BIOS:

BIOS Vendor: Dell Inc.  
BIOS Version: 0.5.3  
BIOS Date: 11/10/2022  
BIOS Revision: 0.5

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C           | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----

=====
C++, C, Fortran | 607.cactuBSSN_s(base)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 311

SPECspeed®2017\_fp\_peak = Not Run

PowerEdge R6615 (AMD EPYC 9654P 96-Core Processor)

CPU2017 License: 6573

Test Date: Nov-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====  
Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9654P 96-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 311

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Base Portability Flags (Continued)

621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64

628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64

638.imagick\_s: -DSPEC\_LP64

644.nab\_s: -DSPEC\_LP64

649.fotonik3d\_s: -DSPEC\_LP64

654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6615 (AMD EPYC 9654P 96-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 311

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Nov-2022

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-11-13 12:13:50-0500.

Report generated on 2023-02-01 18:19:44 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.