



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology


ThinkSystem SR645 V3  
(2.50 GHz,AMD EPYC 9224)

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Jan-2023  
Hardware Availability: Feb-2023  
Software Availability: Nov-2022

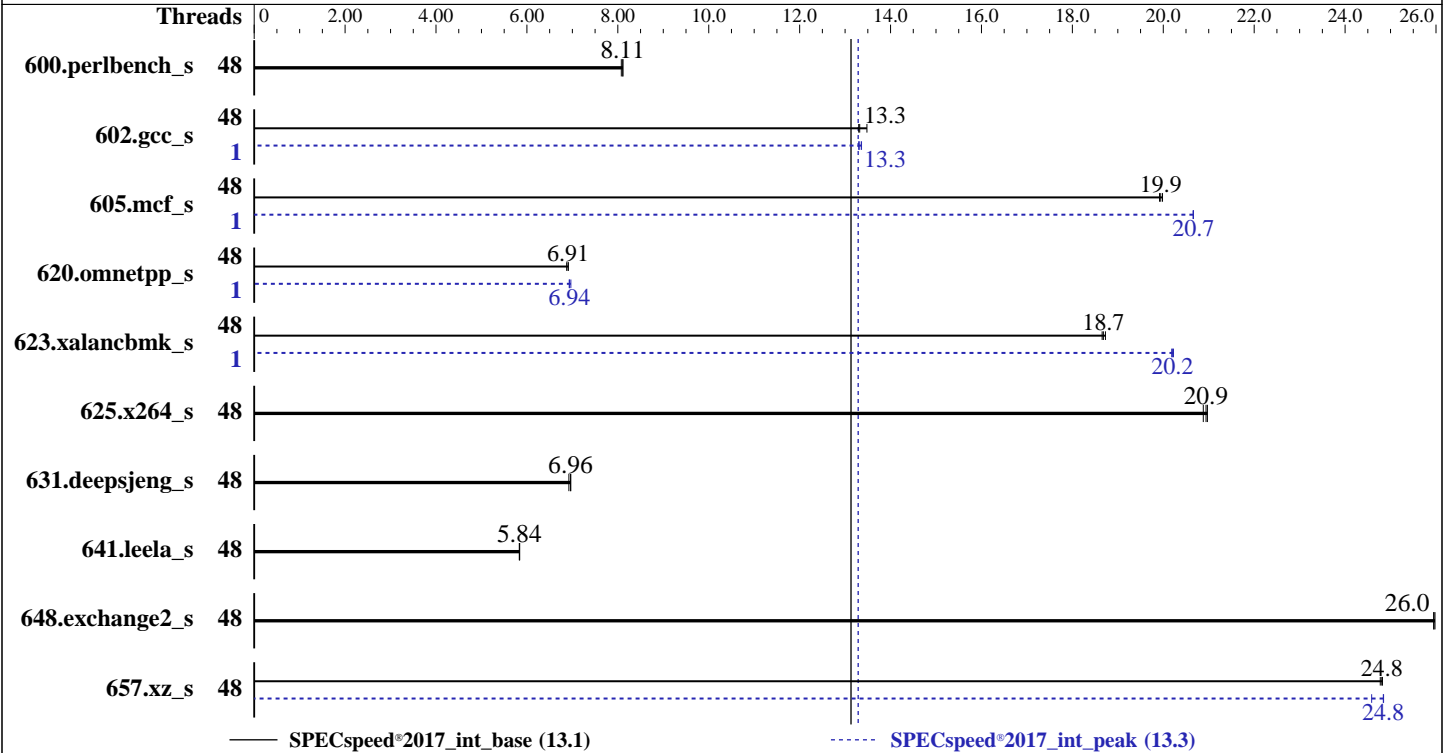

### Hardware

CPU Name: AMD EPYC 9224  
 Max MHz: 3700  
 Nominal: 2500  
 Enabled: 48 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 64 MB I+D on chip per chip,  
 16 MB shared / 6 cores  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86\_64)  
 Kernel 5.14.21-150400.22-default  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version KAE105L 1.20 released Dec-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(2.50 GHz,AMD EPYC 9224)

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

## Results Table

| Benchmark       | Base    |            |             |            |             |             |             | Peak    |            |             |             |             |             |             |
|-----------------|---------|------------|-------------|------------|-------------|-------------|-------------|---------|------------|-------------|-------------|-------------|-------------|-------------|
|                 | Threads | Seconds    | Ratio       | Seconds    | Ratio       | Seconds     | Ratio       | Threads | Seconds    | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       |
| 600.perlbench_s | 48      | 220        | 8.08        | 219        | 8.11        | <b>219</b>  | <b>8.11</b> | 48      | 220        | 8.08        | 219         | 8.11        | <b>219</b>  | <b>8.11</b> |
| 602.gcc_s       | 48      | <b>299</b> | <b>13.3</b> | 295        | 13.5        | 299         | 13.3        | 1       | <b>299</b> | <b>13.3</b> | 298         | 13.4        | 299         | 13.3        |
| 605.mcf_s       | 48      | 237        | 19.9        | 236        | 20.0        | <b>237</b>  | <b>19.9</b> | 1       | 229        | 20.7        | <b>228</b>  | <b>20.7</b> | 228         | 20.7        |
| 620.omnetpp_s   | 48      | 237        | 6.87        | <b>236</b> | <b>6.91</b> | 236         | 6.91        | 1       | <b>235</b> | <b>6.94</b> | 235         | 6.93        | 234         | 6.97        |
| 623.xalancbmk_s | 48      | 76.0       | 18.7        | 75.7       | 18.7        | <b>75.8</b> | <b>18.7</b> | 1       | 70.1       | 20.2        | <b>70.1</b> | <b>20.2</b> | 70.2        | 20.2        |
| 625.x264_s      | 48      | 84.5       | 20.9        | 84.1       | 21.0        | <b>84.2</b> | <b>20.9</b> | 48      | 84.5       | 20.9        | 84.1        | 21.0        | <b>84.2</b> | <b>20.9</b> |
| 631.deepsjeng_s | 48      | 207        | 6.92        | 206        | 6.96        | <b>206</b>  | <b>6.96</b> | 48      | 207        | 6.92        | 206         | 6.96        | <b>206</b>  | <b>6.96</b> |
| 641.leela_s     | 48      | 292        | 5.84        | <b>292</b> | <b>5.84</b> | 292         | 5.83        | 48      | 292        | 5.84        | <b>292</b>  | <b>5.84</b> | 292         | 5.83        |
| 648.exchange2_s | 48      | 113        | 25.9        | <b>113</b> | <b>26.0</b> | 113         | 26.0        | 48      | 113        | 25.9        | <b>113</b>  | <b>26.0</b> | 113         | 26.0        |
| 657.xz_s        | 48      | 250        | 24.8        | <b>249</b> | <b>24.8</b> | 249         | 24.8        | 48      | 249        | 24.8        | <b>249</b>  | <b>24.8</b> | 251         | 24.6        |

SPECspeed®2017\_int\_base = **13.1**

SPECspeed®2017\_int\_peak = **13.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(2.50 GHz,AMD EPYC 9224)

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

### Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.

### Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP\_CPU\_AFFINITY = "0-47"

LD\_LIBRARY\_PATH =

"/home/cpu2017-1.1.8-amd-aocc400-genoa-B1b/amd\_speed\_aocc400\_genoa\_B\_lib  
/lib:"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "0"

MALLOC\_CONF = "oversize\_threshold:0,retain:true"

OMP\_DYNAMIC = "false"

OMP\_SCHEDULE = "static"

OMP\_STACKSIZE = "128M"

OMP\_THREAD\_LIMIT = "48"

Environment variables set by runcpu during the 602.gcc\_s peak run:

GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 605.mcf\_s peak run:

GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp\_s peak run:

GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk\_s peak run:

GOMP\_CPU\_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz\_s peak run:

GOMP\_CPU\_AFFINITY = "0-47"

LIBOMP\_NUM\_HIDDEN\_HELPER\_THREADS = "8"

### General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 13.1

ThinkSystem SR645 V3  
(2.50 GHz,AMD EPYC 9224)

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Nov-2022

### Platform Notes

BIOS configuration:  
Operating Mode set to Maximum Performance and then set it to Custom Mode  
NUMA Nodes per Socket set to NPS4  
SMT Mode set to Disabled

Sysinfo program /home/cpu2017-1.1.8-amd-aocc400-genoa-Blb/bin/sysinfo  
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d  
running on localhost Mon Jan 23 12:18:19 2023

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : AMD EPYC 9224 24-Core Processor
 2 "physical id"s (chips)
 48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 24
  siblings      : 24
 physical 0:    cores 0 1 2 3 4 5 16 17 18 19 20 21 32 33 34 35 36 37 48 49 50 51 52 53
 physical 1:    cores 0 1 2 3 4 5 16 17 18 19 20 21 32 33 34 35 36 37 48 49 50 51 52 53
```

```
From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:   0-47
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9224 24-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:    1
Core(s) per socket:    24
Socket(s):              2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           3706.0540
CPU min MHz:           1500.0000
BogoMIPS:              4992.59
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush mmx fxsr sse2 ht syscall nx mmxext fxsr_opt
pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid
aperfmpperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 13.1

ThinkSystem SR645 V3  
(2.50 GHz,AMD EPYC 9224)

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

```

popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a
misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb
bpxt perfctr_llc mwaitx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs
ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a avx512f
avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw
avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq la57
rdpid overflow_recov succor smca fsrm flush_lld

```

```

Virtualization: AMD-V
L1d cache: 1.5 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 48 MiB (48 instances)
L3 cache: 128 MiB (8 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-5
NUMA node1 CPU(s): 6-11
NUMA node2 CPU(s): 12-17
NUMA node3 CPU(s): 18-23
NUMA node4 CPU(s): 24-29
NUMA node5 CPU(s): 30-35
NUMA node6 CPU(s): 36-41
NUMA node7 CPU(s): 42-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user
pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW,
STIBP disabled, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS  | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d  | 32K      | 1.5M     | 8    | Data        | 1     | 64    | 1        | 64             |
| L1i  | 32K      | 1.5M     | 8    | Instruction | 1     | 64    | 1        | 64             |
| L2   | 1M       | 48M      | 8    | Unified     | 2     | 2048  | 1        | 64             |
| L3   | 16M      | 128M     | 16   | Unified     | 3     | 16384 | 1        | 64             |

```

/proc/cpuinfo cache data
cache size : 1024 KB

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 13.1

ThinkSystem SR645 V3  
(2.50 GHz,AMD EPYC 9224)

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 4 5
node 0 size: 96505 MB
node 0 free: 95477 MB
node 1 cpus: 6 7 8 9 10 11
node 1 size: 96752 MB
node 1 free: 96467 MB
node 2 cpus: 12 13 14 15 16 17
node 2 size: 96752 MB
node 2 free: 96534 MB
node 3 cpus: 18 19 20 21 22 23
node 3 size: 96752 MB
node 3 free: 96524 MB
node 4 cpus: 24 25 26 27 28 29
node 4 size: 96752 MB
node 4 free: 96375 MB
node 5 cpus: 30 31 32 33 34 35
node 5 size: 96752 MB
node 5 free: 96553 MB
node 6 cpus: 36 37 38 39 40 41
node 6 size: 96752 MB
node 6 free: 96516 MB
node 7 cpus: 42 43 44 45 46 47
node 7 size: 96523 MB
node 7 free: 96332 MB
node distances:
node  0  1  2  3  4  5  6  7
 0: 10 12 12 12 32 32 32 32
 1: 12 10 12 12 32 32 32 32
 2: 12 12 10 12 32 32 32 32
 3: 12 12 12 10 32 32 32 32
 4: 32 32 32 32 10 12 12 12
 5: 32 32 32 32 12 10 12 12
 6: 32 32 32 32 12 12 10 12
 7: 32 32 32 32 12 12 12 10

```

From /proc/meminfo

```

MemTotal: 792105848 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 13.1

ThinkSystem SR645 V3  
(2.50 GHz,AMD EPYC 9224)

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

### Platform Notes (Continued)

From /etc/\*release\* /etc/\*version\*

os-release:

```
NAME="SLES"
VERSION="15-SP4"
VERSION_ID="15.4"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP4"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp4"
```

uname -a:

```
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18
UTC 2022 (49db222) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

|  |  |
|--|--|
| CVE-2018-12207 (iTLB Multihit):                        | Not affected   |
| CVE-2018-3620 (L1 Terminal Fault):                     | Not affected   |
| Microarchitectural Data Sampling:                      | Not affected   |
| CVE-2017-5754 (Meltdown):                              | Not affected   |
| CVE-2018-3639 (Speculative Store Bypass):              | Mitigation: Speculative Store Bypass disabled via prctl and seccomp              |
| CVE-2017-5753 (Spectre variant 1):                     | Mitigation: usercopy/swapgs barriers and __user pointer sanitization             |
| CVE-2017-5715 (Spectre variant 2):                     | Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling |
| CVE-2020-0543 (Special Register Buffer Data Sampling): | Not affected   |
| CVE-2019-11135 (TSX Asynchronous Abort):               | Not affected   |

run-level 3 Jan 23 12:16

SPEC is set to: /home/cpu2017-1.1.8-amd-aocc400-genoa-B1b

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sdb3  | xfs  | 442G | 46G  | 397G  | 11%  | /          |

From /sys/devices/virtual/dmi/id

```
Vendor: Lenovo
Product: ThinkSystem SR645 V3 MB,Genoa,DDR5,Oahu,1U
Product Family: ThinkSystem
Serial: 1234567890
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 13.1

ThinkSystem SR645 V3  
(2.50 GHz,AMD EPYC 9224)

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2023  
**Hardware Availability:** Feb-2023  
**Software Availability:** Nov-2022

### Platform Notes (Continued)

allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

7x SK Hynix HMC88AE8B115N 32 GB 2 rank 4800  
17x SK Hynix HMC88AE8B168N 32 GB 2 rank 4800

BIOS:

BIOS Vendor: Lenovo  
BIOS Version: KAE105L-1.20  
BIOS Date: 12/29/2022  
BIOS Revision: 1.20  
Firmware Revision: 1.20

(End of data from sysinfo program)

### Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
-----
```

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

```
=====  
C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)  
      | 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)  
-----
```

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

```
=====  
Fortran | 648.exchange2_s(base, peak)  
-----
```

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECspeed®2017\_int\_base = 13.1

ThinkSystem SR645 V3  
(2.50 GHz,AMD EPYC 9224)

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Compiler Version Notes (Continued)

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LINUX -DSPEC\_LP64  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fopenmp -flt0 -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC\_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang  
-lamdalloc

C++ benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017\_int\_base = 13.1

ThinkSystem SR645 V3  
(2.50 GHz,AMD EPYC 9224)

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR645 V3  
(2.50 GHz,AMD EPYC 9224)

SPECspeed®2017\_int\_base = 13.1

SPECspeed®2017\_int\_peak = 13.3

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Jan-2023

**Hardware Availability:** Feb-2023

**Software Availability:** Nov-2022

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

600.perlbench\_s: basepeak = yes

```
602.gcc_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -z muldefs -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

625.x264\_s: basepeak = yes

657.xz\_s: Same as 605.mcf\_s

C++ benchmarks:

```
620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

```
623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed®2017\_int\_base = 13.1

ThinkSystem SR645 V3  
(2.50 GHz,AMD EPYC 9224)

SPECspeed®2017\_int\_peak = 13.3

CPU2017 License: 9017

Test Date: Jan-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

623.xalancbmk\_s (continued):

```
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp  
-fltto -finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang
```

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

## Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-Q.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-Q.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2023-01-22 23:18:18-0500.

Report generated on 2023-02-15 10:39:25 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-14.