



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

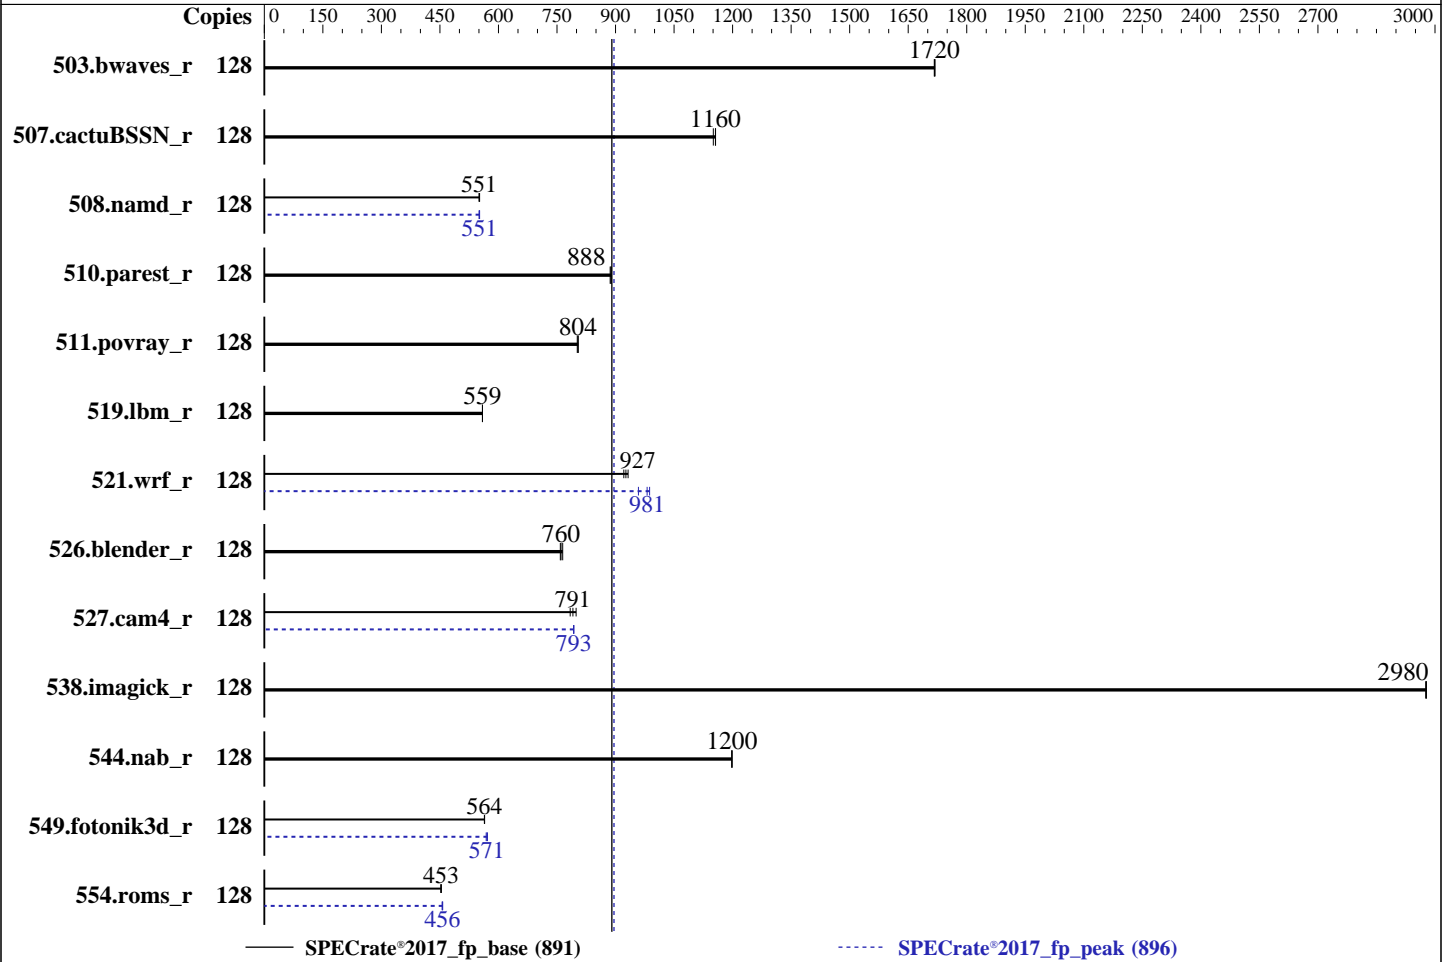

Hardware

CPU Name: AMD EPYC 9354
 Max MHz: 3800
 Nominal: 3250
 Enabled: 64 cores, 2 chips, 2 threads/core
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 32 MB shared / 4 cores
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: Ubuntu 22.04.1 LTS
 Kernel 5.15.0-43-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Lenovo BIOS Version KAE105L 1.20 released Dec-2022
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	748	1720	748	1720	747	1720	128	748	1720	748	1720	747	1720
507.cactuBSSN_r	128	141	1150	140	1160	140	1160	128	141	1150	140	1160	140	1160
508.namd_r	128	221	550	220	552	221	551	128	221	550	220	552	221	551
510.parest_r	128	377	889	377	888	378	886	128	377	889	377	888	378	886
511.povray_r	128	372	804	373	802	372	804	128	372	804	373	802	372	804
519.lbm_r	128	241	559	241	559	241	559	128	241	559	241	559	241	559
521.wrf_r	128	309	927	311	921	308	932	128	290	987	299	959	292	981
526.blender_r	128	257	759	256	760	255	765	128	257	759	256	760	255	765
527.cam4_r	128	283	791	286	784	280	799	128	282	793	282	793	282	793
538.imagick_r	128	107	2980	107	2980	107	2980	128	107	2980	107	2980	107	2980
544.nab_r	128	180	1200	180	1200	180	1200	128	180	1200	180	1200	180	1200
549.fotonik3d_r	128	884	565	885	564	884	564	128	872	572	877	569	874	571
554.roms_r	128	448	454	449	453	449	453	128	446	456	445	457	446	456

SPECrate®2017_fp_base = **891**

SPECrate®2017_fp_peak = **896**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Operating System Notes (Continued)

To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations, 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
"/home/cpu2017-1.1.9-amd-aocc400-genoa-B1c/amd_rate_aocc400_genoa_B_lib/
lib:/home/cpu2017-1.1.9-amd-aocc400-genoa-B1c/amd_rate_aocc400_genoa_B_l
ib/lib32:"
MALLOC_CONF = "retain:true"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:
Operating Mode set to Maximum Performance and then set it to Custom Mode
NUMA Nodes per Socket set to NPS4

Sysinfo program /home/cpu2017-1.1.9-amd-aocc400-genoa-B1c/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on perf Mon Jun 27 23:24:12 2022

SUT (System Under Test) info as seen by some common utilities.

Table of contents

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Platform Notes (Continued)

-
1. `uname -a`
 2. `w`
 3. Username
 4. `ulimit -a`
 5. `sysinfo process ancestry`
 6. `/proc/cpuinfo`
 7. `lscpu`
 8. `numactl --hardware`
 9. `/proc/meminfo`
 10. `who -r`
 11. Systemd service manager version: `systemd 249 (249.11-0ubuntu3.4)`
 12. Services, from `systemctl list-unit-files`
 13. Linux kernel boot-time arguments, from `/proc/cmdline`
 14. `cpupower frequency-info`
 15. `sysctl`
 16. `/sys/kernel/mm/transparent_hugepage`
 17. `/sys/kernel/mm/transparent_hugepage/khugepaged`
 18. OS release
 19. Disk information
 20. `/sys/devices/virtual/dmi/id`
 21. `dmidecode`
 22. BIOS
-

```
1. uname -a
Linux perf 5.15.0-43-generic #46-Ubuntu SMP Tue Jul 12 10:30:17 UTC 2022 x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
23:24:13 up 4:55, 1 user, load average: 21.26, 88.25, 112.17
USER      TTY      FROM          LOGIN@      IDLE       JCPU      PCPU      WHAT
root     tty1    -              18:39      4:44m    1.21s    0.16s    /bin/bash ./amd_rate_aocc400_genoa_B1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2023
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Platform Notes (Continued)

```
locked memory(kbytes) 2097152
process                3094274
nofiles                1024
vmemory(kbytes)       unlimited
locks                  unlimited
rtprio                 0
```

5. sysinfo process ancestry

```
/sbin/init
/bin/login -p --
-bash
/bin/bash ./run_SR645V3_genoa_rxy.sh
/bin/bash ./Run026-compliant-amd-ratefp.sh
python3 ./run_amd_rate_aocc400_genoa_B1.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 fprate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower --runmode
rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.018/templogs/preenv.fprate.018.0.log --lognum 018.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc400-genoa-B1c
```

6. /proc/cpuinfo

```
model name      : AMD EPYC 9354 32-Core Processor
vendor_id       : AuthenticAMD
cpu family      : 25
model           : 17
stepping        : 1
microcode       : 0xa101111
bugs             : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores       : 32
siblings        : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0:  core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 1:  core ids 0-3,8-11,16-19,24-27,32-35,40-43,48-51,56-59
physical id 0:  apicids 0-7,16-23,32-39,48-55,64-71,80-87,96-103,112-119
physical id 1:  apicids 128-135,144-151,160-167,176-183,192-199,208-215,224-231,240-247
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 891

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2023
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Platform Notes (Continued)

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:   0-127
Vendor ID:             AuthenticAMD
Model name:            AMD EPYC 9354 32-Core Processor
CPU family:            25
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   32
Socket(s):             2
Stepping:              1
Frequency boost:       enabled
CPU max MHz:           3800.0000
CPU min MHz:           400.0000
BogoMIPS:              6490.30

```

Flags:

```

fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d

```

```

Virtualization:        AMD-V
L1d cache:             2 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              64 MiB (64 instances)
L3 cache:              512 MiB (16 instances)
NUMA node(s):         8
NUMA node0 CPU(s):    0-7,64-71
NUMA node1 CPU(s):    8-15,72-79
NUMA node2 CPU(s):    16-23,80-87
NUMA node3 CPU(s):    24-31,88-95
NUMA node4 CPU(s):    32-39,96-103
NUMA node5 CPU(s):    40-47,104-111

```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate®2017_fp_base = 891

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017

Test Date: Feb-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Feb-2023

Tested by: Lenovo Global Technology

Software Availability: Nov-2022

Platform Notes (Continued)

NUMA node6 CPU(s): 48-55,112-119
 NUMA node7 CPU(s): 56-63,120-127
 Vulnerability Itlb multihit: Not affected
 Vulnerability L1tf: Not affected
 Vulnerability Mds: Not affected
 Vulnerability Meltdown: Not affected
 Vulnerability Mmio stale data: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	512M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
 node 0 cpus: 0-7,64-71
 node 0 size: 96505 MB
 node 0 free: 95420 MB
 node 1 cpus: 8-15,72-79
 node 1 size: 96719 MB
 node 1 free: 95706 MB
 node 2 cpus: 16-23,80-87
 node 2 size: 96752 MB
 node 2 free: 95692 MB
 node 3 cpus: 24-31,88-95
 node 3 size: 96752 MB
 node 3 free: 95645 MB
 node 4 cpus: 32-39,96-103
 node 4 size: 96752 MB
 node 4 free: 95772 MB
 node 5 cpus: 40-47,104-111
 node 5 size: 96752 MB
 node 5 free: 95644 MB
 node 6 cpus: 48-55,112-119
 node 6 size: 96752 MB
 node 6 free: 95775 MB
 node 7 cpus: 56-63,120-127

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```
node 7 size: 96689 MB
node 7 free: 95705 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10 12 12 12 32 32 32 32
  1:  12 10 12 12 32 32 32 32
  2:  12 12 10 12 32 32 32 32
  3:  12 12 12 10 32 32 32 32
  4:  32 32 32 32 10 12 12 12
  5:  32 32 32 32 12 10 12 12
  6:  32 32 32 32 12 12 10 12
  7:  32 32 32 32 12 12 12 10
```

```
-----
9. /proc/meminfo
   MemTotal:          792246620 kB
```

```
-----
10. who -r
    run-level 5 Jun 27 18:29
```

```
-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
    Default Target   Status
    graphical        running
```

```
-----
12. Services, from systemctl list-unit-files
    STATE          UNIT FILES
    enabled        ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
                    cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                    grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent
                    multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db
                    setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
                    systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
                    unattended-upgrades vgauth
    enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
    disabled       console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@
                    systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                    systemd-time-wait-sync upower
    generated      apport openipmi
    indirect       uuidd
    masked         cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                    x11-common
```

```
-----
13. Linux kernel boot-time arguments, from /proc/cmdline
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Platform Notes (Continued)

```
BOOT_IMAGE=/boot/vmlinuz-5.15.0-43-generic
root=UUID=7616761d-0c8a-469d-9659-4d1de0180e8a
ro
```

14. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 400 MHz and 3.80 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

Boost States: 0

Total States: 3

Pstate-P0: 3250MHz

15. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

16. /sys/kernel/mm/transparent_hugepage

defrag [always] defer defer+madvise madvise never

enabled [always] madvise never

hpage_pmd_size 2097152

shmem_enabled always within_size advise [never] deny force

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Feb-2023
Hardware Availability: Feb-2023
Software Availability: Nov-2022

Platform Notes (Continued)

```

17. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs    60000
    defrag                    1
    max_ptes_none            511
    max_ptes_shared          256
    max_ptes_swap            64
    pages_to_scan            4096
    scan_sleep_millisecs     10000

```

```

-----
18. OS release
    From /etc/*-release /etc/*-version
    os-release Ubuntu 22.04.1 LTS

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400-genoa-B1c
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda2       ext4  878G   61G  773G   8% /

```

```

-----
20. /sys/devices/virtual/dmi/id
  Vendor:          Lenovo
  Product:         ThinkSystem SR645 V3 MB,Genoa,DDR5,Oahu,1U
  Product Family: ThinkSystem
  Serial:          1234567890

```

```

-----
21. dmidecode
Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  7x SK Hynix HMC88AEBRA115N 32 GB 2 rank 4800
 17x SK Hynix HMC88AEBRA168N 32 GB 2 rank 4800

```

```

-----
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
  BIOS Vendor:      Lenovo
  BIOS Version:     KAE105L-1.20
  BIOS Date:        12/29/2022
  BIOS Revision:    1.20
  Firmware Revision: 1.20

```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Compiler Version Notes

```
=====
C | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
  | 544.nab_r(base, peak)
=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====
```

```
=====
C++ | 508.namd_r(base, peak) 510.parest_r(base, peak)
=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====
```

```
=====
C++, C | 511.povray_r(base, peak) 526.blender_r(base, peak)
=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
=====
```

```
=====
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
=====
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
=====
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

```
=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)
-----
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

```
=====
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
-----
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
  LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -lamdlibm -lamdalloc -lflang

C++ benchmarks:

-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -loop-unswitch-threshold=200000

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both Fortran and C:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -Kieee -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```

Benchmarks using both C and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-zopt -mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -Kieee -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang
```



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

```
508.namd_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-inline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc
```

510.parest_r: basepeak = yes

Fortran benchmarks:

503.bwaves_r: basepeak = yes

```
549.fotonik3d_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -lflang
```

```
554.roms_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

521.wrf_r (continued):

```
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang
```

527.cam4_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

```
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -reduce-array-computations=3 -zopt
-Kieee -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both C and C++:

511.povray_r: basepeak = yes

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

Peak Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR645 V3
(3.25 GHz,AMD EPYC 9354)

SPECrate®2017_fp_base = 891

SPECrate®2017_fp_peak = 896

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Feb-2023

Hardware Availability: Feb-2023

Software Availability: Nov-2022

Peak Other Flags (Continued)

Benchmarks using both C and C++:

-Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-Q.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Genoa-Q.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2022-06-27 19:24:12-0400.

Report generated on 2023-03-02 11:25:50 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-28.