



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

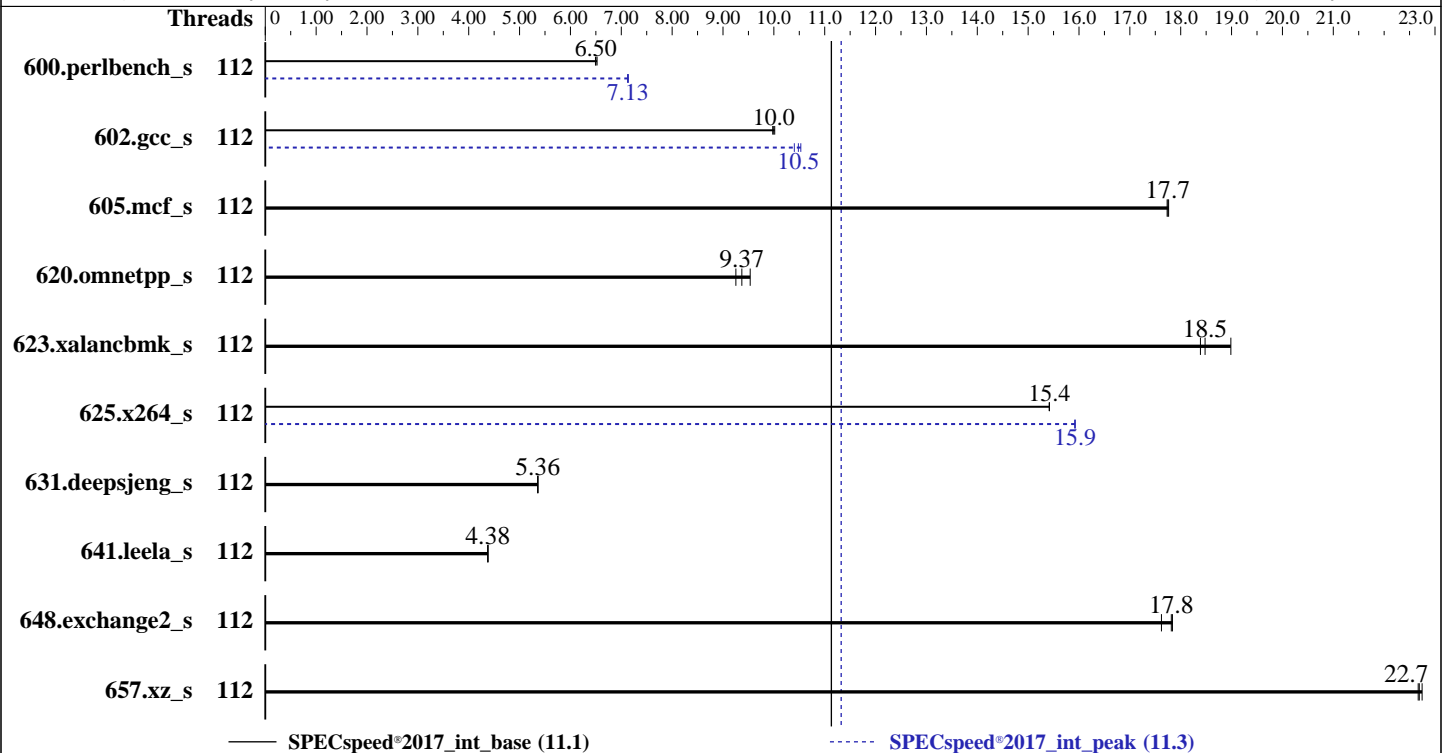

### Hardware

CPU Name: Intel Xeon Gold 6330  
 Max MHz: 3100  
 Nominal: 2000  
 Enabled: 56 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 Chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 42 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R, running at 2933)  
 Storage: 1 x 512 GB NVMe SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.5 (Ootpa)  
 Kernel 4.18.0-348.el8.x86\_64  
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: Version PEGC0042 released Jan-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero TDI100C3R-212**  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Mar-2023

**Hardware Availability:** Apr-2021

**Software Availability:** May-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	112	272	6.52	<b><u>273</u></b>	<b><u>6.50</u></b>	273	6.49	112	249	7.12	249	7.14	<b><u>249</u></b>	<b><u>7.13</u></b>
602.gcc_s	112	398	10.0	399	9.98	<b><u>398</u></b>	<b><u>10.0</u></b>	112	378	10.5	<b><u>380</u></b>	<b><u>10.5</u></b>	383	10.4
605.mcf_s	112	266	17.8	<b><u>266</u></b>	<b><u>17.7</u></b>	266	17.7	112	266	17.8	<b><u>266</u></b>	<b><u>17.7</u></b>	266	17.7
620.omnetpp_s	112	171	9.53	<b><u>174</u></b>	<b><u>9.37</u></b>	176	9.25	112	171	9.53	<b><u>174</u></b>	<b><u>9.37</u></b>	176	9.25
623.xalancbmk_s	112	74.6	19.0	77.1	18.4	<b><u>76.7</u></b>	<b><u>18.5</u></b>	112	74.6	19.0	77.1	18.4	<b><u>76.7</u></b>	<b><u>18.5</u></b>
625.x264_s	112	<b><u>114</u></b>	<b><u>15.4</u></b>	114	15.4	114	15.4	112	111	15.9	111	15.9	<b><u>111</u></b>	<b><u>15.9</u></b>
631.deepsjeng_s	112	267	5.36	<b><u>267</u></b>	<b><u>5.36</u></b>	267	5.36	112	267	5.36	<b><u>267</u></b>	<b><u>5.36</u></b>	267	5.36
641.leela_s	112	<b><u>390</u></b>	<b><u>4.38</u></b>	390	4.37	390	4.38	112	<b><u>390</u></b>	<b><u>4.38</u></b>	390	4.37	390	4.38
648.exchange2_s	112	165	17.8	<b><u>165</u></b>	<b><u>17.8</u></b>	167	17.6	112	165	17.8	<b><u>165</u></b>	<b><u>17.8</u></b>	167	17.6
657.xz_s	112	272	22.7	273	22.7	<b><u>272</u></b>	<b><u>22.7</u></b>	112	272	22.7	273	22.7	<b><u>272</u></b>	<b><u>22.7</u></b>

SPECspeed®2017\_int\_base = **11.1**

SPECspeed®2017\_int\_peak = **11.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero TDI100C3R-212**  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Mar-2023

**Hardware Availability:** Apr-2021

**Software Availability:** May-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
sync; echo 1 > /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance

KTI Prefetch = Enable

LLC Dead Line Alloc = Disable

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on Tyronespec Wed Mar 22 04:58:17 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 239 (239-51.e18)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
  21. Disk information
  22. /sys/devices/virtual/dmi/id
  23. dmidecode
  24. BIOS
- 

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero TDI100C3R-212**  
(2.00 GHz, Intel Xeon Gold 6330)

**SPECspeed®2017\_int\_base = 11.1**  
**SPECspeed®2017\_int\_peak = 11.3**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Mar-2023  
**Hardware Availability:** Apr-2021  
**Software Availability:** May-2022

## Platform Notes (Continued)

```

-----
1. uname -a
Linux Tyronespec 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021 x86_64 x86_64 x86_64 GNU/Linux
-----
2. w
04:58:17 up 23:35,  2 users,  load average: 0.00, 0.00, 0.00
USER      TTY      FROM            LOGIN@   IDLE   JCPU   PCPU   WHAT
root      tty1     -                Tue05    8.00s  1.25s  0.00s  -bash
root      tty2     -                Tue05    22:23m 0.02s  0.02s  -bash
-----
3. Username
From environment variable $USER:  root
-----
4. ulimit -a
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4126640
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126640
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags -c
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=56 --tune base,peak -o all --define
intspeedaffinity --define smt-on --define drop_caches intspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=56 --tune base,peak --output_format all
--define intspeedaffinity --define smt-on --define drop_caches --nopower --runmode speed --tune base:peak
--size refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.003/templogs/preenv.intspeed.003.0.log --lognum 003.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz
vendor_id      : GenuineIntel
cpu family     : 6
model          : 106
stepping       : 6
microcode      : 0xd0002e0

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero TDI100C3R-212**  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Mar-2023

**Hardware Availability:** Apr-2021

**Software Availability:** May-2022

## Platform Notes (Continued)

```

bugs           : spectre_v1 spectre_v2 spec_store_bypass swappg
cpu cores     : 28
siblings      : 56
2 physical ids (chips)
112 processors (hardware threads)
physical id 0: core ids 0-27
physical id 1: core ids 0-27
physical id 0: apicids 0-55
physical id 1: apicids 128-183

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.32.1:

```

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 112
On-line CPU(s) list: 0-111
Thread(s) per core: 2
Core(s) per socket: 28
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz
BIOS Model name: Intel(R) Xeon(R) Gold 6330 CPU @ 2.00GHz
Stepping: 6
CPU MHz: 2000.000
CPU max MHz: 3100.0000
CPU min MHz: 800.0000
BogoMIPS: 4000.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 43008K
NUMA node0 CPU(s): 0-27,56-83
NUMA node1 CPU(s): 28-55,84-111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca
sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single intel_ppin ssbd mba ibrs ibpb
stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust
sgx bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect
wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi
umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpoperndq la57 rdpid sgx_lc fsrm md_clear pconfig flush_l1d arch_capabilities

```

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero TDI100C3R-212**  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Mar-2023

**Hardware Availability:** Apr-2021

**Software Availability:** May-2022

## Platform Notes (Continued)

```

available: 2 nodes (0-1)
node 0 cpus: 0-27,56-83
node 0 size: 515637 MB
node 0 free: 481605 MB
node 1 cpus: 28-55,84-111
node 1 size: 516081 MB
node 1 free: 483816 MB
node distances:
node  0  1
  0:  10  20
  1:  20  10

```

```

-----
9. /proc/meminfo
MemTotal:      1056480196 kB

```

```

-----
10. who -r
run-level 3 Mar 21 05:23

```

```

-----
11. Systemd service manager version: systemd 239 (239-51.el8)
Default Target Status
multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon
atd auditd autovt@ avahi-daemon bluetooth chronyd crond cups display-manager firewalld gdm
getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump ksm ksmtuned
libstoragemgmt libvirt loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd
nis-domainname nvidia-hibernate nvidia-resume nvidia-suspend nvme-fc-boot-connections
ostree-remount qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark
sep5 smartd sshd sssd syslog timedatex tuned udisks2 vdo vgaauthd vmtoolsd
disabled arp-ethers blk-availability brlty canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait console-getty cpupower cups-browsed debug-shell
dnsmasq ebttables gssproxy httpd httpd@ initial-setup initial-setup-reconfiguration iprump
iprinit iprupdate iscsid iscsiui kpatch kvm_stat ledmon man-db-restart-cache-update
ndctl-monitor netcf-transaction nfs-blkmap nfs-convert nfs-server nftables numad nvidia-powerd
nvme-fc-autoconnect oddjobd podman podman-auto-update podman-restart psacct radvd ras-mc-ctl
rasdaemon rdisc rhcd rhsm rhsm-facts saslauthd serial-getty@ snmpd snmptrapd speech-dispatcher
sshd-keygen@ switcheroo-control systemd-nsd systemd-resolved tcsh tog-pegasus upower
virtinterfaced virtnetworkd virtnodevdev virtnwfilterd virtproxyd virtqemu virtsecret
virtstoraged wpa_supplicant
generated SystemTap compile-server gcc-toolset-10-stap-server gcc-toolset-10-systemtap
gcc-toolset-11-stap-server gcc-toolset-11-systemtap gcc-toolset-9-stap-server
gcc-toolset-9-systemtap scripts startup
indirect spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo virtlockd
virtlogd
masked systemd-timedated

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd1,gpt2)/vmlinuz-4.18.0-348.el8.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero TDI100C3R-212**  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Mar-2023

**Hardware Availability:** Apr-2021

**Software Availability:** May-2022

## Platform Notes (Continued)

rhgb  
quiet

### 14. cpupower frequency-info

analyzing CPU 0:

current policy: frequency should be within 800 MHz and 3.10 GHz.

The governor "performance" may decide which speed to use within this range.

boost state support:

Supported: yes

Active: yes

### 15. tuned-adm active

Current active profile: throughput-performance

### 16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	0
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0
vm.nr_overcommit_hugepages	0
vm.swappiness	10
vm.watermark_boost_factor	15000
vm.watermark_scale_factor	10
vm.zone_reclaim_mode	0

### 17. /sys/kernel/mm/transparent\_hugepage

defrag	always defer defer+madvise [madvise] never
enabled	[always] madvise never
hpage_pmd_size	2097152
shmem_enabled	always within_size advise [never] deny force

### 18. /sys/kernel/mm/transparent\_hugepage/khugepaged

alloc_sleep_millisecs	60000
defrag	1
max_ptes_none	511
max_ptes_swap	64
pages_to_scan	4096
scan_sleep_millisecs	10000

### 19. OS release

From /etc/*-release /etc/*-version	
os-release	Red Hat Enterprise Linux 8.5 (Ootpa)
redhat-release	Red Hat Enterprise Linux release 8.5 (Ootpa)

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero TDI100C3R-212  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Mar-2023

Hardware Availability: Apr-2021

Software Availability: May-2022

## Platform Notes (Continued)

system-release Red Hat Enterprise Linux release 8.5 (Ootpa)

### 20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities

```

itlb_multihit      Not affected
l1tf               Not affected
mds               Not affected
meltdown          Not affected
spec_store_bypass Mitigation: Speculative Store Bypass disabled via prctl and seccomp
spectre_v1         Mitigation: usercopy/swaps barriers and __user pointer sanitization
spectre_v2         Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
srbds             Not affected
tsx_async_abort   Not affected

```

For more information, see the Linux documentation on hardware vulnerabilities, for example <https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

### 21. Disk information

SPEC is set to: /home/cpu2017

```

Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs      402G  228G  174G   57% /home

```

### 22. /sys/devices/virtual/dmi/id

```

Vendor:      TyroneSystems
Product:     TDI100C3R-212
Product Family: Family
Serial:      2X20022302

```

### 23. dmidecode

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Micron 36ASF8G72PZ-3G2F1 64 GB 2 rank 3200, configured at 2933

### 24. BIOS

(This section combines info from /sys/devices and dmidecode.)

```

BIOS Vendor:      American Megatrends International, LLC.
BIOS Version:     PEGC0042
BIOS Date:        01/16/2023
BIOS Revision:    5.22

```

## Compiler Version Notes

```

C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
      | 657.xz_s(base, peak)

```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

```

C++    | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)

```

(Continued on next page)





# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero TDI100C3R-212**  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Mar-2023

**Hardware Availability:** Apr-2021

**Software Availability:** May-2022

## Compiler Version Notes (Continued)

| 641.leela\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 648.exchange2\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

600.perlbench\_s: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
602.gcc\_s: -DSPEC\_LP64  
605.mcf\_s: -DSPEC\_LP64  
620.omnetpp\_s: -DSPEC\_LP64  
623.xalancbmk\_s: -DSPEC\_LP64 -DSPEC\_LINUX  
625.x264\_s: -DSPEC\_LP64  
631.deepsjeng\_s: -DSPEC\_LP64  
641.leela\_s: -DSPEC\_LP64  
648.exchange2\_s: -DSPEC\_LP64  
657.xz\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flt0  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero TDI100C3R-212**  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Mar-2023

**Hardware Availability:** Apr-2021

**Software Availability:** May-2022

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-fno-strict-overflow -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

```
602.gcc_s: -m64 -std=c11 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -O3
-ffast-math -flto -mfpmath=sse -funroll-loops
```

(Continued on next page)



# SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero TDI100C3R-212**  
(2.00 GHz, Intel Xeon Gold 6330)

SPECspeed®2017\_int\_base = 11.1

SPECspeed®2017\_int\_peak = 11.3

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Mar-2023

**Hardware Availability:** Apr-2021

**Software Availability:** May-2022

## Peak Optimization Flags (Continued)

602.gcc\_s (continued):

```
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

605.mcf\_s: basepeak = yes

```
625.x264_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -O3  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP  
-fno-alias -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

657.xz\_s: basepeak = yes

C++ benchmarks:

620.omnetpp\_s: basepeak = yes

623.xalancbmk\_s: basepeak = yes

631.deepsjeng\_s: basepeak = yes

641.leela\_s: basepeak = yes

Fortran benchmarks:

648.exchange2\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-ICX-revA.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-22 00:58:16-0400.

Report generated on 2024-01-29 17:30:06 by CPU2017 PDF formatter v6716.

Originally published on 2023-04-11.