



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11


(2.10 GHz, Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 842

SPECrate®2017_int_peak = 870

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Jun-2022

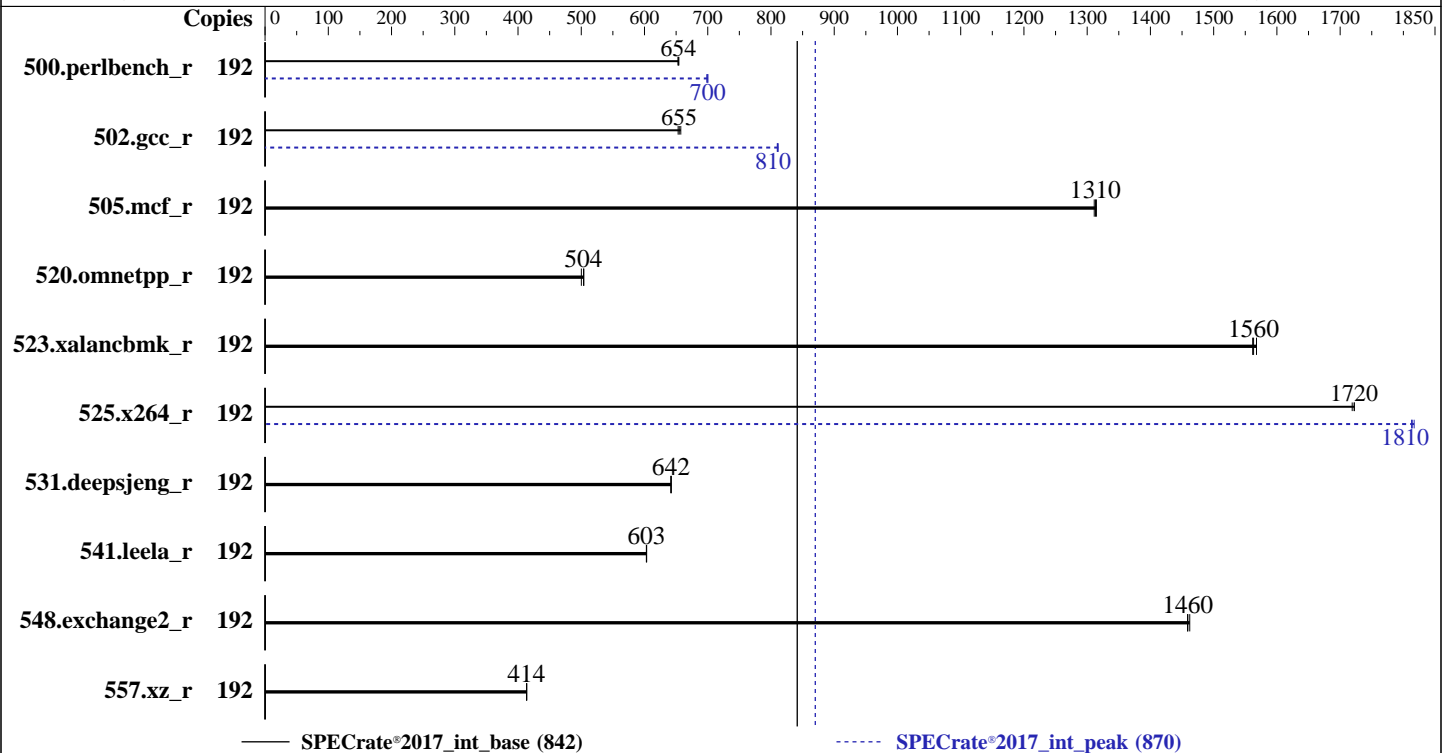

Hardware

CPU Name: Intel Xeon Platinum 8468
 Max MHz: 3800
 Nominal: 2100
 Enabled: 96 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4
 5.14.21-150400.22-default
 Compiler: C/C++: Version 2022.1 of Intel oneAPI DPC++/C++
 Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler
 for Linux;
 Parallel: No
 Firmware: HPE BIOS Version v1.22 01/18/2023 released
 Jan-2023
 File System: btrfs
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at
 the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 842

SPECrate®2017_int_peak = 870

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Jun-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	468	654	467	654	468	653	192	437	700	437	700	438	698
502.gcc_r	192	414	657	415	655	416	653	192	335	810	336	810	335	811
505.mcf_r	192	237	1310	236	1310	236	1310	192	237	1310	236	1310	236	1310
520.omnetpp_r	192	504	500	500	504	500	504	192	504	500	500	504	500	504
523.xalancbmk_r	192	130	1560	130	1560	129	1570	192	130	1560	130	1560	129	1570
525.x264_r	192	196	1720	195	1720	195	1720	192	185	1810	185	1810	185	1820
531.deepsjeng_r	192	343	642	343	642	343	642	192	343	642	343	642	343	642
541.leela_r	192	527	603	527	603	527	603	192	527	603	527	603	527	603
548.exchange2_r	192	344	1460	345	1460	345	1460	192	344	1460	345	1460	345	1460
557.xz_r	192	502	413	501	414	501	414	192	502	413	501	414	501	414

SPECrate®2017_int_base = 842

SPECrate®2017_int_peak = 870

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
IRQ balance service was stopped using "systemctl stop irqbalance.service"
tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 842

SPECrate®2017_int_peak = 870

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Jun-2022

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"
MALLOC_CONF = "retain:true"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000161 for the Intel Xeon Platinum 8468 processor.

BIOS Configuration

Workload Profile set to General Throughput Compute
Memory Patrol Scrubbing set to Disabled
Last Level Cache (LLC) Dead Line Allocation set to Disabled
Intel UPI Link Enablement set to Single Link
Enhanced Processor Performance Profile set to Aggressive
Thermal Configuration set to Maximum Cooling
Workload Profile set to Custom
Adjacent Sector Prefetch set to Disabled
DCU Stream Prefetcher set to Disabled
Intel UPI Link Power Management set to Enabled
Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Feb 17 02:59:52 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 842

SPECrate®2017_int_peak = 870

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Jun-2022

Platform Notes (Continued)

```
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
```

```
-----
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
-----
2. w
02:59:52 up 15 min, 0 users, load average: 0.07, 0.09, 0.15
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU   WHAT
```

```
-----
3. Username
From environment variable $USER: root
```

```
-----
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 4126999
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 4126999
virtual memory          (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/intrate.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 842

SPECrate®2017_int_peak = 870

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Jun-2022

Platform Notes (Continued)

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8468
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 8
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 48
siblings       : 96
2 physical ids (chips)
192 processors (hardware threads)
physical id 0: core ids 0-47
physical id 1: core ids 0-47
physical id 0: apicids 0-95
physical id 1: apicids 128-223
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

-----
7. lscpu

From lscpu from util-linux 2.37.2:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 192
On-line CPU(s) list:   0-191
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Platinum 8468
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    48
Socket(s):              2
Stepping:               8
BogoMIPS:               4200.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                        vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep
                        bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                        vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                        bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                        tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:         VT-x
L1d cache:              4.5 MiB (96 instances)
L1i cache:              3 MiB (96 instances)

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 842

SPECrate®2017_int_peak = 870

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Jun-2022

Platform Notes (Continued)

```

L2 cache:                192 MiB (96 instances)
L3 cache:                210 MiB (2 instances)
NUMA node(s):           8
NUMA node0 CPU(s):      0-11,96-107
NUMA node1 CPU(s):      12-23,108-119
NUMA node2 CPU(s):      24-35,120-131
NUMA node3 CPU(s):      36-47,132-143
NUMA node4 CPU(s):      48-59,144-155
NUMA node5 CPU(s):      60-71,156-167
NUMA node6 CPU(s):      72-83,168-179
NUMA node7 CPU(s):      84-95,180-191
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:      Not affected
Vulnerability Mds:       Not affected
Vulnerability Meltdown:  Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:     Not affected
Vulnerability Tsx async abort: Not affected

```

From `lscpu --cache:`

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.5M	12	Data	1	64	1	64
L1i	32K	3M	8	Instruction	1	64	1	64
L2	2M	192M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. `numactl --hardware`

NOTE: a `numactl 'node'` might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-11,96-107
node 0 size: 128730 MB
node 0 free: 126917 MB
node 1 cpus: 12-23,108-119
node 1 size: 128983 MB
node 1 free: 128464 MB
node 2 cpus: 24-35,120-131
node 2 size: 129017 MB
node 2 free: 128691 MB
node 3 cpus: 36-47,132-143
node 3 size: 129017 MB
node 3 free: 128714 MB
node 4 cpus: 48-59,144-155
node 4 size: 129017 MB
node 4 free: 128314 MB
node 5 cpus: 60-71,156-167
node 5 size: 129017 MB
node 5 free: 128475 MB
node 6 cpus: 72-83,168-179
node 6 size: 129017 MB
node 6 free: 128722 MB
node 7 cpus: 84-95,180-191
node 7 size: 128970 MB
node 7 free: 128666 MB
node distances:
node  0  1  2  3  4  5  6  7
  0:  10 20 30 30 30 30 30 30
  1:  20 10 30 30 30 30 30 30

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 842

SPECrate®2017_int_peak = 870

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Jun-2022

Platform Notes (Continued)

2:	30	30	10	20	30	30	30	30
3:	30	30	20	10	30	30	30	30
4:	30	30	30	30	10	20	30	30
5:	30	30	30	30	20	10	30	30
6:	30	30	30	30	30	30	10	20
7:	30	30	30	30	30	30	20	10

```
9. /proc/meminfo
   MemTotal:      1056537076 kB
```

```
10. who -r
     run-level 5 Feb 17 02:45
```

```
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
     Default Target  Status
     graphical      running
```

```
12. Services, from systemctl list-unit-files
     STATE          UNIT FILES
     enabled        ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron
                    display-manager firewalld getty@ haveged irqbalance iscsi issue-generator kbdsettings klog
                    lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4
                    wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant
     enabled-runtime systemd-remount-fs
     disabled       NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon
                    appstream-sync-cache autofs autoyast-initscripts blk-availability bluetooth-mesh
                    boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed
                    debug-shell dnsmasq ebttables exchange-bmc-os-info gpm grub2-once haveged-switch-root ipmi
                    ipmievdev iscsi-init iscsid iscsiio issue-add-ssh-keys kexec-load lunmask man-db-create
                    multipathd nfs nfs-blkmap nm-cloud-setup nmb openvpn@ ostree-remount pppoe pppoe-server
                    rdisc rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb
                    snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures
                    systemd-network-generator systemd-sysexec systemd-time-wait-sync systemd-timesyncd udisks2
                    upower wpa_supplicant@
     indirect       pcsd saned@ wickedd
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
     BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
     root=UUID=8fe32e86-615c-460b-ab75-95f5e406870a
     splash=silent
     mitigations=auto
     quiet
     security=apparmor
```

```
14. cpupower frequency-info
     analyzing CPU 0:
     Unable to determine current policy
     boost state support:
     Supported: yes
     Active: yes
```

```
15. sysctl
     kernel.numa_balancing      1
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 842

SPECrate®2017_int_peak = 870

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Feb-2023
Hardware Availability: Jan-2023
Software Availability: Jun-2022

Platform Notes (Continued)

```

kernel.randomize_va_space      2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                  20
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                    60
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
SPEC is set to: /home/cpu2017
Filesystem  Type  Size  Used Avail Use% Mounted on
/dev/sda3   btrfs 891G  144G  747G  17% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:      HPE
Product:     ProLiant DL360 Gen11
Product Family: ProLiant
Serial:      CNX20800PW

```

```

-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 842

SPECrate®2017_int_peak = 870

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Platform Notes (Continued)

Memory:

16x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

22. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.22
BIOS Date: 01/18/2023
BIOS Revision: 1.22
Firmware Revision: 1.10

Compiler Version Notes

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 842

SPECrate®2017_int_peak = 870

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 842

SPECrate®2017_int_peak = 870

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

Peak Optimization Flags

C benchmarks:

```

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-strict-overflow
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmallocc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Platinum 8468)

SPECrate®2017_int_base = 842

SPECrate®2017_int_peak = 870

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Jun-2022

Peak Optimization Flags (Continued)

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-16 16:29:52-0500.

Report generated on 2024-01-29 17:30:26 by CPU2017 PDF formatter v6716.

Originally published on 2023-04-11.