



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Hewlett Packard Enterprise

(Test Sponsor: HPE)

### ProLiant DL380a Gen11


(2.70 GHz, Intel Xeon Platinum 8458P)

SPECrate®2017\_int\_base = 819

SPECrate®2017\_int\_peak = 847

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: May-2023  
Hardware Availability: Mar-2023  
Software Availability: Dec-2022

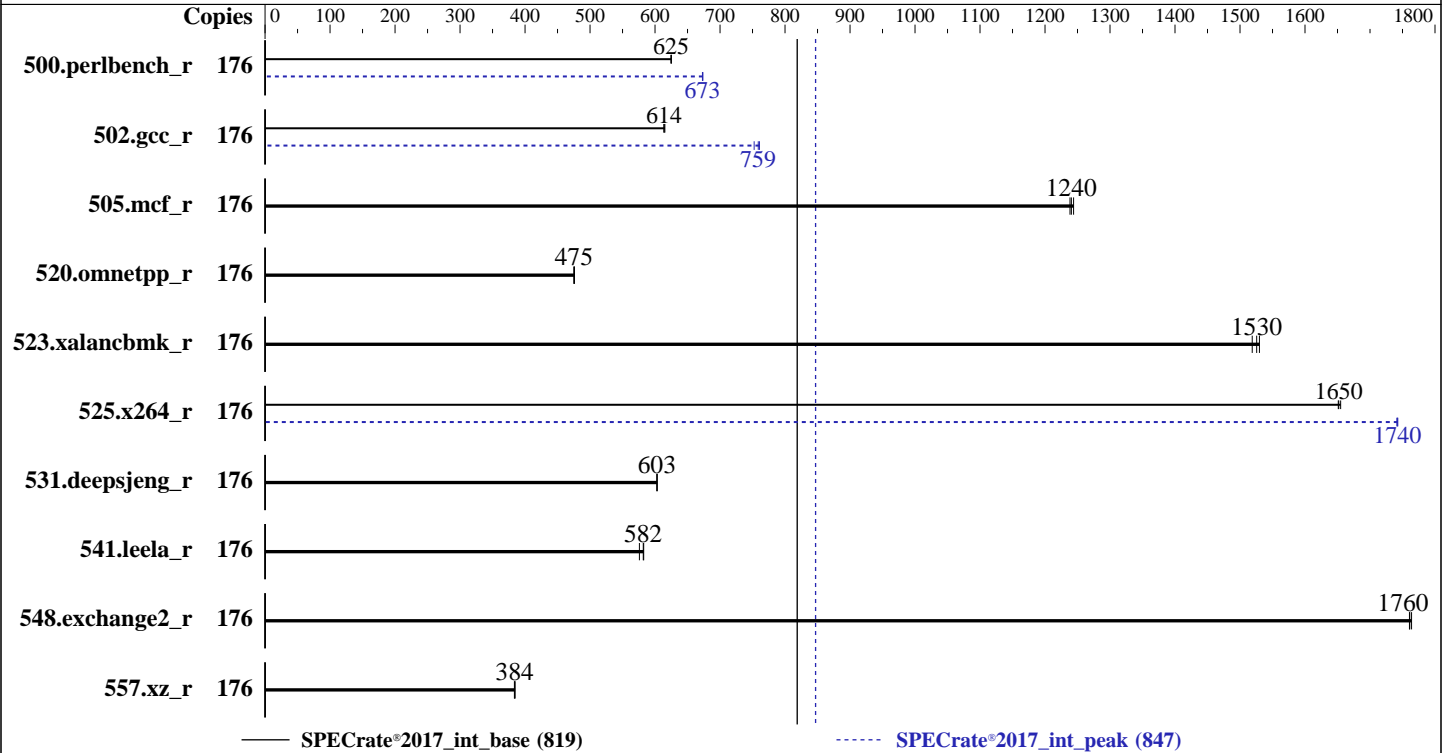

### Hardware

CPU Name: Intel Xeon Platinum 8458P  
 Max MHz: 3800  
 Nominal: 2700  
 Enabled: 88 cores, 2 chips, 2 threads/core  
 Orderable: 1, 2 chip(s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 82.5 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 1.6 TB NVMe SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 Kernel 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: HPE BIOS Version v1.22 01/18/2023 released Jan-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Platinum 8458P)

SPECrate®2017\_int\_base = 819

SPECrate®2017\_int\_peak = 847

CPU2017 License: 3  
Test Sponsor: HPE  
Tested by: HPE

Test Date: May-2023  
Hardware Availability: Mar-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	176	<b>448</b>	<b>625</b>	449	625	448	625	176	416	673	<b>416</b>	<b>673</b>	416	674
502.gcc_r	176	405	615	<b>406</b>	<b>614</b>	406	614	176	328	761	<b>328</b>	<b>759</b>	331	752
505.mcf_r	176	<b>229</b>	<b>1240</b>	229	1240	230	1240	176	<b>229</b>	<b>1240</b>	229	1240	230	1240
520.omnetpp_r	176	<b>486</b>	<b>475</b>	486	475	485	476	176	<b>486</b>	<b>475</b>	486	475	485	476
523.xalancbmk_r	176	121	1530	122	1520	<b>122</b>	<b>1530</b>	176	121	1530	122	1520	<b>122</b>	<b>1530</b>
525.x264_r	176	<b>187</b>	<b>1650</b>	186	1650	187	1650	176	<b>177</b>	<b>1740</b>	177	1740	177	1740
531.deepsjeng_r	176	334	603	<b>334</b>	<b>603</b>	334	603	176	334	603	<b>334</b>	<b>603</b>	334	603
541.leela_r	176	506	576	<b>501</b>	<b>582</b>	500	583	176	506	576	<b>501</b>	<b>582</b>	500	583
548.exchange2_r	176	262	1760	<b>262</b>	<b>1760</b>	261	1760	176	262	1760	<b>262</b>	<b>1760</b>	261	1760
557.xz_r	176	494	385	<b>495</b>	<b>384</b>	495	384	176	494	385	<b>495</b>	<b>384</b>	495	384

SPECrate®2017\_int\_base = 819

SPECrate®2017\_int\_peak = 847

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
IRQ balance service was stopped using "systemctl stop irqbalance.service"  
tuned-adm profile was set to Accelerator-Performance using "tuned-adm profile accelerator-performance"  
perf-bias for all the CPUs is set using "cpupower set -b 0"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.70 GHz, Intel Xeon Platinum 8458P)

**SPECrate®2017\_int\_base = 819**

**SPECrate®2017\_int\_peak = 847**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000161 for the Intel Xeon Platinum 8458P Processor

BIOS Configuration

Workload Profile set to General Throughput Compute

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Intel UPI Link Enablement set to Single Link

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Adjacent Sector Prefetch set to Disabled

DCU Stream Prefetcher set to Disabled

Intel UPI Link Power Management set to Enabled

Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Wed May 10 16:20:30 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

**(2.70 GHz, Intel Xeon Platinum 8458P)**

**SPECrate®2017\_int\_base = 819**

**SPECrate®2017\_int\_peak = 847**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

```
2. w
16:20:30 up 9 min, 2 users, load average: 0.00, 0.32, 0.35
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 07Apr22 398days 0.00s 0.00s -bash
root pts/0 07Apr22 6.00s 0.89s 0.01s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 2062699
max locked memory (kbytes, -l) 64
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 2062699
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=176 -c
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=88 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=176 --configfile
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Platinum 8458P)

**SPECrate®2017\_int\_base = 819**

**SPECrate®2017\_int\_peak = 847**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=88 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.017/templogs/preenv.intrate.017.0.log --lognum 017.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8458P
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 6
microcode      : 0x2b000161
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores     : 44
siblings       : 88
2 physical ids (chips)
176 processors (hardware threads)
physical id 0: core ids 0-43
physical id 1: core ids 0-43
physical id 0: apicids 0-87
physical id 1: apicids 128-215
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         46 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                176
On-line CPU(s) list:  0-175
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
Model name:            Intel(R) Xeon(R) Platinum 8458P
BIOS Model name:      Intel(R) Xeon(R) Platinum 8458P
CPU family:            6
Model:                143
Thread(s) per core:   2
Core(s) per socket:   44
Socket(s):             2
Stepping:              6
BogoMIPS:              5400.00
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.70 GHz, Intel Xeon Platinum 8458P)

**SPECrate®2017\_int\_base = 819**

**SPECrate®2017\_int\_peak = 847**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

```
split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpcplmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_llid arch_capabilities
VT-x
```

### Virtualization:

L1d cache: 4.1 MiB (88 instances)  
L1i cache: 2.8 MiB (88 instances)  
L2 cache: 176 MiB (88 instances)  
L3 cache: 165 MiB (2 instances)

### NUMA node(s):

8  
NUMA node0 CPU(s): 0-10,88-98  
NUMA node1 CPU(s): 11-21,99-109  
NUMA node2 CPU(s): 22-32,110-120  
NUMA node3 CPU(s): 33-43,121-131  
NUMA node4 CPU(s): 44-54,132-142  
NUMA node5 CPU(s): 55-65,143-153  
NUMA node6 CPU(s): 66-76,154-164  
NUMA node7 CPU(s): 77-87,165-175

### Vulnerability Itlb multihit:

Not affected

### Vulnerability L1tf:

Not affected

### Vulnerability Mds:

Not affected

### Vulnerability Meltdown:

Not affected

### Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl

### Vulnerability Spectre v1:

Mitigation; usercopy/swaps barriers and \_\_user pointer sanitization

### Vulnerability Spectre v2:

Mitigation; Enhanced IBRS, IBPB conditional, RSB filling

### Vulnerability Srbds:

Not affected

### Vulnerability Tsx async abort:

Not affected

### From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.1M	12	Data	1	64	1	64
L1i	32K	2.8M	8	Instruction	1	64	1	64
L2	2M	176M	16	Unified	2	2048	1	64
L3	82.5M	165M	15	Unified	3	90112	1	64

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-10,88-98

node 0 size: 64220 MB

node 0 free: 63841 MB

node 1 cpus: 11-21,99-109

node 1 size: 64507 MB

node 1 free: 64168 MB

node 2 cpus: 22-32,110-120

node 2 size: 64507 MB

node 2 free: 64171 MB

node 3 cpus: 33-43,121-131

node 3 size: 64507 MB

node 3 free: 63948 MB

node 4 cpus: 44-54,132-142

node 4 size: 64507 MB

node 4 free: 64071 MB

node 5 cpus: 55-65,143-153

node 5 size: 64470 MB

node 5 free: 63726 MB

node 6 cpus: 66-76,154-164

node 6 size: 64507 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.70 GHz, Intel Xeon Platinum 8458P)

**SPECrate®2017\_int\_base = 819**

**SPECrate®2017\_int\_peak = 847**

**CPU2017 License:** 3  
**Test Sponsor:** HPE  
**Tested by:** HPE

**Test Date:** May-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

```

node 6 free: 64180 MB
node 7 cpus: 77-87,165-175
node 7 size: 64487 MB
node 7 free: 64145 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10  20  30  30  30  30  30  30
1:  20  10  30  30  30  30  30  30
2:  30  30  10  20  30  30  30  30
3:  30  30  20  10  30  30  30  30
4:  30  30  30  30  10  20  30  30
5:  30  30  30  30  20  10  30  30
6:  30  30  30  30  30  30  10  20
7:  30  30  30  30  30  30  20  10

```

```

-----
9. /proc/meminfo
   MemTotal:      528091868 kB

```

```

-----
10. who -r
    run-level 3 Apr 7 05:30

```

```

-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
    Default Target  Status
    multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond
           dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
           nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
           systemd-network-generator tuned udisks2
enabled-runtime  systemd-remount-fs
disabled         blk-availability chrony-wait console-getty cpupower debug-shell kvm_stat
                 man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmdb-rebuild
                 serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

```

-----
14. cpupower frequency-info
    analyzing CPU 0:
      Unable to determine current policy
      boost state support:
        Supported: yes
        Active: yes

```

```

-----
15. tuned-adm active

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.70 GHz, Intel Xeon Platinum 8458P)

**SPECrate®2017\_int\_base = 819**

**SPECrate®2017\_int\_peak = 847**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

Current active profile: accelerator-performance

### 16. sysctl

```

kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           0

```

### 17. /sys/kernel/mm/transparent\_hugepage

```

defrag          always defer defer+madvice [madvice] never
enabled         [always] madvice never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

```

### 18. /sys/kernel/mm/transparent\_hugepage/khugepaged

```

alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000

```

### 19. OS release

```

From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)

```

### 20. Disk information

SPEC is set to: /home/cpu2017

```

Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs   1.4T  151G  1.3T  11% /home

```

### 21. /sys/devices/virtual/dmi/id

```

Vendor:      HPE
Product:     ProLiant DL380a Gen11
Product Family: ProLiant
Serial:      CNX22602MZ

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.70 GHz, Intel Xeon Platinum 8458P)

**SPECrate®2017\_int\_base = 819**

**SPECrate®2017\_int\_peak = 847**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Platform Notes (Continued)

### 22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

7x Hynix HMC88AEBRA168N 32 GB 2 rank 4800  
6x Hynix HMC88MEBRA113N 32 GB 2 rank 4800  
3x Hynix HMC88MEBRA115N 32 GB 2 rank 4800

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.22  
BIOS Date: 01/18/2023  
BIOS Revision: 1.22  
Firmware Revision: 1.30

## Compiler Version Notes

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++ | 520.omnetpp\_r(base, peak) 523.xalancbnk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.70 GHz, Intel Xeon Platinum 8458P)

**SPECrate®2017\_int\_base = 819**

**SPECrate®2017\_int\_peak = 847**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

-----  
Fortran | 548.exchange2\_r(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsaphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin  
-lqkmallo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL380a Gen11**

(2.70 GHz, Intel Xeon Platinum 8458P)

**SPECrate®2017\_int\_base = 819**

**SPECrate®2017\_int\_peak = 847**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Platinum 8458P)

SPECrate®2017\_int\_base = 819

SPECrate®2017\_int\_peak = 847

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.70 GHz, Intel Xeon Platinum 8458P)

SPECrate®2017\_int\_base = 819

SPECrate®2017\_int\_peak = 847

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** May-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.2.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-10 06:50:30-0400.

Report generated on 2024-01-29 17:47:44 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-06.