



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

CPU2017 License: 3358


Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Feb-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Nov-2022

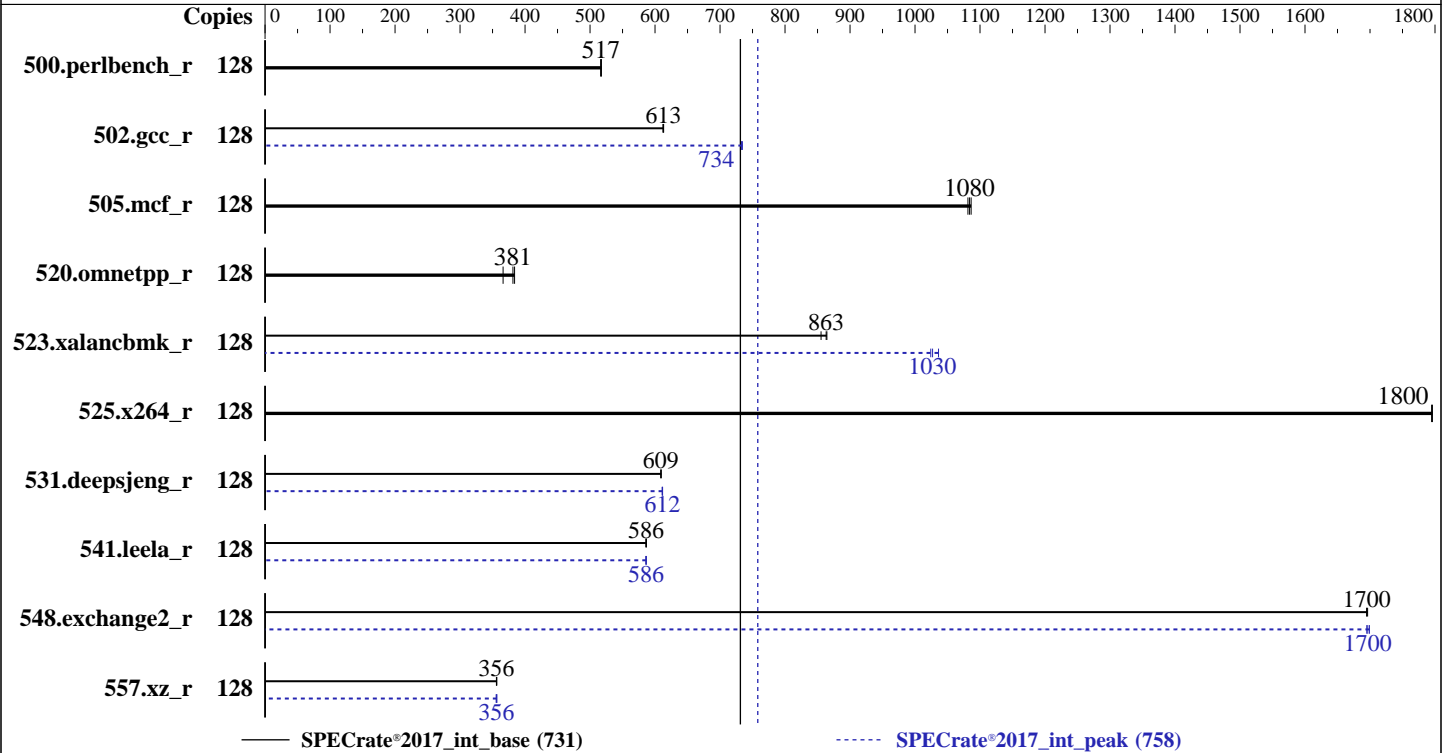

## Hardware

CPU Name: AMD EPYC 9334  
 Max MHz: 3900  
 Nominal: 2700  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 128 MB I+D on chip per chip, 32 MB shared / 8 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 1 TB NVME SSD  
 Other: None

## Software

OS: Red Hat Enterprise Linux release 9 (Plow)  
 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 04.02.14 released Dec-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Feb-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Nov-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	<b>394</b>	<b>517</b>	394	517	395	516	128	<b>394</b>	<b>517</b>	394	517	395	516
502.gcc_r	128	296	612	<b>296</b>	<b>613</b>	296	613	128	<b>247</b>	<b>734</b>	247	733	247	734
505.mcf_r	128	191	1080	<b>191</b>	<b>1080</b>	190	1090	128	191	1080	<b>191</b>	<b>1080</b>	190	1090
520.omnetpp_r	128	459	366	437	384	<b>440</b>	<b>381</b>	128	459	366	437	384	<b>440</b>	<b>381</b>
523.xalancbmk_r	128	<b>157</b>	<b>863</b>	156	864	158	855	128	130	1040	<b>132</b>	<b>1030</b>	132	1020
525.x264_r	128	125	1800	125	1790	<b>125</b>	<b>1800</b>	128	125	1800	125	1790	<b>125</b>	<b>1800</b>
531.deepsjeng_r	128	241	609	241	610	<b>241</b>	<b>609</b>	128	240	611	<b>240</b>	<b>612</b>	240	612
541.leela_r	128	<b>362</b>	<b>586</b>	362	586	361	587	128	362	586	<b>361</b>	<b>586</b>	361	587
548.exchange2_r	128	198	1700	<b>198</b>	<b>1700</b>	198	1690	128	198	1700	197	1700	<b>198</b>	<b>1700</b>
557.xz_r	128	<b>388</b>	<b>356</b>	388	357	388	356	128	388	357	<b>388</b>	<b>356</b>	389	356

SPECrate®2017\_int\_base = 731

SPECrate®2017\_int\_peak = 758

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root.  
To enable THP for all allocations for peak runs,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

**CPU2017 License:** 3358

**Test Date:** Jun-2023

**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Hardware Availability:** Feb-2023

**Tested by:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Software Availability:** Nov-2022

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/CPU2017/amd_rate_aocc400_genoa_B_lib/lib:/home/CPU2017/amd_rate_aocc400_genoa_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

```
MALLOC_CONF = "thp:never"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

```
SVM Mode = disable
DRAM Scrub time = disable
NUMA nodes per socket = NPS4
Determinism Slider = Power
cTDP = 400
Package Power Limit = 400
```

```
Sysinfo program /home/CPU2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Jun  2 12:23:13 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9\_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent\_hugepage
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Feb-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Nov-2022

## Platform Notes (Continued)

- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64 x86_64
x86_64 GNU/Linux
```

```
2. w
12:23:13 up 2 min, 1 user, load average: 0.41, 0.38, 0.16
USER      TTY      LOGIN@  IDLE   JCPU   PCPU WHAT
root     tty1    12:21   15.00s  1.19s  0.13s /bin/bash ./amd_rate_aocc400_genoa_B1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 6191158
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 6191158
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
python3 ./run_amd_rate_aocc400_genoa_B1.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune all --reportable --iterations 3 --nopower --runmode
rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.022/templogs/preenv.intrate.022.0.log --lognum 022.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/CPU2017
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9334 32-Core Processor
vendor_id      : AuthenticAMD
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Feb-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Nov-2022

## Platform Notes (Continued)

```

cpu family      : 25
model          : 17
stepping       : 1
microcode      : 0xa101111
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 32
siblings       : 64
2 physical ids (chips)
128 processors (hardware threads)
physical id 0: core ids 0-31
physical id 1: core ids 0-31
physical id 0: apicids 0-63
physical id 1: apicids 64-127

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

### 7. lscpu

From lscpu from util-linux 2.37.4:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              AuthenticAMD
BIOS Vendor ID:        Advanced Micro Devices, Inc.
Model name:             AMD EPYC 9334 32-Core Processor
BIOS Model name:       AMD EPYC 9334 32-Core Processor
CPU family:            25
Model:                  17
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
Stepping:               1
Frequency boost:        enabled
CPU max MHz:           3910.2529
CPU min MHz:           1500.0000
BogoMIPS:               5400.13
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512v1 xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                        svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization:         AMD-V
L1d cache:              2 MiB (64 instances)
L1i cache:              2 MiB (64 instances)

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Feb-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Nov-2022

## Platform Notes (Continued)

```

L2 cache:                64 MiB (64 instances)
L3 cache:                256 MiB (8 instances)
NUMA node(s):            8
NUMA node0 CPU(s):       0-7,64-71
NUMA node1 CPU(s):       8-15,72-79
NUMA node2 CPU(s):       16-23,80-87
NUMA node3 CPU(s):       24-31,88-95
NUMA node4 CPU(s):       32-39,96-103
NUMA node5 CPU(s):       40-47,104-111
NUMA node6 CPU(s):       48-55,112-119
NUMA node7 CPU(s):       56-63,120-127
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf:       Not affected
Vulnerability Mds:        Not affected
Vulnerability Meltdown:   Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:  Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:  Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                             filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	2M	8	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	1M	64M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 193340 MB
node 0 free: 192584 MB
node 1 cpus: 8-15,72-79
node 1 size: 193522 MB
node 1 free: 192951 MB
node 2 cpus: 16-23,80-87
node 2 size: 193522 MB
node 2 free: 192932 MB
node 3 cpus: 24-31,88-95
node 3 size: 193522 MB
node 3 free: 192906 MB
node 4 cpus: 32-39,96-103
node 4 size: 193522 MB
node 4 free: 192952 MB
node 5 cpus: 40-47,104-111
node 5 size: 193522 MB
node 5 free: 192816 MB
node 6 cpus: 48-55,112-119
node 6 size: 193486 MB
node 6 free: 192939 MB
node 7 cpus: 56-63,120-127
node 7 size: 193454 MB
node 7 free: 192859 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 32 32 32 32

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Feb-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Nov-2022

## Platform Notes (Continued)

```

1: 12 10 12 12 32 32 32 32
2: 12 12 10 12 32 32 32 32
3: 12 12 12 10 32 32 32 32
4: 32 32 32 32 10 12 12 12
5: 32 32 32 32 12 10 12 12
6: 32 32 32 32 12 12 10 12
7: 32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
MemTotal:      1585043244 kB

```

```

-----
10. who -r
run-level 3 Jun 2 12:21

```

```

-----
11. Systemd service manager version: systemd 250 (250-6.el9_0)
Default Target Status
multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled dbus-broker getty@ lvm2-monitor microcode systemd-network-generator tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd
blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd console-getty cpupower crond
debug-shell firewalld hwloc-dump-hwdata irqbalance kdump kvm_stat
man-db-restart-cache-update mdmonitor nftables nis-domainname rdisc rhsm rhsm-facts
rshmcertd rpmdb-rebuild rsyslog selinux-autorelabel-mark serial-getty@ sshd sshd-keygen@
sssd systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap

```

```

-----
14. cpupower frequency-info
analyzing CPU 0:
current policy: frequency should be within 1.50 GHz and 2.70 GHz.
The governor "performance" may decide which speed to use
within this range.

boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 2700MHz

```

```

-----
15. tuned-adm active
Current active profile: throughput-performance

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Feb-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Nov-2022

## Platform Notes (Continued)

```

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
-----

17. /sys/kernel/mm/transparent_hugepage
defrag          [always] defer defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force
-----

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs  10000
-----

19. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
system-release  Red Hat Enterprise Linux release 9.0 (Plow)
-----

20. Disk information
SPEC is set to: /home/CPU2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-home xfs  819G  22G  797G   3% /home
-----

21. /sys/devices/virtual/dmi/id
Vendor:          IEI
Product:         NF5280A7
Product Family:  Not specified
Serial:          000000000

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Feb-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Nov-2022

## Platform Notes (Continued)

### 22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

#### Memory:

1x Samsung M321R8GA0BB0-CQKDS 64 GB 2 rank 4800  
23x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends International, LLC.  
BIOS Version: 04.02.14  
BIOS Date: 12/29/2022

## Compiler Version Notes

C | 502.gcc\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

C | 502.gcc\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Feb-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

C++ | 523.xalancbmk\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

C++ | 523.xalancbmk\_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

Fortran | 548.exchange2\_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC\_4.0.0-Build#389 2022\_10\_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Feb-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Nov-2022

## Base Compiler Invocation (Continued)

Fortran benchmarks:

flang

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Feb-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Feb-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Nov-2022

## Peak Portability Flags (Continued)

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

502.gcc\_r: -m32 -flto -z muldefs -Ofast -march=znver4  
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7  
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline  
-lamdalloc

505.mcf\_r: basepeak = yes

525.x264\_r: basepeak = yes

557.xz\_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-fstruct-layout=7 -mllvm -unroll-threshold=50  
-fremap-arrays -fstrip-mining  
-mllvm -inline-threshold=1000  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive  
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM  
-ffast-math -finline-aggressive  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdalloc-ext

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

CPU2017 License: 3358

Test Date: Jun-2023

Test Sponsor: Inspur Electronic Information Industry Co., Ltd. (IEI)

Hardware Availability: Feb-2023

Tested by: Inspur Electronic Information Industry Co., Ltd. (IEI)

Software Availability: Nov-2022

## Peak Optimization Flags (Continued)

```
531.deepsjeng_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lamdalloc-ext
```

```
541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v118/aocc4/b1/rate/amd\_rate\_aocc400\_genoa\_B\_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk\_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v118/aocc4/b1/rate/amd\_rate\_aocc400\_genoa\_B\_lib/lib32

Fortran benchmarks:

-Wno-unused-command-line-argument



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Inspur Electronic Information Industry Co., Ltd.  
(IEI)

SPECrate®2017\_int\_base = 731

NF5280A7 (AMD EPYC 9334)

SPECrate®2017\_int\_peak = 758

**CPU2017 License:** 3358

**Test Date:** Jun-2023

**Test Sponsor:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Hardware Availability:** Feb-2023

**Tested by:** Inspur Electronic Information Industry Co., Ltd. (IEI)

**Software Availability:** Nov-2022

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V3.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V3.0.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-02 12:23:12-0400.

Report generated on 2023-06-20 23:28:38 by CPU2017 PDF formatter v6716.

Originally published on 2023-06-20.