



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Gold 6454S, 2.20GHz

SPECrate®2017\_int\_base = 554

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Aug-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

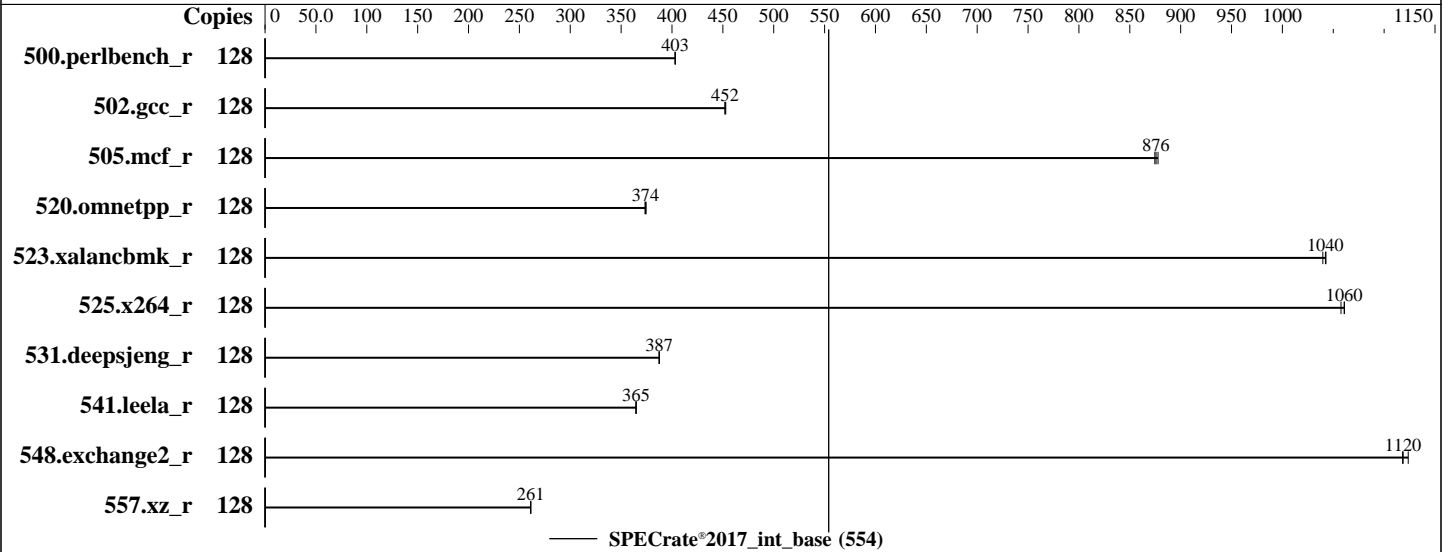

### Hardware

CPU Name: Intel Xeon Gold 6454S  
 Max MHz: 3400  
 Nominal: 2200  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x SATA SSD, 1.92TB  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP4  
 5.14.21-150400.22-default  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Fujitsu BIOS Version V1.0.0.0 R1.7.0 for D3982-A1x. Released May-2023  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Gold 6454S,  
2.20GHz

SPECrate®2017\_int\_base = 554

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Aug-2023  
Hardware Availability: Mar-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	<b>505</b>	<b>403</b>	505	403	506	403							
502.gcc_r	128	400	453	<b>401</b>	<b>452</b>	401	452							
505.mcf_r	128	<b>236</b>	<b>876</b>	236	878	237	875							
520.omnetpp_r	128	448	375	<b>449</b>	<b>374</b>	450	373							
523.xalancbmk_r	128	130	1040	130	1040	<b>130</b>	<b>1040</b>							
525.x264_r	128	212	1060	211	1060	<b>211</b>	<b>1060</b>							
531.deepsjeng_r	128	<b>379</b>	<b>387</b>	379	387	379	388							
541.leela_r	128	<b>581</b>	<b>365</b>	581	365	581	365							
548.exchange2_r	128	298	1120	<b>300</b>	<b>1120</b>	300	1120							
557.xz_r	128	<b>529</b>	<b>261</b>	529	261	530	261							

SPECrate®2017\_int\_base = 554

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/Benchmark/speccpu_1.1.9/lib/intel64:/home/Benchmark/speccpu_1.1.9/lib/ia32:/home/Benchmark/spec
cpu_1.1.9/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Gold 6454S,  
2.20GHz

SPECrate®2017\_int\_base = 554

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Aug-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Dec-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
 memory using Red Hat Enterprise Linux 8.4  
 Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
 sync; echo 3> /proc/sys/vm/drop\_caches  
 runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>  
 NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
 is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
 is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
 is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
 DCU Streamer Prefetcher = Disabled  
 Package C State limit = C0  
 CPU Performance Boost = Aggressive  
 SNC (Sub NUMA) = Enable SNC4  
 FAN Control = Full

Sysinfo program /home/Benchmark/speccpu\_1.1.9/bin/sysinfo  
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
 running on localhost Thu Aug 10 05:05:13 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent\_hugepage
17. /sys/kernel/mm/transparent\_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS

-----  
1. uname -a

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Gold 6454S,  
2.20GHz

SPECrate®2017\_int\_base = 554

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Aug-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT\_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)  
x86\_64 x86\_64 x86\_64 GNU/Linux

-----  
2. w  
05:05:13 up 2 min, 1 user, load average: 1.80, 1.67, 0.70  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 05:04 9.00s 2.08s 0.09s -bash

-----  
3. Username  
From environment variable \$USER: root

-----  
4. ulimit -a  
core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 4125252  
max locked memory (kbytes, -l) 64  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 4125252  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

-----  
5. sysinfo process ancestry  
/usr/lib/systemd/systemd --switched-root --system --deserialize 30  
login -- root  
-bash  
-bash  
runcpu --define default-platform-flags --define numcopies=128 -c  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base -o all intrate  
runcpu --define default-platform-flags --define numcopies=128 --configfile  
ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=64 --define physicalfirst  
--define invoke\_with\_interleave --define drop\_caches --tune base --output\_format all --nopower --runmode  
rate --tune base --size refrate intrate --nopreenv --note-preenv --logfile  
\$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from\_runcpu 2  
specperl \$SPEC/bin/sysinfo  
\$SPEC = /home/Benchmark/speccpu\_1.1.9

-----  
6. /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6454S  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 143  
stepping : 8  
microcode : 0x2b0001b0  
bugs : spectre\_v1 spectre\_v2 spec\_store\_bypass swapgs  
cpu cores : 32  
siblings : 64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Gold 6454S,  
2.20GHz

SPECrate®2017\_int\_base = 554

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Aug-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

2 physical ids (chips)  
128 processors (hardware threads)  
physical id 0: core ids 0-31  
physical id 1: core ids 0-31  
physical id 0: apicids 0-63  
physical id 1: apicids 128-191

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.37.2:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 128
On-line CPU(s) list:   0-127
Vendor ID:              GenuineIntel
Model name:             Intel(R) Xeon(R) Gold 6454S
CPU family:             6
Model:                  143
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
Stepping:               8
CPU max MHz:           3400.0000
CPU min MHz:           800.0000
BogoMIPS:               4400.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperfperf tsc_known_freq pni pclmulqdq dtes64 monitor
                        ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                        sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                        lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                        invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                        tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                        avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                        xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                        cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                        arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                        ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                        enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                        amx_tile flush_lld arch_capabilities
Virtualization:        VT-x
L1d cache:             3 MiB (64 instances)
L1i cache:             2 MiB (64 instances)
L2 cache:              128 MiB (64 instances)
L3 cache:              120 MiB (2 instances)
NUMA node(s):          8
NUMA node0 CPU(s):    0-7,64-71
NUMA node1 CPU(s):    8-15,72-79
NUMA node2 CPU(s):    16-23,80-87
NUMA node3 CPU(s):    24-31,88-95
NUMA node4 CPU(s):    32-39,96-103
NUMA node5 CPU(s):    40-47,104-111

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Gold 6454S,  
2.20GHz

SPECrate®2017\_int\_base = 554

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Aug-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

NUMA node6 CPU(s):          48-55,112-119
NUMA node7 CPU(s):          56-63,120-127
Vulnerability Itlb multihit: Not affected
Vulnerability Lltf:         Not affected
Vulnerability Mds:         Not affected
Vulnerability Meltdown:    Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:   Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:   Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:       Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3M	12	Data	1	64	1	64
L1i	32K	2M	8	Instruction	1	64	1	64
L2	2M	128M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-7,64-71
node 0 size: 128600 MB
node 0 free: 126901 MB
node 1 cpus: 8-15,72-79
node 1 size: 128985 MB
node 1 free: 128573 MB
node 2 cpus: 16-23,80-87
node 2 size: 129019 MB
node 2 free: 128682 MB
node 3 cpus: 24-31,88-95
node 3 size: 129019 MB
node 3 free: 128740 MB
node 4 cpus: 32-39,96-103
node 4 size: 129019 MB
node 4 free: 128712 MB
node 5 cpus: 40-47,104-111
node 5 size: 129019 MB
node 5 free: 128734 MB
node 6 cpus: 48-55,112-119
node 6 size: 129019 MB
node 6 free: 128727 MB
node 7 cpus: 56-63,120-127
node 7 size: 128651 MB
node 7 free: 128311 MB
node distances:
node  0  1  2  3  4  5  6  7
0:  10 12 12 12 21 21 21 21
1:  12 10 12 12 21 21 21 21
2:  12 12 10 12 21 21 21 21
3:  12 12 12 10 21 21 21 21
4:  21 21 21 21 10 12 12 12
5:  21 21 21 21 12 10 12 12
6:  21 21 21 21 12 12 10 12
7:  21 21 21 21 12 12 12 10

```

9. /proc/meminfo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Gold 6454S,  
2.20GHz

SPECrate®2017\_int\_base = 554

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Aug-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

MemTotal: 1056088896 kB

-----  
10. who -r  
run-level 3 Aug 10 05:03  
-----

11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)  
Default Target Status  
multi-user running  
-----

12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ haveged  
irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog libvirtd lvm2-monitor  
nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4  
wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait  
chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables exchange-bmc-os-info  
firewalld gpm grub2-once haveged-switch-root ipmi ipmievdev iscsi-init iscsid  
issue-add-ssh-keys kexec-load ksm kvm\_stat libvirt-guests lunmask man-db-create multipathd  
nfs nfs-blkmap nfs-server nfsserver rdisc rpcbind rpmconfigcheck rsyncd serial-getty@  
smartd\_generate\_opts snmpd snmptrapd strongswan strongswan-starter svnserv  
systemd-boot-check-no-failures systemd-network-generator systemd-nspawn@ systemd-sysext  
systemd-time-wait-sync systemd-timesyncd tcsd udisks2 virtinterfaced virtnetworkd  
virtnodevd virtnwfilterd virtproxyd virtqemu virtsecret virtstoraged  
indirect pcsd virtlockd virtlogd wickedd  
-----

13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default  
root=UUID=d30c551f-4053-4d84-b193-d58b0e7f8e71  
splash=silent  
resume=/dev/disk/by-uuid/95d2bf7-ef8a-4586-83dd-71dbdb19c4eb  
mitigations=auto  
quiet  
security=apparmor  
crashkernel=321M,high  
crashkernel=72M,low  
-----

14. cpupower frequency-info  
analyzing CPU 0:  
current policy: frequency should be within 800 MHz and 3.40 GHz.  
The governor "powersave" may decide which speed to use  
within this range.  
boost state support:  
Supported: yes  
Active: yes  
-----

15. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Gold 6454S,  
2.20GHz

SPECrate®2017\_int\_base = 554

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Aug-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

### Platform Notes (Continued)

```

vm.dirty_expire_centisecs    3000
vm.dirty_ratio               20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold         500
vm.min_unmapped_ratio        1
vm.nr_hugepages              0
vm.nr_hugepages_mempolicy    0
vm.nr_overcommit_hugepages   0
vm.swappiness                 60
vm.watermark_boost_factor    15000
vm.watermark_scale_factor    10
vm.zone_reclaim_mode         0

```

```

-----
16. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvise [madvise] never
enabled         [always] madvise never
hpage_pmd_size 2097152
shmem_enabled   always within_size advise [never] deny force

```

```

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none         511
max_ptes_shared       256
max_ptes_swap         64
pages_to_scan         4096
scan_sleep_millisecs 10000

```

```

-----
18. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP4

```

```

-----
19. Disk information
SPEC is set to: /home/Benchmark/speccpu_1.1.9
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        btrfs 781G  11G  769G   2% /home

```

```

-----
20. /sys/devices/virtual/dmi/id
Vendor:          FUJITSU
Product:         PRIMERGY RX2530 M7
Product Family: SERVER
Serial:          EWCDxxxxxx

```

```

-----
21. dmidecode
Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  2x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
 14x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Gold 6454S,  
2.20GHz

SPECrate®2017\_int\_base = 554

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Aug-2023  
**Hardware Availability:** Mar-2023  
**Software Availability:** Dec-2022

## Platform Notes (Continued)

-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: FUJITSU  
BIOS Version: V1.0.0.0 R1.7.0 for D3982-A1x  
BIOS Date: 05/25/2023  
BIOS Revision: 1.7  
Firmware Revision: 2.0

## Compiler Version Notes

-----  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base) 557.xz\_r(base)  
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

-----  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base) 541.leela\_r(base)  
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

-----  
Fortran | 548.exchange2\_r(base)  
-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:  
icx

C++ benchmarks:  
icpx

Fortran benchmarks:  
ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2530 M7, Intel Xeon Gold 6454S,  
2.20GHz

SPECrate®2017\_int\_base = 554

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Aug-2023

Hardware Availability: Mar-2023

Software Availability: Dec-2022

## Base Portability Flags (Continued)

```
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-09 16:05:12-0400.

Report generated on 2024-01-29 18:05:27 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-29.