



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro


A+ Server AS -1115SV-WTNRT
(H13SVW-NT, AMD EPYC 8224P)

SPECrate®2017_int_base = 208

SPECrate®2017_int_peak = 218

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Aug-2023

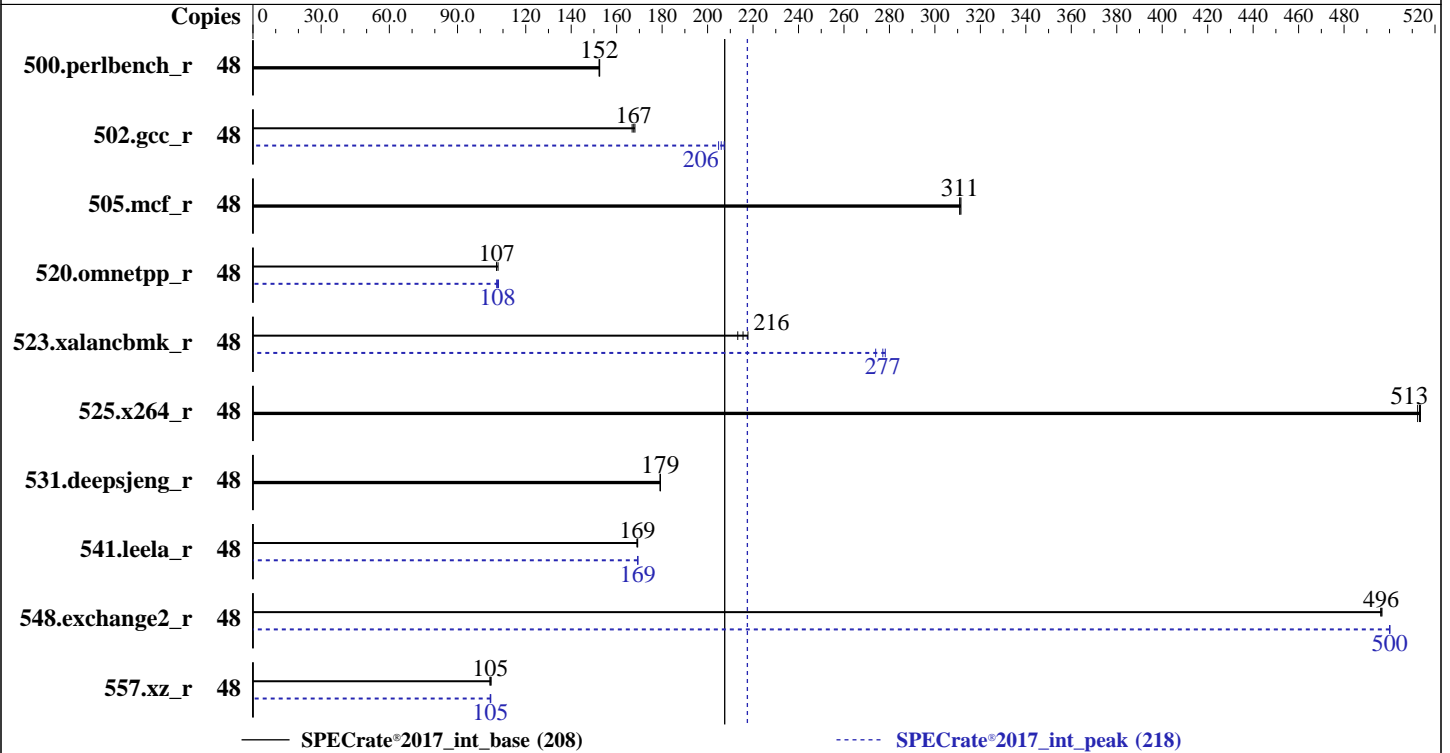

Hardware

CPU Name: AMD EPYC 8224P
 Max MHz: 3000
 Nominal: 2550
 Enabled: 24 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip, 16 MB shared / 6 cores
 Other: None
 Memory: 384 GB (6 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 4 TB NVMe SSD
 Other: None

Software

OS: Ubuntu 22.04.3 LTS
 Kernel 5.15.0-79-generic
 Compiler: C/C++/Fortran: Version 4.0.0 of AOCC
 Parallel: No
 Firmware: Version 1.0 released Aug-2023
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT, AMD EPYC 8224P)

SPECrate®2017_int_base = 208

SPECrate®2017_int_peak = 218

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Aug-2023

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	502	152	501	152	501	153	48	502	152	501	152	501	153
502.gcc_r	48	406	167	407	167	404	168	48	328	207	332	205	330	206
505.mcf_r	48	249	311	249	311	249	311	48	249	311	249	311	249	311
520.omnetpp_r	48	584	108	588	107	587	107	48	583	108	588	107	586	108
523.xalancbmk_r	48	238	213	235	216	233	218	48	185	274	182	278	183	277
525.x264_r	48	164	514	164	512	164	513	48	164	514	164	512	164	513
531.deepsjeng_r	48	307	179	307	179	307	179	48	307	179	307	179	307	179
541.leela_r	48	471	169	470	169	470	169	48	470	169	470	169	470	169
548.exchange2_r	48	253	497	253	496	253	496	48	251	500	252	500	251	500
557.xz_r	48	496	105	495	105	497	104	48	497	104	496	105	496	105

SPECrate®2017_int_base = **208**

SPECrate®2017_int_peak = **218**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
To enable THP for all allocations for peak runs,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT, AMD EPYC 8224P)

SPECrate®2017_int_base = 208

SPECrate®2017_int_peak = 218

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Aug-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/root/cpu2017znver4A1.1/amd_rate_aocc400_znver4_A_lib/lib:/root/cpu2017znver4A1.1/amd_rate_aocc400_zn
ver4_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

```
MALLOC_CONF = "thp:never"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

```
Determinism Control = Manual
Determinism Enable = Disable Performance Determinism
cTDP Control = Manual
cTDP = 225
Package Power Limit Control = Manual
Package Power Limit = 225
TSME = Disabled
SEV Control = Disabled
```

```
Sysinfo program /root/cpu2017znver4A1.1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on smcsienacpu2017 Wed Aug 23 00:11:44 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.9)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT, AMD EPYC 8224P)

SPECrate®2017_int_base = 208

SPECrate®2017_int_peak = 218

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Aug-2023

Platform Notes (Continued)

- 16. sysctl
- 17. /sys/kernel/mm/transparent_hugepage
- 18. /sys/kernel/mm/transparent_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux smcsienacpu2017 5.15.0-79-generic #86-Ubuntu SMP Mon Jul 10 16:07:21 UTC 2023 x86_64 x86_64 x86_64
GNU/Linux
```

```
2. w
00:11:44 up 4 min,  2 users,  load average: 0.04, 0.31, 0.18
USER      TTY      FROM          LOGIN@      IDLE        JCPU   PCPU WHAT
root      tty1    -             00:09       2:24       0.08s   0.00s -bash
root      pts/1   10.217.3.54:S.0 00:11       8.00s     1.13s   0.04s /bin/bash ./amd_rate_aocc400_znver4_A1.sh
```

```
3. Username
From environment variable $USER:  root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)       unlimited
stack(kbytes)      unlimited
coredump(blocks)   0
memory(kbytes)     unlimited
locked memory(kbytes) 2097152
process            1545516
nofiles            1024
vmemory(kbytes)    unlimited
locks              unlimited
rtprio             0
```

```
5. sysinfo process ancestry
/sbin/init
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root@pts/0
-bash
screen -S cpu
SCREEN -S cpu
/bin/bash
python3 ./run_amd_rate_aocc400_znver4_A1.py
/bin/bash ./amd_rate_aocc400_znver4_A1.sh
runcpu --config amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /root/cpu2017znver4A1.1
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT, AMD EPYC 8224P)

SPECrate®2017_int_base = 208

SPECrate®2017_int_peak = 218

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Aug-2023

Platform Notes (Continued)

```
6. /proc/cpuinfo
model name      : AMD EPYC 8224P 24-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 25
model          : 160
stepping       : 2
microcode      : 0xaa0020f
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 3584 4K pages
cpu cores      : 24
siblings       : 48
1 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-5,8-13,16-21,24-29
physical id 0: apicids 0-11,16-27,32-43,48-59
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

7. lscpu

From lscpu from util-linux 2.37.2:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:             Little Endian
CPU(s):                 48
On-line CPU(s) list:   0-47
Vendor ID:              AuthenticAMD
Model name:             AMD EPYC 8224P 24-Core Processor
CPU family:             25
Model:                  160
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):              1
Stepping:               2
Frequency boost:       enabled
CPU max MHz:            3008.2029
CPU min MHz:           1500.0000
BogoMIPS:               5092.51
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                        avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt
                        lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                        pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                        umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                        avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d

Virtualization:        AMD-V
L1d cache:             768 KiB (24 instances)
L1i cache:             768 KiB (24 instances)
L2 cache:              24 MiB (24 instances)
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT, AMD EPYC 8224P)

SPECrate®2017_int_base = 208

SPECrate®2017_int_peak = 218

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Aug-2023

Platform Notes (Continued)

```

L3 cache: 64 MiB (4 instances)
NUMA node(s): 1
NUMA node0 CPU(s): 0-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
filling, PBRSE-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	768K	8	Data	1	64	1	64
L1i	32K	768K	8	Instruction	1	64	1	64
L2	1M	24M	8	Unified	2	2048	1	64
L3	16M	64M	16	Unified	3	16384	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 1 nodes (0)
node 0 cpus: 0-47
node 0 size: 386493 MB
node 0 free: 385121 MB
node distances:
node 0
0: 10

```

9. /proc/meminfo

MemTotal: 395769376 kB

10. who -r

run-level 5 Aug 23 00:09

11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.9)

```

Default Target Status
graphical degraded

```

12. Failed units, from systemctl list-units --state=failed

```

UNIT                                LOAD ACTIVE SUB DESCRIPTION
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

```

13. Services, from systemctl list-unit-files

```

STATE UNIT FILES
enabled ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
grub-common grub-initrd-fallback irqbalance keyboard-setup lvm2-monitor lxd-agent
multipathd networkd-dispatcher nvme-fc-boot-connections nvme-autoconnect open-iscsi
open-vm-tools pollinate rsyslog secureboot-db setvtrgb snapd ssh systemd-networkd

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT, AMD EPYC 8224P)

SPECrate®2017_int_base = 208

SPECrate®2017_int_peak = 218

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Aug-2023

Platform Notes (Continued)

```

systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald
ua-reboot-cmds ubuntu-advantage udisks2 ufw unattended-upgrades vgauth
enabled-runtime netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
disabled console-getty debug-shell ipmievd iscsid nftables rsync serial-getty@
systemd-boot-check-no-failures systemd-network-generator systemd-sysext
systemd-time-wait-sync upower
generated apport openipmi
indirect uuid
masked cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
x11-common

```

```

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-5.15.0-79-generic
root=UUID=blf703cd-blaa-4ada-a083-50dc8f47c86c
ro

```

```

-----
15. cpupower frequency-info
analyzing CPU 0:
  current policy: frequency should be within 1.50 GHz and 2.55 GHz.
                   The governor "performance" may decide which speed to use
                   within this range.

  boost state support:
    Supported: yes
    Active: yes
    Boost States: 0
    Total States: 3
    Pstate-P0: 2550MHz

```

```

-----
16. sysctl
kernel.numa_balancing          0
kernel.randomize_va_space     0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                  1
vm.watermark_boost_factor     15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode          1

```

```

-----
17. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvise madvise never
enabled     [always] madvise never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT, AMD EPYC 8224P)

SPECrate®2017_int_base = 208

SPECrate®2017_int_peak = 218

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Aug-2023

Platform Notes (Continued)

18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag 1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000

19. OS release
From /etc/*-release /etc/*-version
os-release Ubuntu 22.04.3 LTS

20. Disk information
SPEC is set to: /root/cpu2017znver4A1.1
Filesystem Type Size Used Avail Use% Mounted on
/dev/nvme0n1p2 ext4 3.5T 17G 3.3T 1% /

21. /sys/devices/virtual/dmi/id
Vendor: Supermicro
Product: Super Server
Product Family: SMC H13
Serial: 123456789

22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
Memory:
6x Micron Technology MTC40F2046S1RC48BA1 64 GB 2 rank 4800

23. BIOS
(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 1.0
BIOS Date: 08/11/2023
BIOS Revision: 5.30

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT, AMD EPYC 8224P)

SPECrate®2017_int_base = 208

SPECrate®2017_int_peak = 218

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Aug-2023

Compiler Version Notes (Continued)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C | 502.gcc_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
557.xz_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base,
peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++ | 523.xalancbmk_r(peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base) 531.deepsjeng_r(base, peak) 541.leela_r(base,
peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT, AMD EPYC 8224P)

SPECrate®2017_int_base = 208

SPECrate®2017_int_peak = 218

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Aug-2023

Compiler Version Notes (Continued)

Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Fortran | 548.exchange2_r(base, peak)

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-z muldefs -O3 -march=znver4 -fveclib=AMDLIBM -ffast-math

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT, AMD EPYC 8224P)

SPECrate®2017_int_base = 208

SPECrate®2017_int_peak = 218

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Aug-2023

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc
```

C++ benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3
-march=znver4 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT, AMD EPYC 8224P)

SPECrate®2017_int_base = 208

SPECrate®2017_int_peak = 218

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Aug-2023

Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

```
502.gcc_r: -m32 -flto -z muldefs -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-landalloc
```

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

```
557.xz_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT, AMD EPYC 8224P)

SPECrate®2017_int_base = 208

SPECrate®2017_int_peak = 218

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Aug-2023

Peak Optimization Flags (Continued)

557.xz_r (continued):

```
-mllvm -reduce-array-computations=3 -zopt -lamdlibm  
-lflang -lamdalloc
```

C++ benchmarks:

```
520.omnetpp_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdlibm -lamdalloc-ext
```

```
523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=aggressive  
-fno-loop-reroll -Ofast -march=znver4 -fveclib=AMDLIBM  
-ffast-math -finline-aggressive  
-mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt  
-mllvm -do-block-reorder=aggressive  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdalloc-ext
```

531.deepsjeng_r: basepeak = yes

```
541.leela_r: -m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-finline-aggressive -mllvm -unroll-threshold=100  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden  
-lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -flto -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM  
-ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Supermicro

A+ Server AS -1115SV-WTNRT
(H13SVW-NT, AMD EPYC 8224P)

SPECrate®2017_int_base = 208

SPECrate®2017_int_peak = 218

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Aug-2023
Hardware Availability: Sep-2023
Software Availability: Aug-2023

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc4/znver4/rate/amd_rate_aocc400_znver4_A_lib/lib32

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Siena-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.2023-09-13.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-Siena-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-22 20:11:43-0400.

Report generated on 2023-09-18 11:39:33 by CPU2017 PDF formatter v6716.

Originally published on 2023-09-18.